



North/Latin America
Europe/Africa
Asia/Oceania

Internal Use Only

<http://aic.lgservice.com>
<http://eic.lgservice.com>
<http://biz.lgservice.com>

LED LCD TV

SERVICE MANUAL

CHASSIS : LD12E

MODEL : 32LV5500/550T/550W
32LV5500/550T/550W-ZC

CAUTION

BEFORE SERVICING THE CHASSIS,
READ THE SAFETY PRECAUTIONS IN THIS MANUAL.



P/NO : MFL67002327 (1103-REV00)

Printed in Korea

CONTENTS

CONTENTS	2
PRODUCT SAFETY	3
SPECIFICATION	4
ADJUSTMENT INSTRUCTION	10
DISASSEMBLY	19
BLOCK DIAGRAM	21
EXPLODED VIEW	22
SCHEMATIC CIRCUIT DIAGRAM	

SAFETY PRECAUTIONS

IMPORTANT SAFETY NOTICE

Many electrical and mechanical parts in this chassis have special safety-related characteristics. These parts are identified by \triangle in the Schematic Diagram and Exploded View.

It is essential that these special safety parts should be replaced with the same components as recommended in this manual to prevent Shock, Fire, or other Hazards.

Do not modify the original design without permission of manufacturer.

General Guidance

An **isolation Transformer** should always be used during the servicing of a receiver whose chassis is not isolated from the AC power line. Use a transformer of adequate power rating as this protects the technician from accidents resulting in personal injury from electrical shocks.

It will also protect the receiver and its components from being damaged by accidental shorts of the circuitry that may be inadvertently introduced during the service operation.

If any fuse (or Fusible Resistor) in this TV receiver is blown, replace it with the specified.

When replacing a high wattage resistor (Oxide Metal Film Resistor, over 1 W), keep the resistor 10 mm away from PCB.

Keep wires away from high voltage or high temperature parts.

Before returning the receiver to the customer,

always perform an **AC leakage current check** on the exposed metallic parts of the cabinet, such as antennas, terminals, etc., to be sure the set is safe to operate without damage of electrical shock.

Leakage Current Cold Check(Antenna Cold Check)

With the instrument AC plug removed from AC source, connect an electrical jumper across the two AC plug prongs. Place the AC switch in the on position, connect one lead of ohm-meter to the AC plug prongs tied together and touch other ohm-meter lead in turn to each exposed metallic parts such as antenna terminals, phone jacks, etc.

If the exposed metallic part has a return path to the chassis, the measured resistance should be between 1 M Ω and 5.2 M Ω .

When the exposed metal has no return path to the chassis the reading must be infinite.

An other abnormality exists that must be corrected before the receiver is returned to the customer.

Leakage Current Hot Check (See below Figure)

Plug the AC cord directly into the AC outlet.

Do not use a line Isolation Transformer during this check.


Connect 1.5 K / 10 watt resistor in parallel with a 0.15 μ F capacitor between a known good earth ground (Water Pipe, Conduit, etc.) and the exposed metallic parts.

Measure the AC voltage across the resistor using AC voltmeter with 1000 ohms/volt or more sensitivity.

Reverse plug the AC cord into the AC outlet and repeat AC voltage measurements for each exposed metallic part. Any voltage measured must not exceed 0.75 volt RMS which corresponds to 0.5 mA.

In case any measurement is out of the limits specified, there is possibility of shock hazard and the set must be checked and repaired before it is returned to the customer.

Leakage Current Hot Check circuit

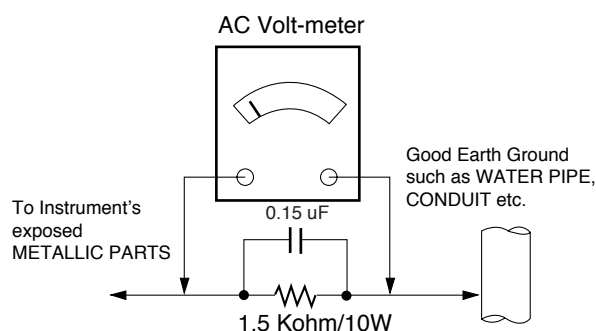

When 25A is impressed between Earth and 2nd Ground for 1 second, Resistance must be less than 0.1 Ω

*Base on Adjustment standard

SPECIFICATION

NOTE : Specifications and others are subject to change without notice for improvement.

1. Application range

This specification is applied to the LED LCD TV used LD12E chassis.

3. Test method

- 1) Performance: LGE TV test method followed
- 2) Demanded other specification
 - Safety : CE, IEC specification
 - EMC :CE, IEC

2. Requirement for Test

Each part is tested as below without special appointment.

- 1) Temperature: 25 °C ± 5 °C(77 °F ± 9 °F), CST: 40 °C ± 5 °C
- 2) Relative Humidity: 65 % ± 10 %
- 3) Power Voltage
 - : Standard input voltage (AC 100-240 V~, 50/60 Hz)
 - * Standard Voltage of each products is marked by models.
- 4) Specification and performance of each parts are followed each drawing and specification by part number in accordance with BOM.
- 5) The receiver must be operated for about 5 minutes prior to the adjustment.

4. Model General Specification

No.	Item	Specification	Remarks
1	Market	EU(PAL Market-36Countries)	DTV & Analog (Total 36 countries) DTV (MPEG2/4, DVB-T) : 31 countries (England/Italy/Germany/France/Spain/Sweden/Finland/Netherlands/Belgium/Luxemburg/Greece/Denmark/Czech/Austria/Hungary/Swiss/Croatia/Turkey/Norway/Slovenia/Poland/Ukraine/Portugal/Ireland/Morocco/Latvia/Estonia/Lithuania/Rumania/Russia/Slovakia) DTV (MPEG2/4, DVB-T2): 5 countries (England/Denmark/Sweden/Finland/Norway) DTV (MPEG2/4, DVB-C): 10 countries Sweden/Finland/Austria/Swiss/Germany/Netherlands/Hungary/Slovenia/Norway/Denmark DTV (MPEG2/4,DVB-S): 31 countries Albania/Austria/Belgium/Bosnia/Bulgaria/Croatia/Czech/Estonia/France/Germany/Greece/Hungary/Ireland/Italy/Kazakhstan/Latvia/Lithuania/Luxembourg/Morocco/Netherlands/Poland/Portugal/Romania/Russia/Serbia/Slovenia/Spain/Slovakia/Switzerland/Turkey/Ukraine Analog Only - 5 countries (Bosnia/Serbia/Bulgaria/Albania/Kazakhstan) Supported satellite : 22 satellites HISPASAT 1C/1D, ATLANTIC BIRD 2, NILESAT 101/102, ATLANTIC BIRD 3, AMOS 2/3, THOR 5/6, IRIUS 4, EUTELSAT-W3A, EUROBIRD 9A, EUTELSAT-W2A, HOTBIRD 6/8/9, EUTELSAT-SESAT, ASTRA 1L/H/M/KR, ASTRA 3A/3B, BADR 4/6, ASTRA 2D, EUROBIRD 3, EUTELSAT-W7, HELASSAT 2, EXPRESS AM1, TURKSAT 2A/3A, INTERSAT10
2	Broadcasting system	1) PAL-BG 2) PAL-DK 3) PAL-I/I' 4) SECAM L/L', DK, BG, I 5) DVB-T 6) DVB-C 7) DVB-T2 8) DVB-S	DVB-S :Satellite

No.	Item	Specification	Remarks
3	Receiving system	Analog : Upper Heterodyne Digital : COFDM , QAM	<p>► DVB-T</p> <ul style="list-style-type: none"> - Guard Interval(Bitrate_Mbit/s) 1/4, 1/8, 1/16, 1/32 - Modulation : Code Rate QPSK : 1/2, 2/3, 3/4, 5/6, 7/8 16-QAM : 1/2, 2/3, 3/4, 5/6, 7/8 64-QAM : 1/2, 2/3, 3/4, 5/6, 7/8 <p>► DVB-T2</p> <ul style="list-style-type: none"> - Guard Interval(Bitrate_Mbit/s) 1/4, 1/8, 1/16, 1/32, 1/128, 19/128, 19/256, - Modulation : Code Rate QPSK : 1/2, 2/5, 2/3, 3/4, 5/6 16-QAM : 1/2, 2/5, 2/3, 3/4, 5/6 64-QAM : 1/2, 2/5, 2/3, 3/4, 5/6 256-QAM : 1/2, 2/5, 2/3, 3/4, 5/6 <p>► DVB-C</p> <ul style="list-style-type: none"> - Symbolrate : 4.0Msymbols/s to 7.2Msymbols/s - Modulation : 16QAM, 64-QAM, 128-QAM and 256-QAM <p>► DVB-S</p> <ul style="list-style-type: none"> - Symbolrate DVB-S2 (8PSK/ QPSK) : 2 ~ 45 Msymbol/s DVB-S (QPSK) : 2~ 45 Msymbol/s -viterbi DVB-S mode : 1/2, 2/3, 3/4, 5/6, 7/8 DVB-S2 mode : 1/2, 2/3, 3/4, 5/6, 7/8, 8/9, 9/10
4	Scart Gender Jack(1EA)	PAL, SECAM	Scart Jack is Full scart and support MNT/DTV-OUT, DTV Recording(not support DTV Auto AV)
5	Video Input RCA(2EA)	PAL, SECAM, NTSC	4System : PAL, SECAM, NTSC, PAL60 Rear 1EA, AV gender jack 1EA
6	Head phone out	Antenna, AV1, AV2, AV3, Component, RGB, HDMI1, HDMI2, HDMI3, HDMI4 USB	
7	Component Input(1EA)	Y/Cb/Cr, Y/Pb/Pr	Component Gender 1EA
8	RGB Input	RGB-PC	Analog(D-SUB 15PIN)
9	HDMI Input (4EA)	HDMI1-DTV/DVI HDMI2-DTV HDMI3-DTV HDMI4-DTV	PC(HDMI version 1.3) Support HDCP
10	Audio Input (4EA)	RGB/DVI Audio, Component, AV1, 2	L/R Input
11	SDPIF out (1EA)	SPDIF out	
12	USB (2EA)	EMF, DivX HD, For Service (download)	JPEG, MP3, DivX HD - USB current : max 500 mA - USB voltage : 4.75 V - 5.25 V
13	Wireless jack (1EA)	24V power & control	Voltage : 24 V, Power : max 8 W

5. Component Video Input (Y, Cb/Pb, Cr/Pr)

No.	Specification				Remark
	Resolution	H-freq(kHz)	V-freq(Hz)		
1.	720x480	15.73	60.00	SDTV,DVD 480i	
2.	720x480	15.63	59.94	SDTV,DVD 480i	
3.	720x480	31.47	59.94	480p	
4.	720x480	31.50	60.00	480p	
5.	720x576	15.625	50.00	SDTV,DVD 625 Line	
6.	720x576	31.25	50.00	HDTV 576p	
7.	1280x720	45.00	50.00	HDTV 720p	
8.	1280x720	44.96	59.94	HDTV 720p	
9.	1280x720	45.00	60.00	HDTV 720p	
10.	1920x1080	31.25	50.00	HDTV 1080i	
11.	1920x1080	33.75	60.00	HDTV 1080i	
12.	1920x1080	33.72	59.94	HDTV 1080i	
13.	1920x1080	56.250	50	HDTV 1080p	
14.	1920x1080	67.5	60	HDTV 1080p	

6. RGB (PC)

No.	Specification				Proposed	Remarks
	Resolution	H-freq(kHz)	V-freq(Hz)	Pixel Clock(MHz)		
1.	720*400	31.468	70.08	28.321		For only DOS mode
2.	640*480	31.469	59.94	25.17	VESA	Input 848*480 60 Hz, 852*480 60 Hz -> 640*480 60 Hz Display
3.	800*600	37.879	60.31	40.00	VESA	
4.	1024*768	48.363	60.00	65.00	VESA(XGA)	
5.	1360*768	47.72	59.8	84.75	WXGA	
6.	1920*1080	66.587	59.93	138.625	WUXGA	FHD model

7. HDMI Input

(1) DTV Mode

No.	Resolution	H-freq(kHz)	V-freq.(Hz)	Pixel clock(MHz)	Proposed	Remark
1.	720*480	31.469 /31.5	59.94 /60	27.00/27.03	SDTV 480P	
2.	720*576	31.25	50	54	SDTV 576P	
3.	1280*720	37.500	50	74.25	HDTV 720P	
4.	1280*720	44.96 /45	59.94 /60	74.17/74.25	HDTV 720P	
5.	1920*1080	33.72 /33.75	59.94 /60	74.17/74.25	HDTV 1080I	
6.	1920*1080	28.125	50.00	74.25	HDTV 1080I	
7.	1920*1080	26.97 /27	23.97 /24	74.17/74.25	HDTV 1080P	
8.	1920*1080	33.716 /33.75	29.976 /30.00	74.25	HDTV 1080P	
9.	1920*1080	56.250	50	148.5	HDTV 1080P	
10.	1920*1080	67.43 /67.5	59.94 /60	148.35/148.50	HDTV 1080P	

(2) PC Mode

No.	Resolution	H-freq(kHz)	V-freq.(Hz)	Pixel clock(MHz)	Proposed	Remark
1.	720*400	31.468	70.08	28.321		HDCP
2.	640*480	31.469	59.94	25.17	VESA	HDCP
3.	800*600	37.879	60.31	40.00	VESA	HDCP
4.	1024*768	48.363	60.00	65.00	VESA(XGA)	HDCP
5.	1360*768	47.72	59.8	84.75	WXGA	HDCP
6.	1280*1024	63.595	60.0	108.875	SXGA	HDCP/FHD model
7.	1920*1080	67.5	60.00	138.625	WUXGA	HDCP/FHD model

8. 3D Mode

(1) HDMI Input (1.4a)

No.	Resolution	H-freq(kHz)	V-freq.(Hz)	Pixel clock(MHz)	Proposed	3D input proposed mode
1	1920*1080	53.95 / 54	23.98 / 24	148.35/148.5	HDTV 1080P	Frame packing
2	1280*720	89.9 / 90	59.94/60	148.35/148.5	HDTV 720P	Frame packing
3	1280*720	75	50	148.5	HDTV 720P	Frame packing
4	1920*1080	67.5	60	148.5	HDTV 1080P	Side by Side(half), Top and bottom
5	1920*1080	56.3	50	148.5	HDTV 1080P	Side by Side(half), Top and bottom
6	1280*720	45	60	74.25	HDTV 720P	Side by Side(half), Top and Bottom
7	1280*720	37.5	50	74.25	HDTV 720P	Side by Side(half), Top and Bottom
8	1920*1080	33.7	60	74.25	HDTV 1080i	Side by Side(half), Top and Bottom
9	1920*1080	28.1	50	74.25	HDTV 1080i	Side by Side(half), Top and Bottom
10	1920*1080	27	24	74.25	HDTV 1080P	Side by Side(half), Top and Bottom
11	1920*1080	33.7	30	89.1	HDTV 1080P	Side by Side(half), Top and Bottom

(2) HDMI Input (1.3)

No.	Resolution	H-freq(kHz)	V-freq.(Hz)	Pixel clock(MHz)	Proposed	3D input proposed mode
1	1280*720	45.00	60.00	74.25	HDTV 720P	Side by Side, Top & Bottom
2	1280*720	37.500	50	74.25	HDTV 720P	Side by Side, Top & Bottom
3	1920*1080	33.75	60.00	74.25	HDTV 1080I	Side by Side, Top & Bottom
4	1920*1080	28.125	50.00	74.25	HDTV 1080I	Side by Side, Top & Bottom
5	1920*1080	27.00	24.00	74.25	HDTV 1080P	Side by Side, Top & Bottom, Checkerboard
6	1920*1080	33.75	30.00	74.25	HDTV 1080P	Side by Side, Top & Bottom, Checkerboard
7	1920*1080	67.50	60.00	148.5	HDTV 1080P	Side by Side, Top & Bottom, Checkerboard, Single Frame Sequential
8	1920*1080	56.250	50	148.5	HDTV 1080P	Side by Side, Top & Bottom, Checkerboard, Single Frame Sequential

(3) RF 3D Input(DTV)

No.	Resolution	H-freq(kHz)	V-freq.(Hz)	Pixel clock(MHz)	Proposed	3D input proposed mode
1	1280*720	37.500	50	74.25	HDTV 720P	Side by Side, Top & Bottom
2	1920*1080	28.125	50	74.25	HDTV 1080I	Side by Side, Top & Bottom

(4) USB Input

No.	Resolution	H-freq(kHz)	V-freq.(Hz)	Pixel clock(MHz)	3D input proposed mode	Proposed
1	1920*1080	33.75	30.000	74.25	Side by Side Top & Bottom Checkerboard	HDTV 1080P






(5) RGB-PC Input

No.	Resolution	H-freq(kHz)	V-freq.(Hz)	Pixel clock(MHz)	Proposed	3D input proposed mode
1	1920*1080	67.5	60	148.5	HDTV 1080P	Side by Side, Top & Bottom


(6) DLNA

No.	Resolution	H-freq(kHz)	V-freq.(Hz)	Pixel clock(MHz)	Proposed	3D input proposed mode
1	1920*1080	33.75	30		HDTV 1080P	Side by Side, Top & Bottom, Checkerboard

(7) 3D Input mode

No.	Side by Side	Top & Bottom	Checkerboard	Single Frame Sequential	Frame Packing
1.					


- 2) MAC Address Download
 - Com 1,2,3,4 and 115200(Baud rate)
 - Port connection button click(1)

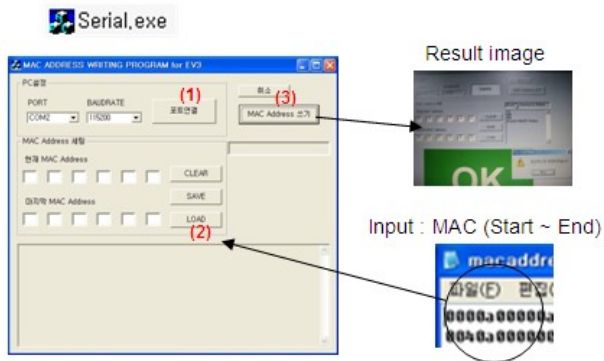


- Load button click(2) for MAC Address write.
- Start MAC Address write button(3).
- Check the OK Or NG.

3.3. LAN Inspection

- (1) Equipment & Condition
 - Each other connection to LAN Port of IP Hub and Jig

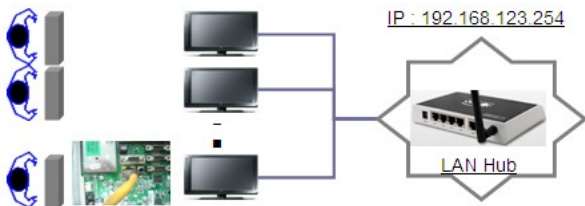

- (2) LAN inspection solution
 - LAN Port connection with PCB
 - Network setting at MENU Mode of TV
 - setting automatic IP
 - Setting state confirmation
 - > If automatic setting is finished, you confirm IP and MAC Address.

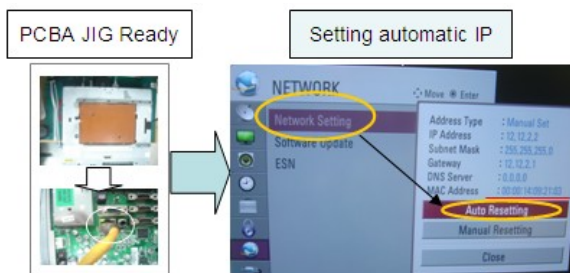


3.4. LAN PORT INSPECTION(PING TEST)

Connect SET -> LAN port == PC -> LAN Port




- (1) Equipment setting
 - 1) Play the LAN Port Test PROGRAM.
 - 2) Input IP set up for an inspection to Test Program.
*IP Number : 12.12.2.2
- (2) LAN PORT inspection (PING TEST)
 - 1) Play the LAN Port Test Program.
 - 2) Connect each other LAN Port Jack.
 - 3) Play Test (F9) button and confirm OK Message.
 - 4) Remove LAN CABLE.

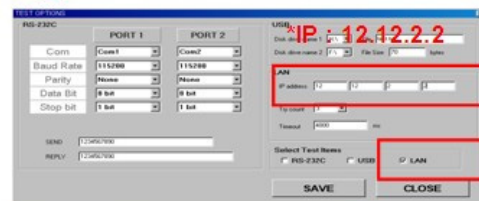

3.5. Model name & Serial number Download

- (1) Model name & Serial number D/L
 - Press "Power on" key of service remote control.(Baud rate : 115200 bps)
 - Connect RS232 Signal Cable to RS-232 Jack.
 - Write Serial number by use RS-232.
 - Must check the serial number at Instart menu.
- (2) Method & notice
 - A. Serial number D/L is using of scan equipment.
 - B. Setting of scan equipment operated by Manufacturing Technology Group.
 - C. Serial number D/L must be conformed when it is produced in production line, because serial number D/L is mandatory by D-book 4.0

- * Manual Download (Model Name and Serial Number)
If the TV set is downloaded by OTA or service man, sometimes model name or serial number is initialized.(Not always)
There is impossible to download by bar code scan, so It need Manual download.
- Press the 'instart' key on Adjustment remote control.
 - Go to the menu '5.Model Number D/L' like below photo.
 - Input the Factory model name(ex 42LW950-ZA) or Serial number like photo.

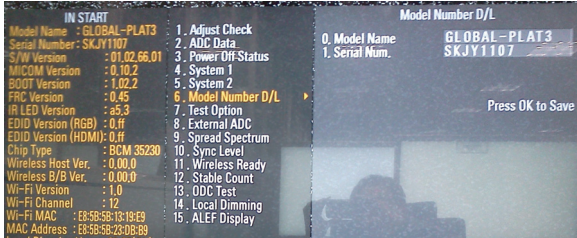

- Check the model name Instart menu. -> Factory name displayed (ex 42LW750S-ZA)
- Check the Diagnostics. (DTV country only) -> Buyer model displayed (ex 42LW750S-ZA)

3.6. CI+ Key Download method

3.6.1. Download Procedure

- Press "Power on" key of a Service remote control.
(Baud rate : 115200 bps)
- Connect RS232-C Signal Cable.
- Write CI+ Key through RS-232-C.
- Check whether the key was downloaded or not at 'In Start' menu. (Refer to below).



=> Check the Download to CI+ Key value in LGset.

3.6.2. Check the method of CI+ Key value.

- Check the method on Instart menu.
- Check the method of RS232C Command.

1) Into the main ass'y mode (RS232 : aa 00 00)

CMD 1	CMD 2	Data 0
A	A	0 0

2) Check the key download for transmitted command.
(RS232 : ci 00 10)

CMD 1	CMD 2	Data 0
C	I	1 0

3) Result value

- normally status for download : OKx
- abnormally status for download : NGx

3.6.3. Check the method of CI+ Key value. (RS232)

1) into the main ass'y mode (RS232 : aa 00 00)

CMD 1	CMD 2	Data 0
A	A	0 0

2) Check the method of CI+ key by command. (RS232 : ci 00 20)

CMD 1	CMD 2	Data 0
C	I	2 0


3) Result value

i 01 OK 1d1852d21c1ed5dcx
→ CI+ key Value

3.7. Widevine Key Download method

3.7.1. Widevine key Download

- Press "Power on" key of a Service remote control.
(Baud rate : 115200 bps)
- Connect RS232-C Signal Cable.
- Write Widevine Key through RS-232-C.
- Check whether the key was downloaded or not at 'In Start' menu. (Refer to below)

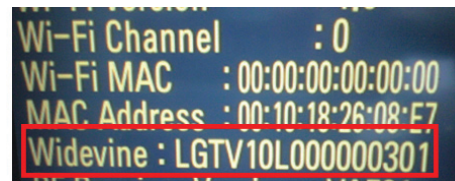

=> Check the Download to Widevine Key value in LGset.

3.7.2. Check the method of Widevine Key value.

- Check the method on Instart menu.
- Check the method of RS232C Command.

1) into the main ass'y mode (RS232 : aa 00 00)

CMD 1	CMD 2	Data 0
A	A	0 0

2) Check the key download for transmitted command.
(RS232 : ci 00 10)

CMD 1	CMD 2	Data 0
C	I	1 0

3) Result value

- normally status for download : OKx
- abnormally status for download : NGx

3.7.3. Check the method of Widevine key value (RS232)

1) Into the main assembly mode (RS232 : aa 00 00)

CMD 1	CMD 2	Data 0
A	A	0 0

2) Check the method of Widevine key by command.
(RS232 : ci 00 20)


CMD 1	CMD 2	Data 0
C	I	2 0

3) Result value


i 01 OK 1d1852d21c1ed5dcx
→ Widevine key Value

3.8. Mac+Widevine+GP3 BCM CI+ download

3.8.1. Connect: PCBA Jig-> RS-232C Port== PC-> RS-232C Port

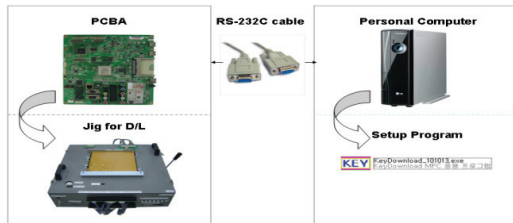

3.8.2. MAC Address, CI Plus key and Widevine key write.
11Y LCD TV + MAC + Widevine + GP3_BCM CI Plus

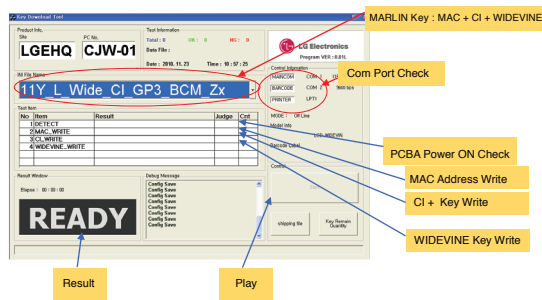

- (1) Equipment setting
 - Play file: keydownload.exe
 - Select the download items.(MARLIN)
- (2) Communication Prot connection
 - Key Write :Com 1,2,3,4 and 115200(Baudrate)
 - Barcode : Com 1,2,3,4 and 9600(Baudrate)
- (3) Mode check: Online Only
- (4) Check the test process: DETECT -> MAC -> CI -> WIDEVINE
- (5) Play: START
- (6) Result: Ready, Test, OK or NG

3.9. LNB voltage and 22KHz tone check

- only for DVB-S/S2 model

- (1) Test method
 - 1) Press "Power on" key of a service remote control.
(Baud rate : 115200 bps)
 - 2) Connect cable between satellite ANT and test JIG.
 - 3). Connect RS232-C Signal Cable.
 - 4) Write LNB ON control command through RS-232-C.
 - 5) check LED light 'ON' at 18V menu.
 - 6) check LED light 'ON' at 22KHz tone menu.
 - 7) Write LNB OFF control command through RS-232-C.
 - 8) check LED light 'OFF' at 18V menu.
 - 9) check LED light 'OFF' at 22KHz tone menu.

(2) RS-232 command for test LNB

	Command	Set ACK
LNB On	[A][I][] [Set ID][] [30][Cr]	[O][K][x] or NG : [N][G][x]
LNB Off	[A][I][] [Set ID][] [40][Cr]	[O][K][x] or NG : [N][G][x]

- (3) Test result
 - After send LNB On command, '18V LED' and '22KHz tone LED' should be ON.
 - After send LNB OFF command, '18V LED' and '22KHz tone LED' should be OFF.

4. Manual Adjustment


4.1. ADC(GP3) Adjustment

4.1.1. Overview

ADC adjustment is needed to find the optimum black level and gain in Analog-to-Digital device and to compensate RGB deviation.

4.1.2. Equipment & Condition

- (1) Adjust Remote control
- (2) 801GF(802B, 802F, 802R) or MSPG925FA Pattern Generator
 - Resolution :
 - 480i, 720*480(MSPG-925FA->Model:209, Pattern:65)-480i
 - 1080p, 1920*1080(MSPG-925FA->Model:225, Pattern:65)-1080p
 - Pattern : Horizontal 100 % Color Bar Pattern
 - Pattern level: 0.7 ± 0.1 Vp-p
 - Image



(3) Must use standard cable

4.1.3. Adjust method

* If Adjust ADC is "OTP", It doesn't need ADC adjustment.
(GP3-BM)

- (1) ADC 480i, 1080p Comp1
 - 1) Check connected condition of Component 1 cable to the equipment.
 - 2) Give a 480i, 1080p Mode, Horizontal 100% Color Bar Pattern to Component 1.
(MSPG-925FA -> Model: 209, Pattern: 65) - 480i
(MSPG-925FA -> Model: 225, Pattern: 65) - 1080p
 - 3) Change input mode as Component 1 and picture mode as "Standard"
 - 4) Press the In-start Key on the Adjustment remote control after at least 1 min of signal reception. Then, select 7. External ADC -> 1. COMP 1080p on the menu. Press Enter key. The adjustment will start automatically.
 - 5) If ADC calibration is successful, "ADC RGB Success" is displayed.
If ADC calibration is failure, "ADC RGB Fail" is displayed.
 - 6) If ADC calibration is failure, after recheck ADC pattern or condition retry calibration Error message refer to 5).
- (2) ADC 1920*1080 RGB
 - 1) Check connected condition of Component & RGB cable to the equipment
 - 2) Give a 1920*1080 Mode, 100 % Horizontal Color Bar Pattern to RGB port.
(MSPG-925 Series -> model: 225 , pattern: 65)
 - 3) Change input mode as RGB and picture mode as "Standard".
 - 4) Press the In-start key on the Adjustment remote control after at least 1 min of signal reception. Then, select 7. External ADC -> 1. COMP 1080p on the menu. Press Enter key. The adjustment will start automatically.
 - 5) If ADC calibration is successful, "ADC RGB Success" is displayed.
If ADC calibration is failure, "ADC RGB Fail" is displayed.
 - 6) If ADC calibration is failure, after recheck ADC pattern or condition retry calibration Error message refer to 5).

4.2. EDID(The Extended Display Identification Data)/DDC(Display Data Channel) download

(1) Overview


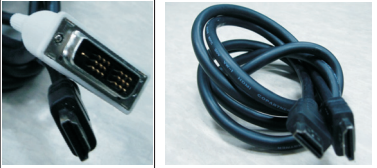
It is a VESA regulation. A PC or a MNT will display an optimal resolution through information sharing without any necessity of user input. It is a realization of "Plug and Play".

(2) Equipment

- Adjustment remote control
- Since embedded EDID data is used, EDID download JIG, HDMI cable and D-sub cable are not need.

(3) Download method

- 1) Press Adj. key on the Adj. R/C, then select "10.EDID D/L", By pressing Enter key, enter EDID D/L menu.
- 2) Select [Start] key by pressing Enter key, HDMI1/ HDMI2/ HDMI3/ RGB are Writing and display OK or NG.

For Analog EDID	For HDMI EDID
D-sub to D-sub	DVI-D to HDMI or HDMI to HDMI
	

(4) EDID DATA_3D

■ HDMI

	0x00	0x01	0x02	0x03	0x04	0x05	0x06	0x07	0x08	0x09	0x0A	0x0B	0x0C	0x0D	0x0E	0x0F
0x00	0	FF	FF	FF	FF	FF	FF	0	1E	6D						
0x01			1	3	80	10	9	78	0A	EE	91	A3	54	4C	99	26
0x02	0F	50	54	A1	8	0	71	40	81	C0	81	0	81	80	95	0
0x03	90	40	A9	C0	B3	0	2	3A	80	18	71	38	2D	40	58	2C
0x04	45	0	A0	5A	0	0	0	1E	66	21	50	B0	51	0	1B	30
0x05	40	70	36	0	A0	5A	0	0	0	1E	0	0	0	FD	0	39
0x06	3F	1F	52	10	0	0A	20	20	20	20	20	20				
0x07															1	1
0x00	2	3	37	F1	4E	10	1F	84	13	5	14	3	2	12	20	21
0x01	22	15	1	26	15	7	50	9	57	7						
0x02				E3	5	3	1	1	1D	80	18	71	1C	16	20	58
0x03																
0x04	2C	25	0	A0	5A	0	0	0	9E	1	1D	0	80	51	D0	1A
0x05	20	6E	88	55	0	A0	5A	0	0	0	1A	2	3A	80	18	71
0x06	38	2D	40	58	2C	45	0	A0	5A	0	0	0	1E	0	0	0
0x07	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	2

■ RGB

	0x00	0x01	0x02	0x03	0x04	0x05	0x06	0x07	0x08	0x09	0x0A	0x0B	0x0C	0x0D	0x0E	0x0F
0x00	0	FF	FF	FF	FF	FF	FF	0	1E	6D						
0x01			1	3	68	10	9	78	0A	EE	91	A3	54	4C	99	26
0x02	0F	50	54	A1	8	0	71	40	81	C0	81	0	81	80	95	0
0x03	90	40	A9	C0	B3	0	2	3A	80	18	71	38	2D	40	58	2C
0x04	45	0	A0	5A	0	0	0	1E	66	21	50	B0	51	0	1B	30
0x05	40	70	36	0	A0	5A	0	0	0	1E	0	0	0	FD	0	3A
0x06	3E	1E	53	10	0	0A	20	20	20	20	20	20				
0x07															0	3

(5) EDID DATA_2D

■ HDMI

	0x00	0x01	0x02	0x03	0x04	0x05	0x06	0x07	0x08	0x09	0x0A	0x0B	0x0C	0x0D	0x0E	0x0F
0x00	0	FF	FF	FF	FF	FF	FF	0	1E	6D						
0x01			1	3	80	10	9	78	0A	EE	91	A3	54	4C	99	26
0x02	0F	50	54	A1	8	0	71	40	81	C0	81	0	81	80	95	0
0x03	90	40	A9	C0	B3	0	2	3A	80	18	71	38	2D	40	58	2C
0x04	45	0	A0	5A	0	0	0	1E	66	21	50	B0	51	0	1B	30
0x05	40	70	36	0	A0	5A	0	0	0	1E	0	0	0	FD	0	39
0x06	3F	1F	52	10	0	0A	20	20	20	20	20	20				
0x07															1	1
0x00	2	3	26	F1	4E	10	1F	84	13	5	14	3	2	12	20	21
0x01	22	15	1	26	15	7	50	9	57	7	67					
0x02				E3	5	3	1	1	1D	80	18	71	1C	16	20	58
0x03	25	0	A0	5A	0	0	0	9E	1	1D	0	80	51	D0	1A	20
0x04	6E	88	55	0	A0	5A	0	0	0	1A	2	3A	80	18	71	38
0x05	2D	40	58	2C	45	0	A0	5A	0	0	0	1E	66	21	50	B0
0x06	51	0	1B	30	40	70	36	0	A0	5A	0	0	0	1E	0	0
0x07	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	2

■ RGB

	0x00	0x01	0x02	0x03	0x04	0x05	0x06	0x07	0x08	0x09	0x0A	0x0B	0x0C	0x0D	0x0E	0x0F
0x00	0	FF	FF	FF	FF	FF	FF	0	1E	6D						
0x01			1	3	68	10	9	78	0A	EE	91	A3	54	4C	99	26
0x02	0F	50	54	A1	8	0	71	40	81	C0	81	0	81	80	95	0
0x03	90	40	A9	C0	B3	0	2	3A	80	18	71	38	2D	40	58	2C
0x04	45	0	A0	5A	0	0	0	1E	66	21	50	B0	51	0	1B	30
0x05	40	70	36	0	A0	5A	0	0	0	1E	0	0	0	0	FD	0
0x06	3E	1E	53	10	0	0A	20	20	20	20	20	20				
0x07															0	3

■ Reference

- HDMI1 ~ HDMI4 / RGB

- In the data of EDID, bellows may be different by S/W or Input mode.

Product ID

Model Name	HEX	EDID Table	DDC Function
ALL	0001	0100	Analog
	0001	0100	Digital

Serial No. : Controlled on product line

Month, Year: Controlled on production line:

ex) Monthly : '01' -> '01'

Year : '2010' -> '14'

Model Name(Hex):

MODEL	MODEL NAME(HEX)
all	00 00 00 FC 00 4C 47 20 54 56 0A 20 20 20 20 20 20 20

Checksum: Changeable by total EDID data._3D

INPUT	1	2	3
HDMI1	7F	CB	X
HDMI2	7F	BB	X
HDMI3	7F	AB	X
HDMI4	7F	9B	X
RGB	X	X	98

Checksum: Changeable by total EDID data._2D

INPUT	1	2	3
HDMI1	7F	D9	X
HDMI2	7F	C9	X
HDMI3	7F	B9	X
HDMI4	7F	A9	X
RGB	X	X	98

Vendor Specific(HDMI)_3D

INPUT	MODEL NAME(HEX)
HDMI1	78 03 0C 00 10 00 B8 2D 20 C0 0E 01 40 0A 3C 08 10 18 10 98 10 58 10 38 10
HDMI2	78 03 0C 00 20 00 B8 2D 20 C0 0E 01 40 0A 3C 08 10 18 10 98 10 58 10 38 10
HDMI3	78 03 0C 00 30 00 B8 2D 20 C0 0E 01 40 0A 3C 08 10 18 10 98 10 58 10 38 10
HDMI4	78 03 0C 00 40 00 B8 2D 20 C0 0E 01 40 0A 3C 08 10 18 10 98 10 58 10 38 10

Vendor Specific(HDMI)_2D

INPUT	MODEL NAME(HEX)
HDMI1	67 03 0C 00 10 00 B8 2D
HDMI2	67 03 0C 00 20 00 B8 2D
HDMI3	67 03 0C 00 30 00 B8 2D
HDMI4	67 03 0C 00 40 00 B8 2D

4.3. White Balance Adjustment

4.3.1. Overview

- (1) W/B adj. Objective & How-it-works
- (2) Objective: To reduce each Panel's W/B deviation
- (3) How-it-works : When R/G/B gain in the OSD is at 192, it means the panel is at its Full Dynamic Range. In order to prevent saturation of Full Dynamic range and data, one of R/G/B is fixed at 192, and the other two is lowered to find the desired value.


- (4) Adj. condition : normal temperature

- 1) Surrounding Temperature : 25 °C ± 5 °C
- 2) Warm-up time: About 5 Min
- 3) Surrounding Humidity : 20 % ~ 80 %

* Before White balance adjustment, Keep power on status. don't power off.

* ALEF Header(Module with T-con) supplied as SKD has White Balance data. (White balance data is stored in EEPROM of the T-con Board)

It doesn't need to adjust White balance if "3. Adjust White Balance" is OK as figure below.

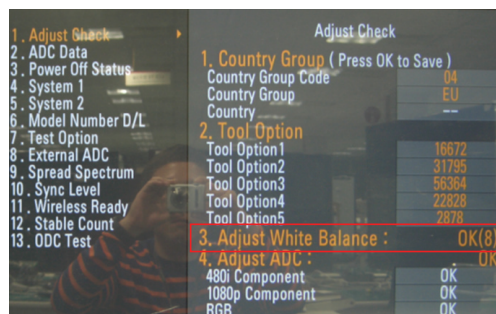


4.3.2. Equipment

- 1) Color Analyzer: CA-210 (LED Module : CH 14)
- 2) Adj. Computer(During auto adj., RS-232C protocol is needed)
- 3) Adjust Remote control
- 4) Video Signal Generator MSPG-925F 720p/216-Gray (Model:204, Pattern:80IRE)
-> Only when internal pattern is not available

■ Color Analyzer Matrix should be calibrated using CS-1000

4.3.3. Equipment connection MAP

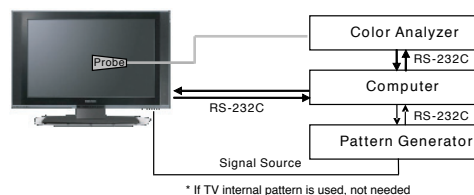

4.3.4. Adj. Command (Protocol)

<Command Format>

[START] [6E] [A] [50] [A] [LEN] [A] [03] [A] [CMD] [A] [00] [A] [VAL] [A] [CS] [A] [STOP]

- LEN: Number of Data Byte to be sent
 - CMD: Command
 - VAL: FOS Data value
 - CS: Checksum of sent data
 - A: Acknowledge
- Ex) [Send: JA_00_DD] / [Ack: A_00_okDDX]

■ RS-232C Command used during auto-adj.

RS-232C COMMAND [CMD ID DATA]			Explanation
wb	00	00	Begin White Balance adj.
wb	00	10	Gain adj.(internal white pattern)
wb	00	1f	Gain adj. completed
wb	00	20	Offset adj.(internal white pattern)
wb	00	2f	Offset adj. completed
wb	00	ff	End White Balance adj.(Internal pattern disappears)

Ex) wb 00 00 -> Begin white balance auto-adj.
wb 00 10 -> Gain adj.
ja 00 ff -> Adj. data
jb 00 c0

...

...

wb 00 1f -> Gain adj. completed

*(wb 00 20(Start), wb 00 2f(completed)) -> Off-set adj.
wb 00 ff -> End white balance auto-adj.

■ Adj. Map

	ITEM	Command		Data Range(Hex.)		Default(Decimal)
		Cmd 1	Cmd 2	Min	Max	
Cool	R-Gain	j	g	00	C0	
	G-Gain	j	h	00	C0	
	B-Gain	j	i	00	C0	
	R-Cut					
	G-Cut					
Medium	R-Gain	j	a	00	C0	
	G-Gain	j	b	00	C0	
	B-Gain	j	c	00	C0	
	R-Cut					
	G-Cut					
Warm	R-Gain	j	d	00	C0	
	G-Gain	j	e	00	C0	
	B-Gain	j	f	00	C0	
	R-Cut					
	G-Cut					

4.3.5. Adjustment method

(1) Auto adjustment method

- 1) Set TV in adj. mode using POWER ON key.
- 2) Zero calibrate probe then place it on the center of the Display.
- 3) Connect Cable (RS-232C)
- 4) Select mode in adj. Program and begin adjustment.
- 5) When adjustment is complete (OK Sign), check adjustment status pre mode. (Warm, Medium, Cool)
- 6) Remove probe and RS-232C cable to complete adj.

■ W/B Adj. must begin as start command "wb 00 00", and finish as end command "wb 00 ff", and Adj. offset if need.

(2) Manual adjustment method

- 1) Set TV in Adjustment mode using POWER ON
- 2) Zero Calibrate the probe of Color Analyzer, then place it on the center of LCD module within 10 cm of the surface.
- 3) Press ADJ key -> EZ adjust using adjustment R/C -> 7. White-Balance then press the cursor to the right key(▶). (When key(▶) is pressed 216 Gray internal pattern will be displayed)
- 4) One of R Gain / G Gain / B Gain should be fixed at 192, and the rest will be lowered to meet the desired value.
- 5) Adj. is performed in COOL, MEDIUM, WARM 3 modes of color temperature.

■ If internal pattern is not available, use RF input. In EZ Adj. menu 7.White Balance, you can select one of 2 Test-pattern: ON, OFF. Default is inner(ON). By selecting OFF, you can adjust using RF signal in 216 Gray pattern.

■ Adj. condition and cautionary items

- 1) Lighting condition in surrounding area
Surrounding lighting should be lower 10 lux. Try to isolate adj. area into dark surrounding.
- 2) Probe location : Color Analyzer(CA-210) probe should be within 10 cm and perpendicular of the module surface (80° ~ 100°)
- 3) Aging time
 - After Aging Start, Keep the Power ON status during 5 Minutes.
 - In case of LCD, Back-light on should be checked using no signal or Full-white pattern.

4.3.6. Reference(White Balance Adj. coordinate and temperature)

■ Luminance : 204 Gray

■ Standard color coordinate and temperature using CS-1000 (over 26 inch)

Mode	Color Coordination		Temp	ΔUV
	x	y		
COOL	0.269	0.273	13000 K	0.0000
MEDIUM	0.285	0.293	9300 K	0.0000
WARM	0.313	0.329	6500 K	0.0000

■ Standard color coordinate and temperature using CA-210 (CH 14)

Mode	Color Coordination		Temp	ΔUV
	x	y		
COOL	0.269 ± 0.002	0.273 ± 0.002	13000 K	0.0000
MEDIUM	0.285 ± 0.002	0.293 ± 0.002	9300 K	0.0000
WARM	0.313 ± 0.002	0.329 ± 0.002	6500 K	0.0000

4.3.7. White balance table

■ Module change color coordinate because of aging time.

■ Apply under the color coordinate table, for compensated aging time.

GP2	Aging Time (Min.)	Cool		Medium		Warm	
		X	Y	X	Y	X	Y
		269	273	285	293	313	329
1	0-2	279	288	295	308	319	338
2	3-5	278	286	294	306	318	336
3	6-9	277	285	293	305	317	335
4	10-19	276	283	292	303	316	333
5	20-35	274	280	290	300	314	330
6	36-49	272	277	288	297	312	327
7	50-79	271	275	287	295	311	325
8	80-149	270	274	286	294	310	324
9	Over 150	269	273	285	293	309	323

4.4. Wireless function check

Step 1) Connect set and Dongle of Wireless to Cable of HDMI & TTA 20Pin.

Step 2) At OSD of SET, check the message like Fig.3.

Step 3) Detach Cable of Wireless Dongle.



Fig. 1
<Dongle>




Fig. 2
<Wireless Ready Set>

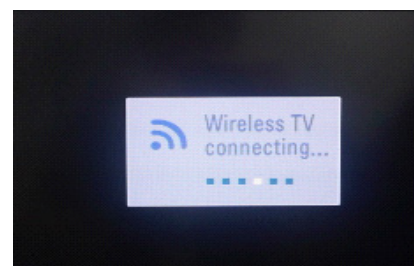


Fig. 3 Connect the Dongle
(Dongle Connection Display)


4.5. EYE-Q function check

- Step 1) Turn on TV.
- Step 2) Press EYE key of Adjustment remote control
- Step 3) Cover the Eye Q II sensor on the front of the using your hand and wait for 6 seconds
- Step 4) Confirm that R/G/B value is lower than 10 of the "Raw Data (Sensor data, Back light)". If after 6 seconds, R/G/B value is not lower than 10, replace Eye Q II sensor.
- Step 5) Remove your hand from the Eye Q II sensor and wait for 6 seconds.
- Step 6) Confirm that "OK" pop up. If change is not seen, replace Eye Q II sensor.



4.6. Local Dimming Function Check

- (1) Turn on TV.
- (2) At the Local Dimming mode, module Edge Backlight moving Top to Bottom Back light of IOP module moving.
- (3) Confirm the Local Dimming mode.
- (4) Press "Exit" key.

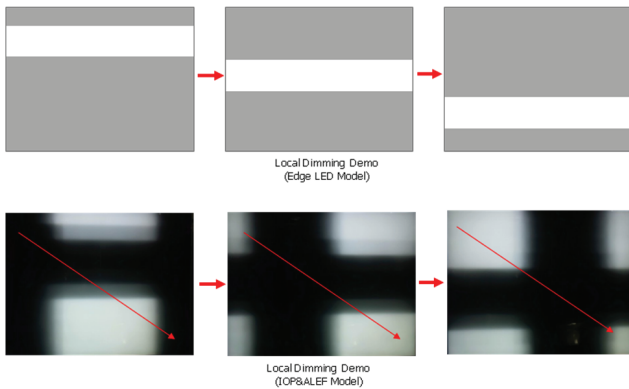

4.7. Magic Motion Remote control test

- Equipment : RF Remote control for test, IR-KEY-Code Remote control for test
- You must confirm the battery power of RF-Remote control before test.(recommend that change the battery per every lot)
- Sequence (test)
 - 1) if you select the 'start key(Mute)' on the controller, you can pairing with the TV SET.
 - 2) You can check the cursor on the TV Screen, when select the 'OK' key on the controller.
 - 3) You must remove the pairing with the TV Set by select 'Vol+(STOP)' key on the controller.

4.8. 3D function test

(Pattern Generator MSHG-600, MSPG-6100 [Support HDMI 1.4])

* HDMI mode No. 872, pattern No. 83)

- 1) Please input 3D test pattern like below.



- 2) When 3D OSD appear automatically, then select OK key.



- 3) Don't wear a 3D Glasses, Check the picture like below.



4.9. LNB voltage and 22 KHz tone check

(only for DVB-S/S2 model)

- (1) Test method

- 1) Set TV in Adj. mode using POWER ON.
- 2) Connect cable between satellite ANT and test JIG.
- 3) Press Yellow Key (ETC+SWAP) in Adjustment remote control to make LNB on.
- 4) check LED light 'ON' at 18V menu.
- 5) check LED light 'ON' at 22KHz tone menu.
- 6) Press Blue Key (ETC+PIP INPUT) in Adjustment remote control to make LNB off.
- 7) Check LED light 'OFF' at 18 V menu.
- 8) Check LED light 'OFF' at 22 KHz tone menu.

- (2) Test result

- After press LNB On key, '18 V LED' and '22 KHz tone LED' should be ON.
- After press LNB OFF key, '18 V LED' and '22 KHz tone LED' should be OFF.

4.10. Option selection per country

- (1) Overview
- Option selection is only done for models in Non-EU.
 - Applied model: LD12C/E Chassis applied EU model.

(2) Method

- 1) Press ADJ key on the Adjustment Remote Control, then select Country Group Menu.
- 2) Depending on destination, select Country Group Code 04 or Country Group EU then on the lower Country option, select US, CA, MX. Selection is done using +, - or ►◄ KEY.

4.11. Tool Option selection

- Method : Press Adj. key on the Adjustment remote controls, then select Tool option.

4.12. Ship-out mode check(In-stop)

After final inspection, press IN-STOP key of the Adjustment remote control and check that the unit goes to Stand-by mode.

5. GND and Internal Pressure check

5.1. Method

- 1) GND & Internal Pressure auto-check preparation
 - Check that Power Cord is fully inserted to the SET. (If loose, re-insert)
- 2) Perform GND & Internal Pressure auto-check
 - Unit fully inserted Power cord, Antenna cable and A/V arrive to the auto-check process.
 - Connect D-terminal to AV JACK TESTER
 - Auto CONTROLLER(GWS103-4) ON
 - Perform GND TEST
 - If NG, Buzzer will sound to inform the operator.
 - If OK, changeover to I/P check automatically. (Remove CORD, A/V form AV JACK BOX)
 - Perform I/P test
 - If NG, Buzzer will sound to inform the operator.
 - If OK, Good lamp will lit up and the stopper will allow the pallet to move on to next process.

5.2. Checkpoint

- TEST voltage
 - GND: 1.5 KV/min at 100 mA
 - SIGNAL: 3 KV/min at 100 mA
- TEST time: 1 second
- TEST POINT
 - GND TEST = POWER CORD GND & SIGNAL CABLE METAL GND
 - Internal Pressure TEST = POWER CORD GND & LIVE & NEUTRAL
- LEAKAGE CURRENT: At 0.5 mArms

6. Audio


No.	Item	Min.	Typ.	Max.	Unit	
1.	Audio practical max Output, L/R (Distortion=10 % max Output)	9	10	12	W	EQ Off AVL Off Clear Voice Off
			0.5		Vrms	
2.	Speaker (8 Ω Impedance)	9	10.0	12.0	W	EQ On AVL On Clear Voice On

Measurement condition:



1. RF input: Mono, 1 KHz sine wave signal, 100 % Modulation
2. CVBS, Component: 1 KHz sine wave signal 0.4 Vrms
3. RGB PC: 1 KHz sine wave signal 0.7 Vrms

7. USB S/W Download (option, Service only)

- 1) Put the USB Stick to the USB socket
- 2) Automatically detecting update file in USB Stick
 - If your downloaded program version in USB Stick is Low, it didn't work. But your downloaded version is High, USB data is automatically detecting
- 3) Show the message "Copying files from memory"

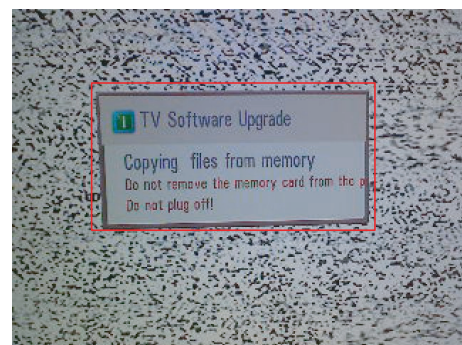

- 4) Updating is starting.

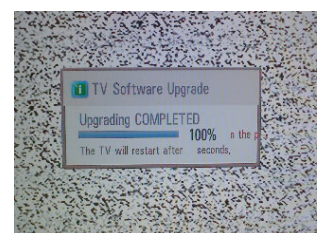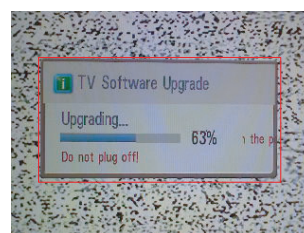

- 5) Updating Completed, The TV will restart automatically
- 6) If your TV is turned on, check your updated version and Tool option. (explain the Tool option, next stage)
 - * If downloading version is more high than your TV have, TV can lost all channel data. In this case, you have to channel recover. if all channel data is cleared, you didn't have a DTV/ATV test on production line.

* After downloading, have to adjust TOOL OPTION again.

- 1) Push "IN-START" key in service remote control.
- 2) Select "Tool Option 1" and Push "OK" button.
- 3) Punch in the number. (Each model has their number.)


DISASSEMBLY



Loosen 4 screws that bind Stand Assembly and set.



Disassemble 18 screws around the 4 edges of set after separation Stand Assembly.

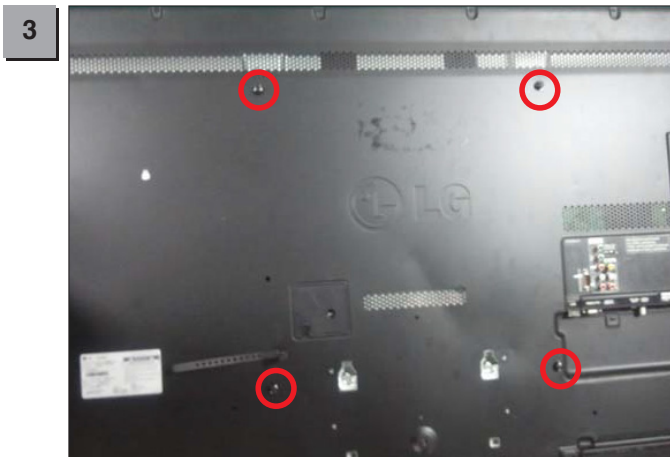

Disassemble 4 VESA screws.



Disassemble 3 screws that fix Side AV bracket and Back cover.



Disassemble 1 screw which bind Main Board and Back cover.



Detach Power cord Cover from the Back cover.

7



Push the latch to get Power cord out of the set.
Remove the Back cover.

8




Disconnect cables of Soft touch PCB, Motion PCB, Speaker from Main board.

9



Push the Panel aside and bend Cabinet back. Take the Panel out of Cabinet by detaching latch.


BLOCK DIAGRAM

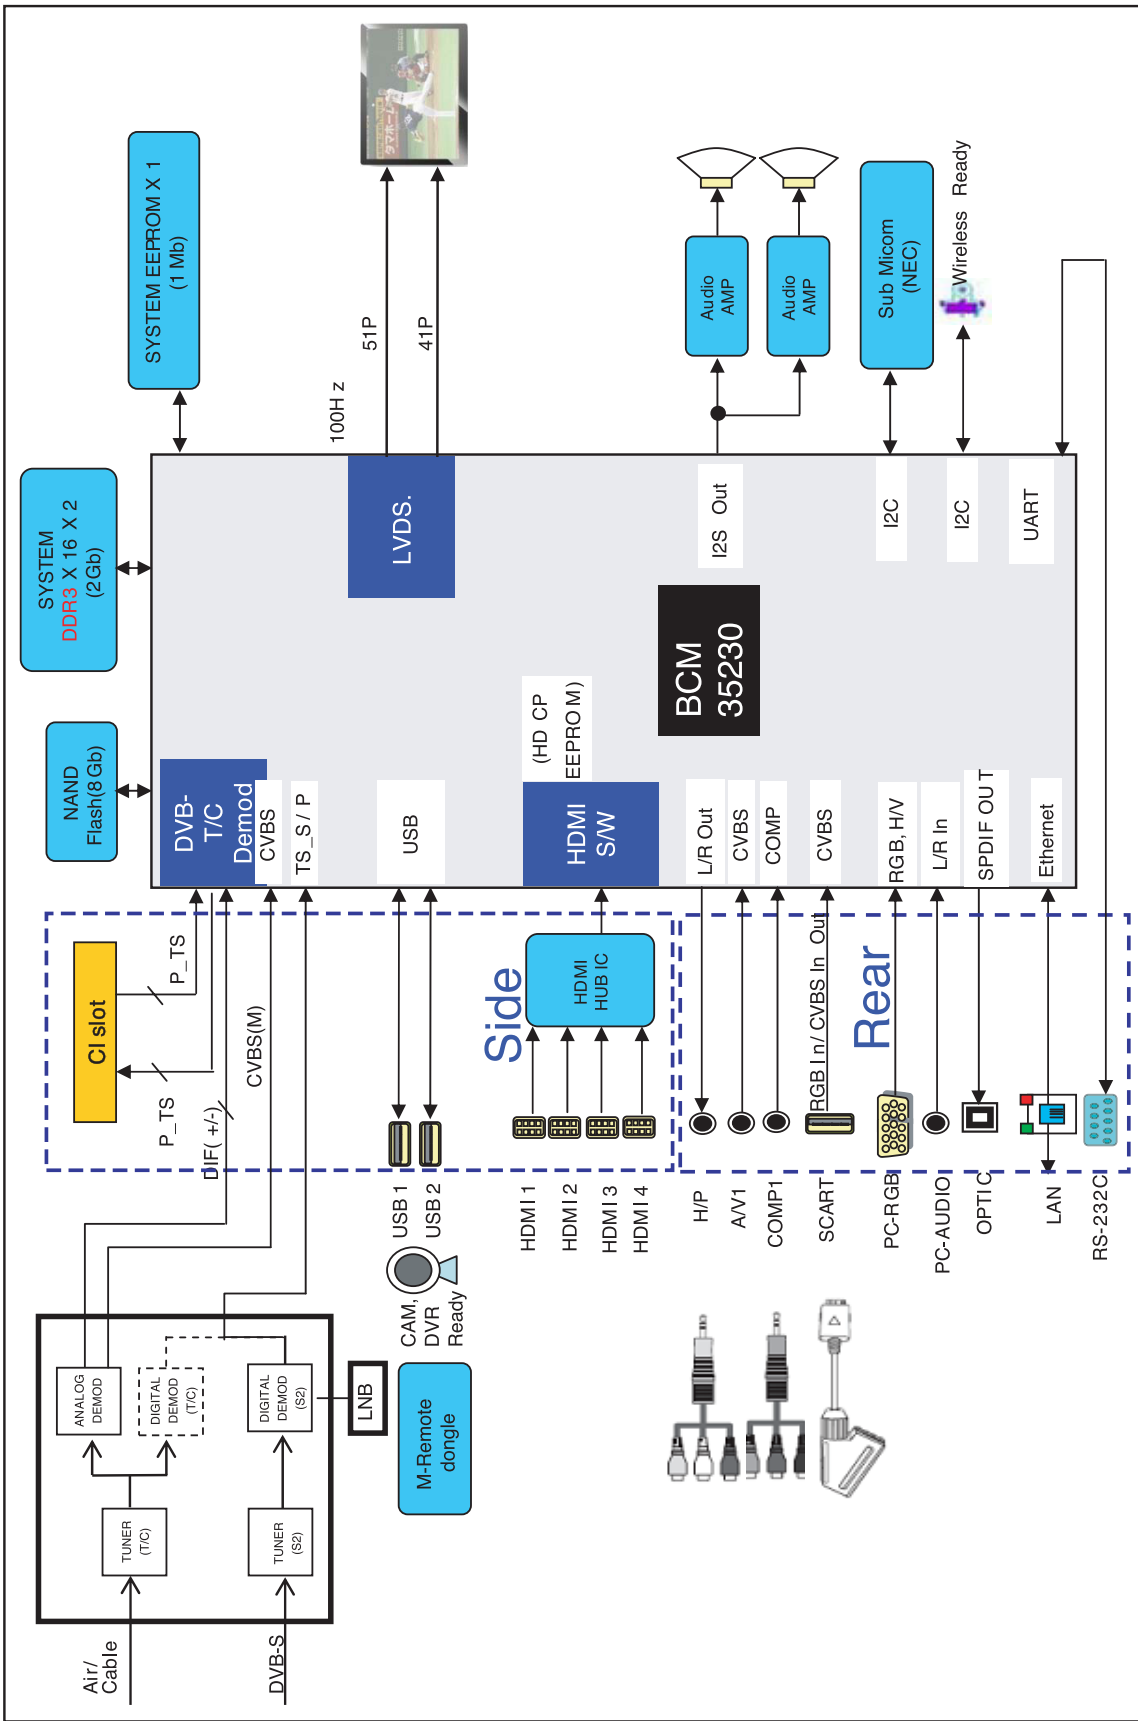


EXPLODED VIEW

IMPORTANT SAFETY NOTICE


Many electrical and mechanical parts in this chassis have special safety-related characteristics. These parts are identified by Δ in the Schematic Diagram and EXPLODED VIEW. It is essential that these special safety parts should be replaced with the same components as recommended in this manual to prevent X-RADIATION, Shock, Fire, or other Hazards. Do not modify the original design without permission of manufacturer.

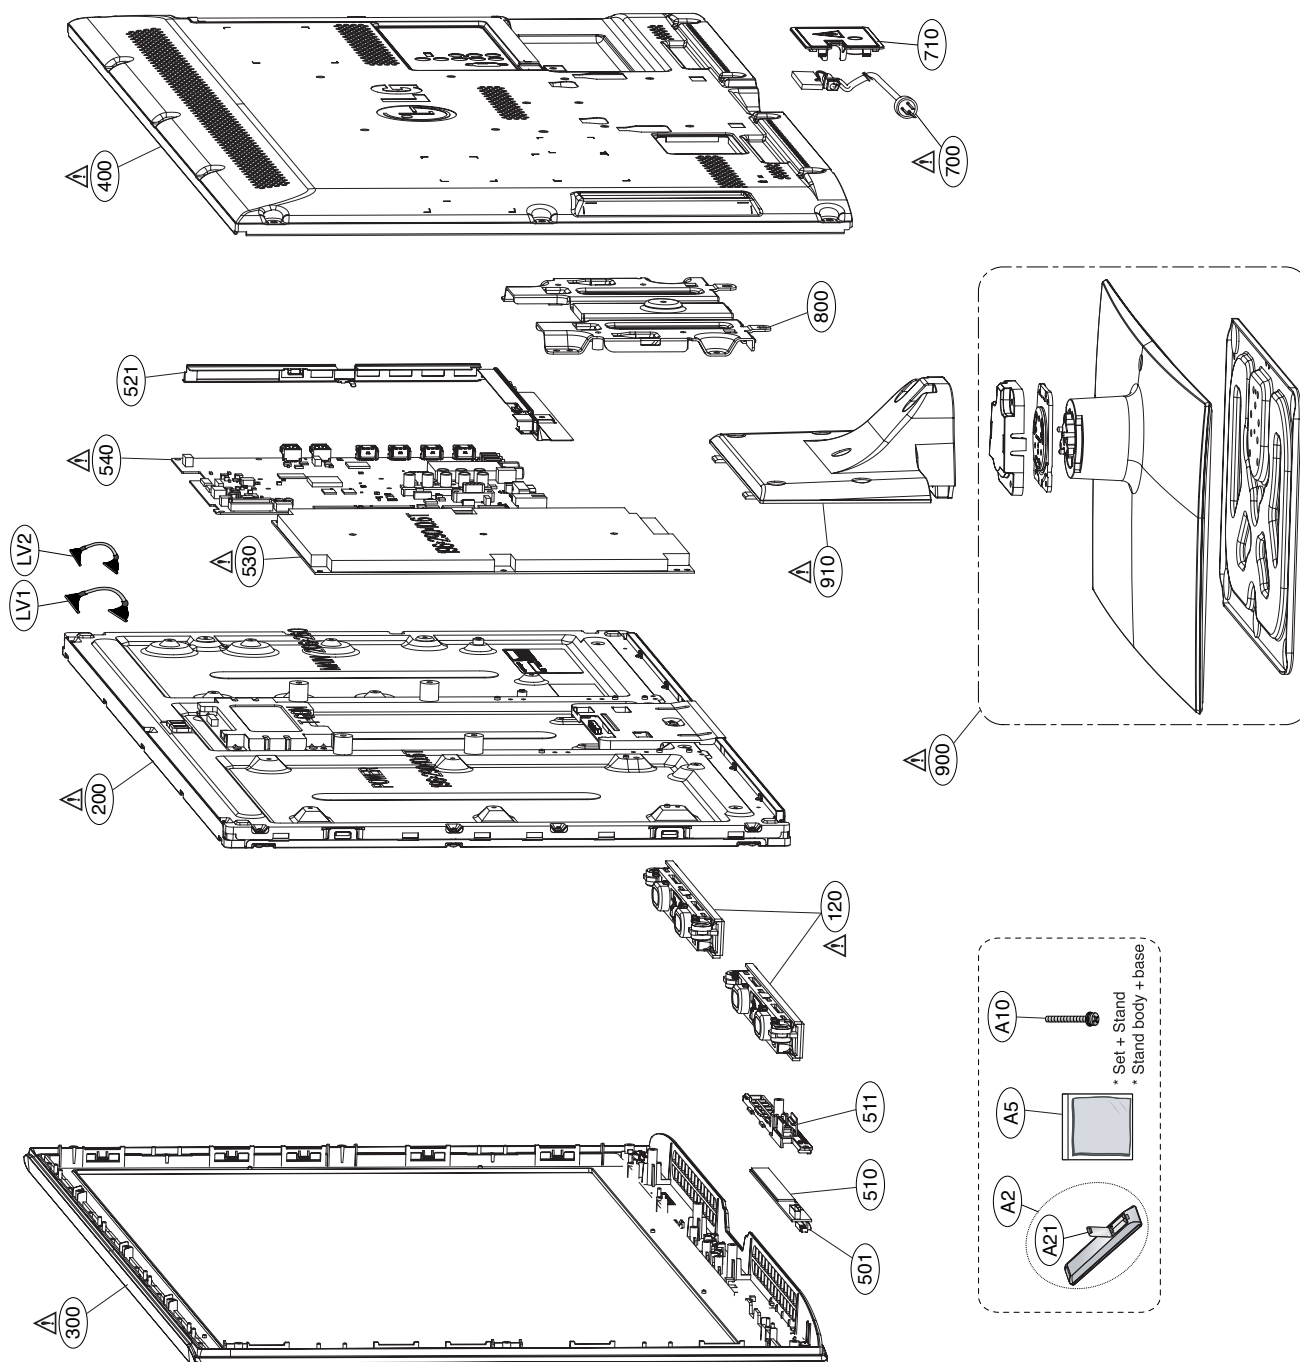


NAND FLASH MEMORY 8Gbit

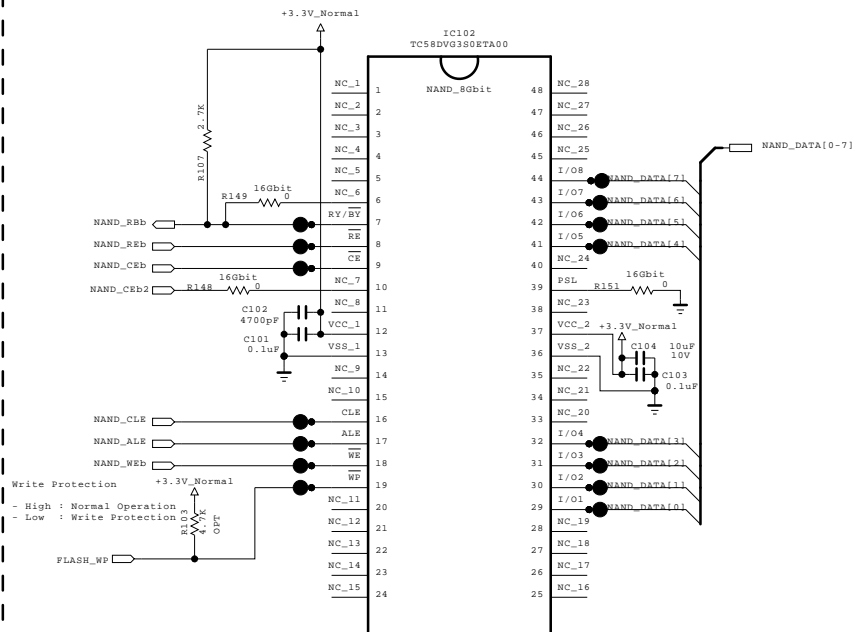


16Gbit

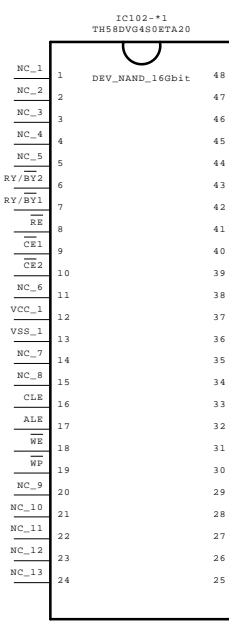

Boot ROM Device Select - (FA4, FAD7, FAD2, FAD1)

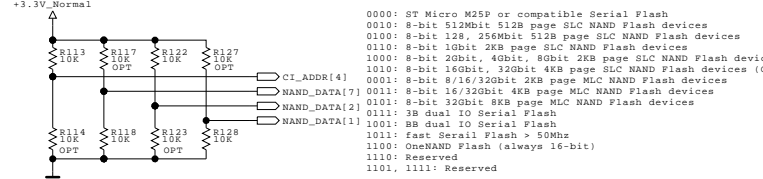


NAND ECC (FA3, FA2, FAL5)

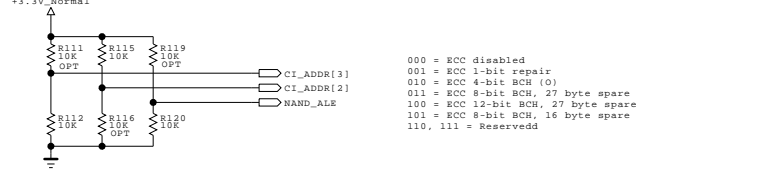


DUAL COMPONENT	
IC102	1ST : EAN61000101 2ND : T-TH58DVG4S0RTA20
IC102-*1	


Strap Setting

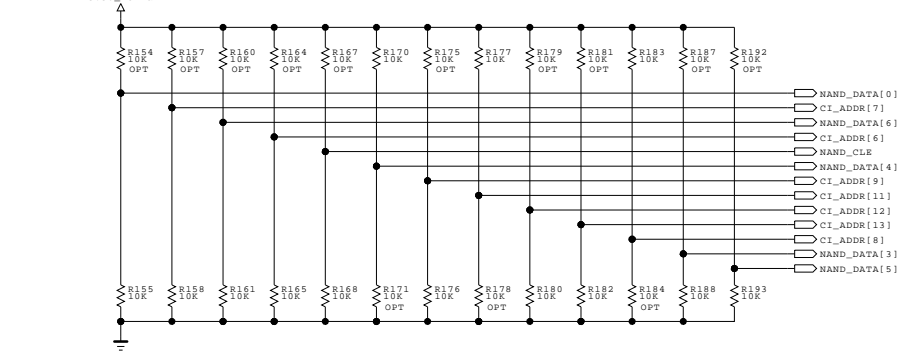



NAND_DATA[0]:
0: System is LITTLE endian (0)
1: System is BIG endian
CI_ADDR[7]:
0: Disable EDID automatic Downloading from Flash (0)
1: Enable EDID automatic Downloading from Flash (0)
NAND_DATA[6]:
0: Disable OSC clock output on chip Pin (0)
1: Enable OSC clock output on chip Pin.
CI_ADDR[6]:
0: Host MIPS run at 500 Mhz (0)
1: Host MIPS run at 250 Mhz
NAND_DATA[4]:
0: 27Mhz TVM Crystal Frequency (0)
1: 54Mhz TVM Crystal Frequency (0)

CI_ADDR[9], CI_ADDR[11], CI_ADDR[12], CI_ADDR[13]:
TVM Crystal oscillator bias/gain control
0000: 250uA
0001: 390uA
0010: 570uA
0011: 730uA
0100: 890uA (0)
0111: 1390uA
1000: 1416uA
1111: 2196uA
0101, 0110, 1001, 1010, 1011, 1100, 1101, 1110: Reserved
CI_ADDR[8]:
0: RESETOUTB (in On/Off only) stay asserted until software releases them.
1: Fix amount of delay for de-assertion on RESETOUTB (in On/Off only) at end of RESET pulse (0)
NAND_CLE:
0: Differential Oscillators TVM not bypassed (0)
1: Differential Oscillators TVM bypassed
NAND_DATA[3]:
0: MIPS will boot from external flash (0)
1: MIPS will boot from ROM
NAND_DATA[5]:
0: FLASH MODE (0)
1: SSC_SLAVE(BB) MODE


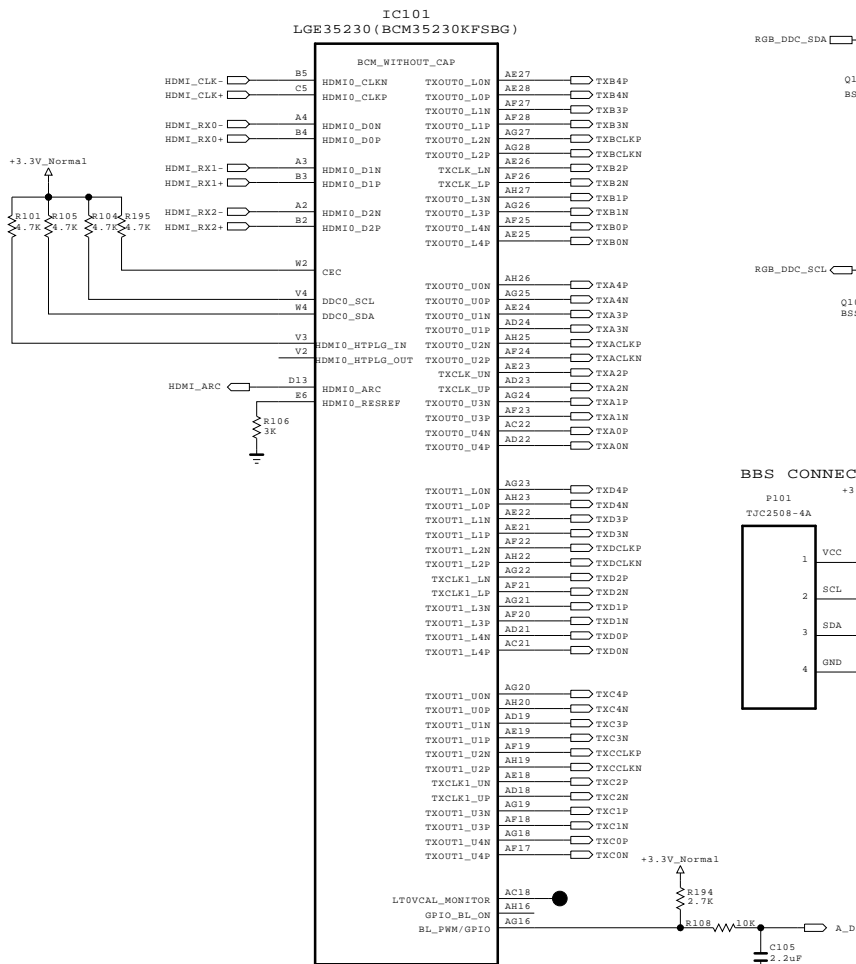




		HIGH	LOW
MODEL_OPT_2		FHD	HD
MODEL_OPT_3		OLED	LCD
MODEL_OPT_4	DDR speed	1333	1600
MODEL_OPT_5	T2 Tuner	Support	Not Support
MODEL_OPT_6	S Tuner	Support	Not Support
MODEL_OPT_7	PHM	Enable	Disable

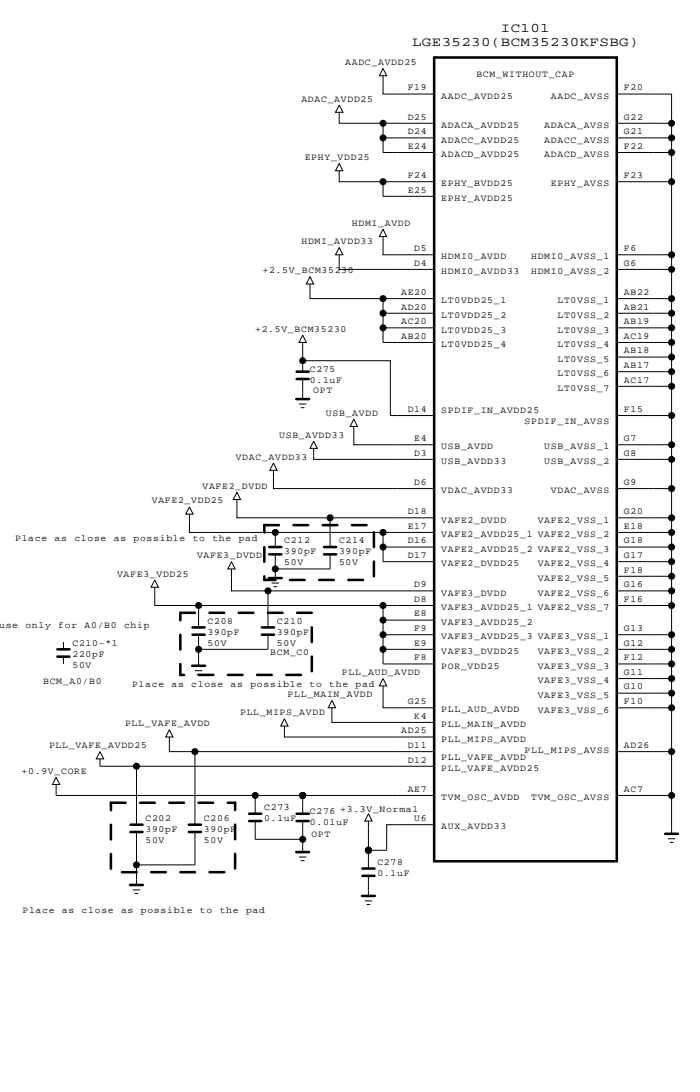
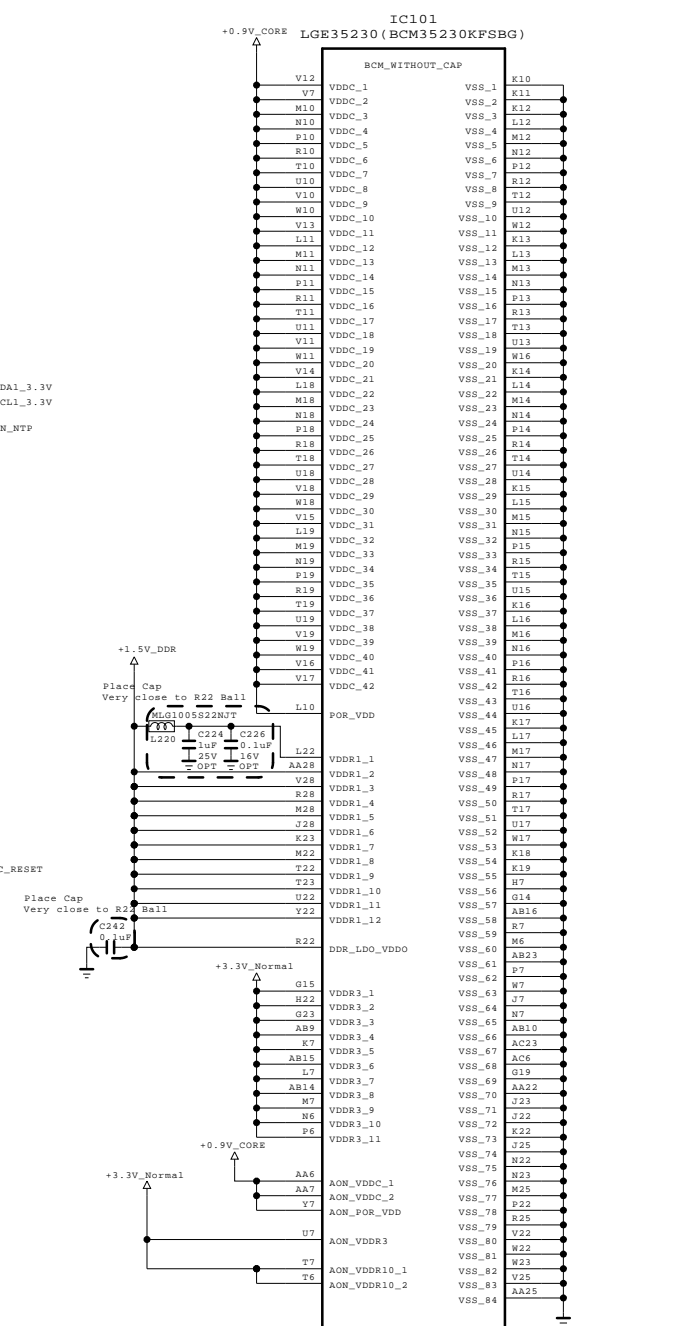


MODEL	BCM35230	DATE	
BLOCK	MAIN POWER	SHEET	02 /

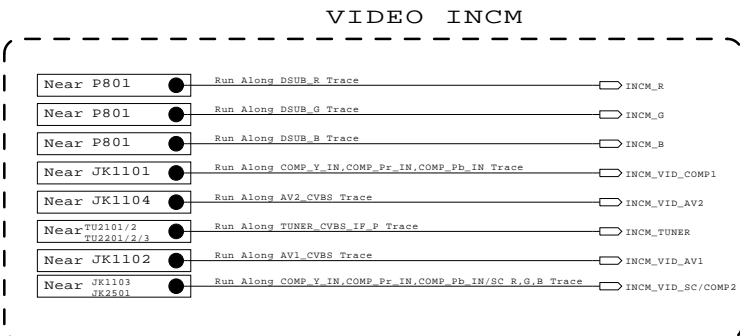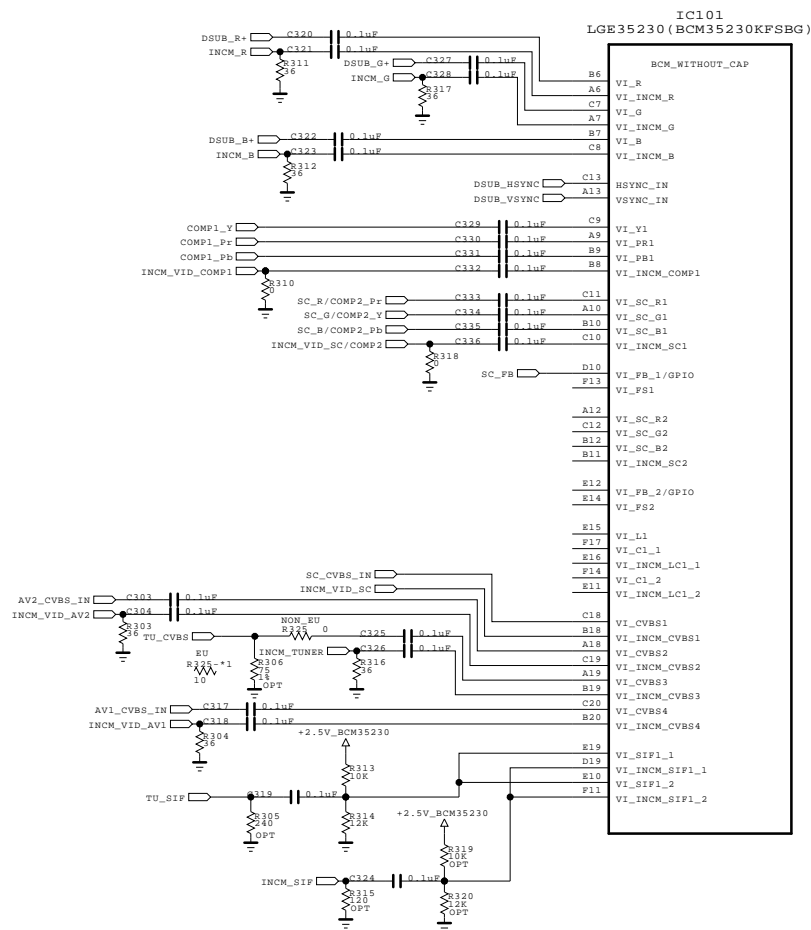

BCM35230_with_CAP_220pF

IC101-*1 LGE35230	
BCM_WITH_CAP	
B6	VI_R
A6	VI_INCM_R
C7	VI_G
A7	VI_INCM_G
B7	VI_B
C8	VI_INCM_B
C13	HSYNC_IN
A13	VSYNC_IN
C9	VI_Y1
A9	VI_Pr1
B9	VI_Pr1
B8	VI_INCM_COMP1
C11	VI_SC_R1
A10	VI_SC_G1
B10	VI_SC_B1
C10	VI_INCM_SC1
D10	VI_FB_1/GPIO
F13	VI_Fs1
A12	VI_SC_R2
C12	VI_SC_G2
B12	VI_SC_B2
B11	VI_INCM_SC2
E12	VI_FB_2/GPIO
E14	VI_Fs2
E15	VI_L1
F17	VI_C1_1
E16	VI_INCM_LC1_1
F14	VI_C1_2
E11	VI_INCM_LC1_2
C18	VI_CVBS1
B18	VI_INCM_CVBS1
A18	VI_CVBS2
C19	VI_INCM_CVBS2
A19	VI_CVBS3
B19	VI_INCM_CVBS3
C20	VI_CVBS4
B20	VI_INCM_CVBS4
E19	VI_SIF1_1
D19	VI_INCM_SIF1_1
E10	VI_SIF1_2
F11	VI_INCM_SIF1_2

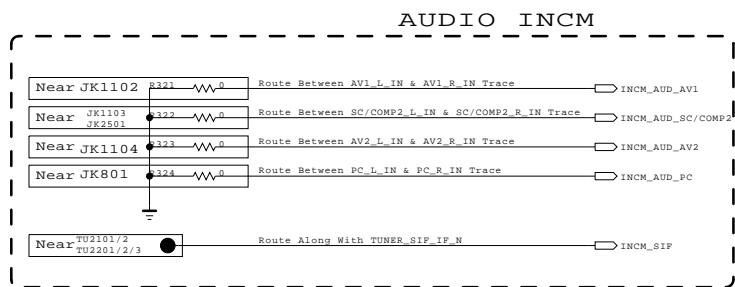
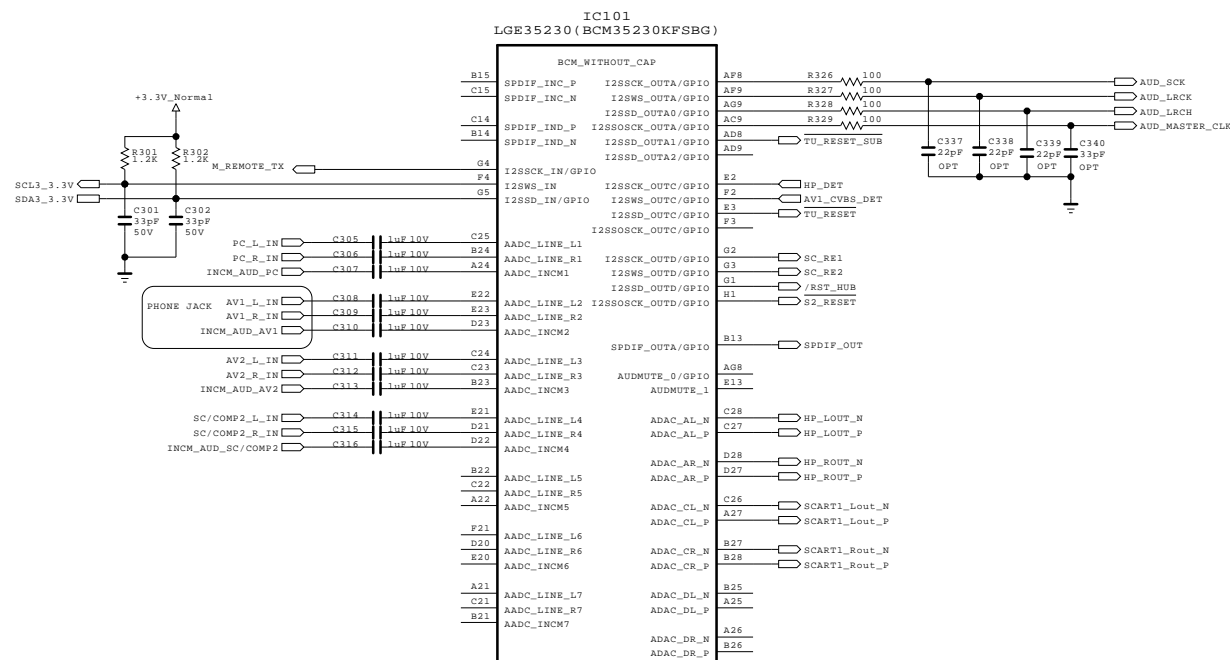


THE SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FILRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE SYMBOL MARK OF THE SCHEMATIC.






SECRET
LGElectronics

LG ELECTRONICS

MODEL	BCM35230	DATE	
BLOCK	MAIN AUDIO/VIDEO	SHEET	03

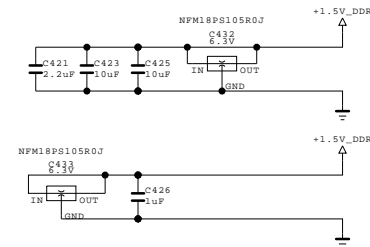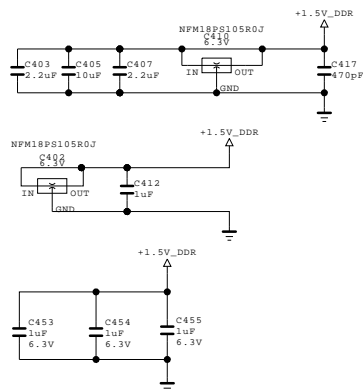

DUAL COMPONENT	
IC401,IC402	1ST : EAN61667501, 2ND : EAN61570701
IC401-*1 IC402-*1	1ST : T-K4B2G1646B_HCK0, 2ND : T-H5TQ2G63BFR-PBC

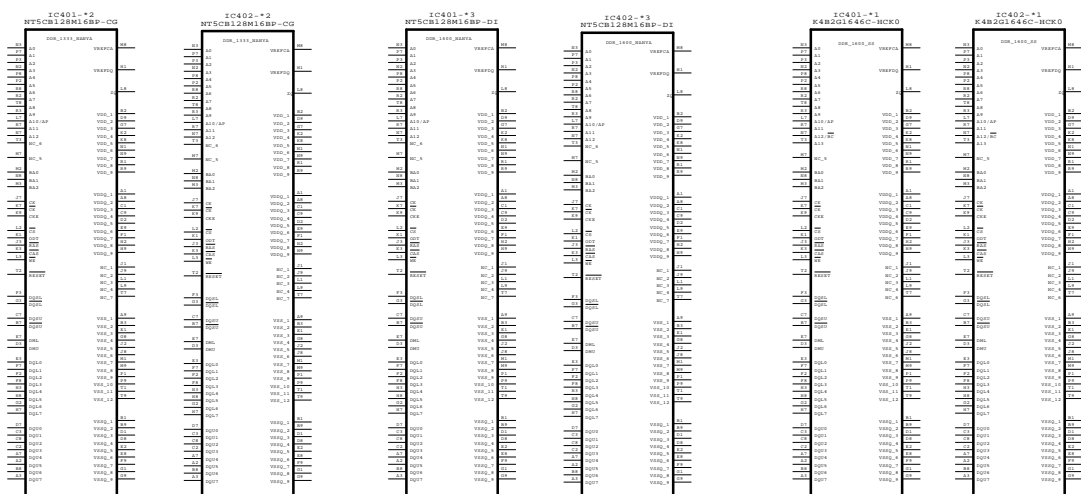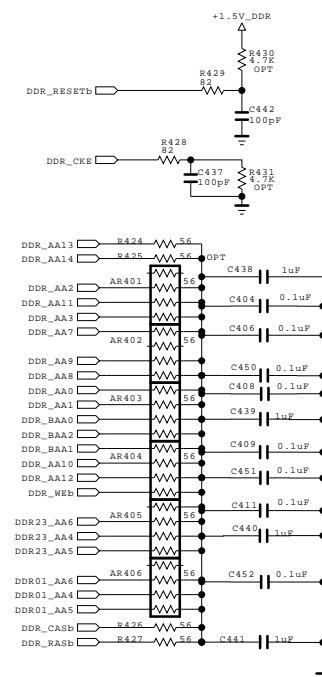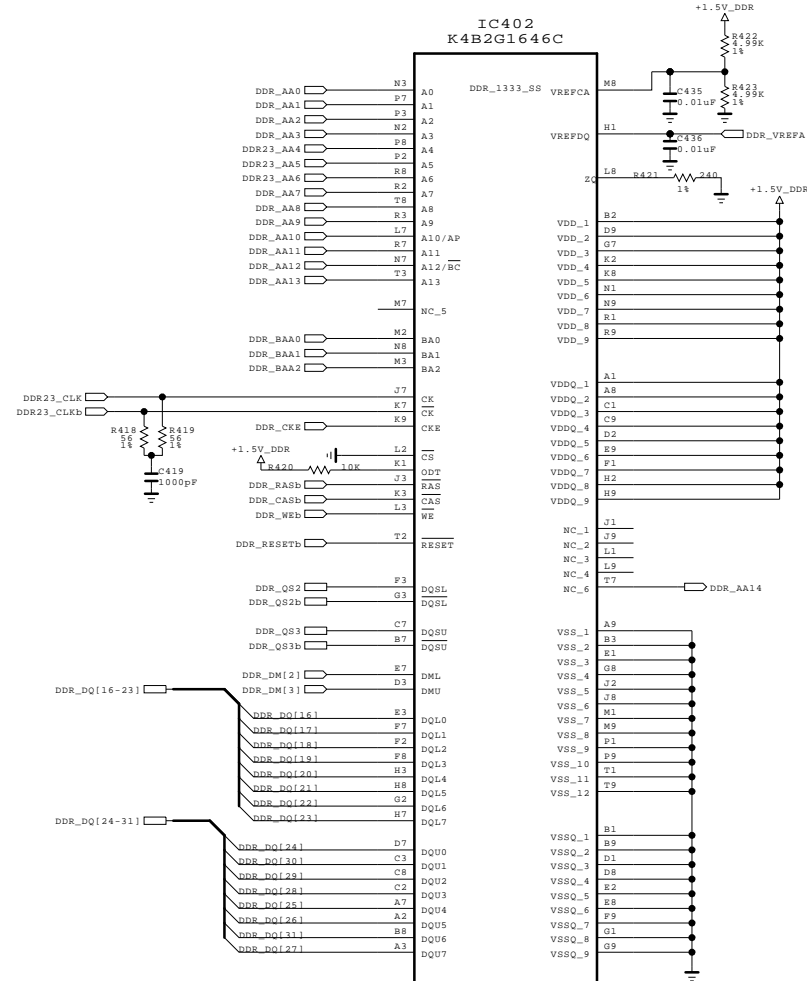
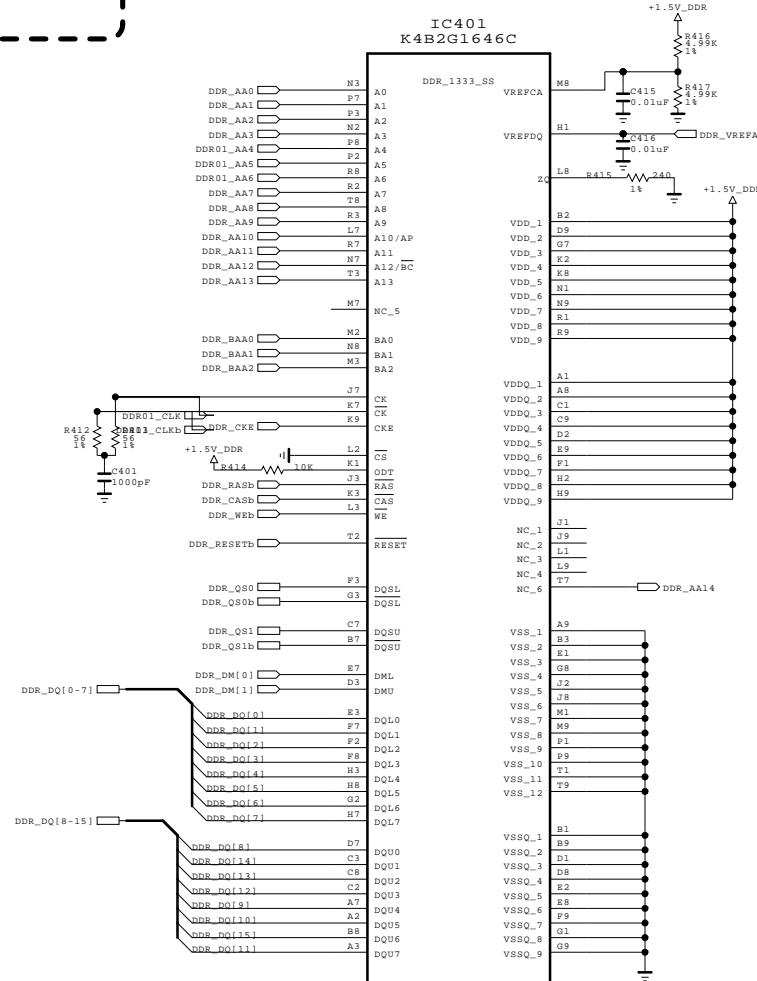
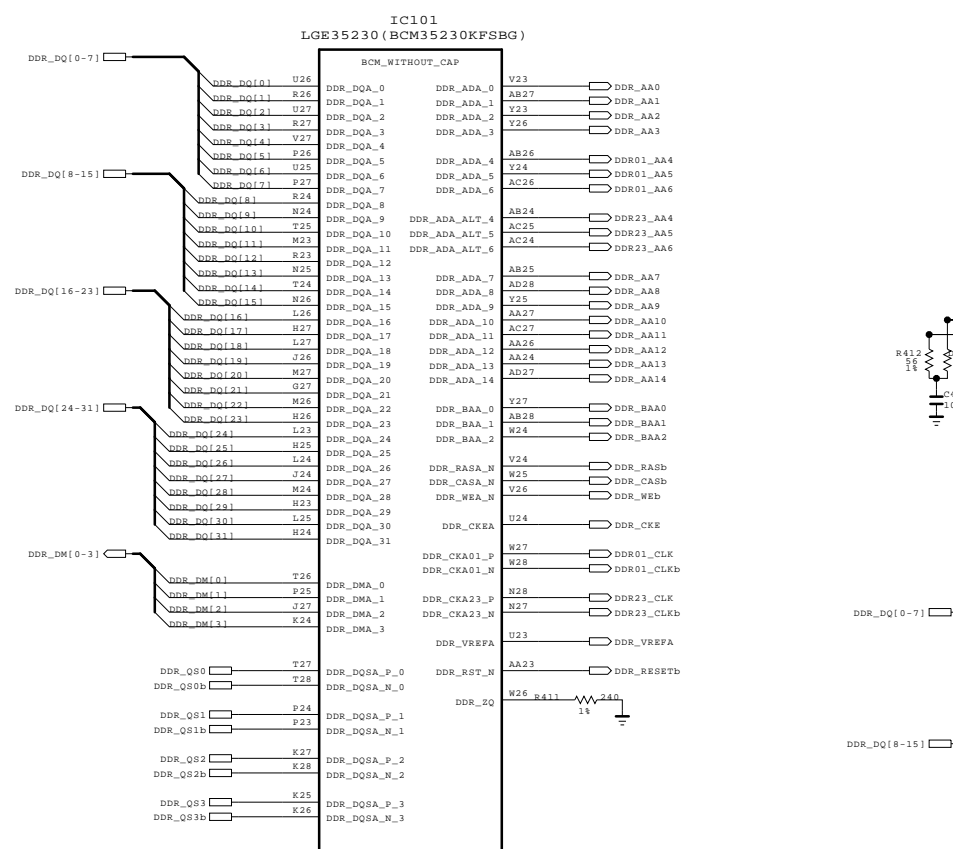


SECRET
LGElectronics



MODEL	BCM35230	DATE	
BLOCK	MAIN DDR	SHEET	04 /


NEC MICOM

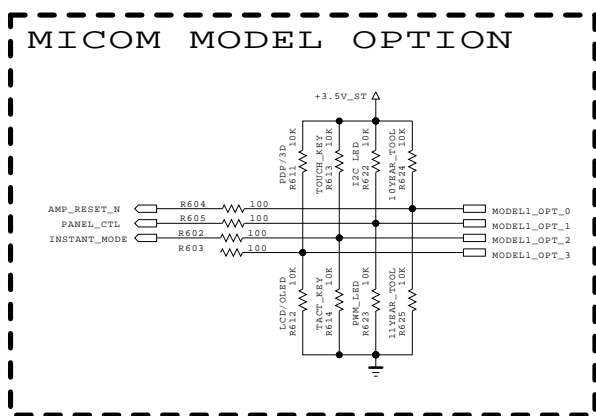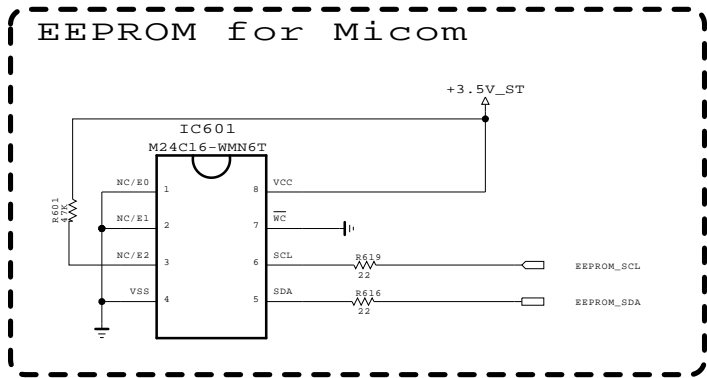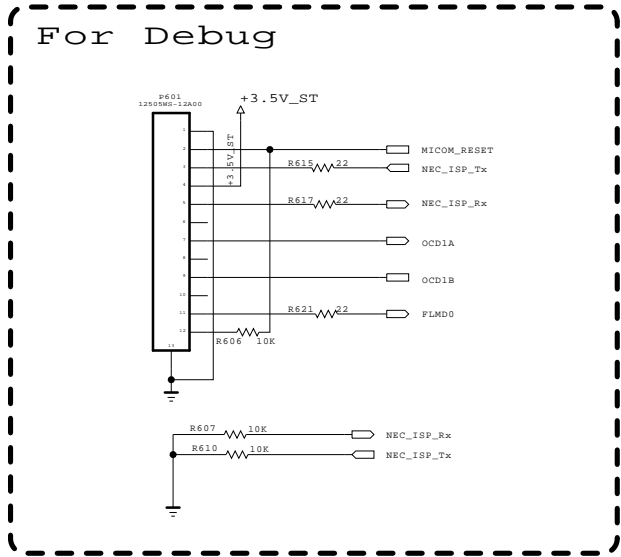



MODEL OPTION				
PIN NAME	PIN NO.	HIGH	LOW	
MODEL_OPT_0	8	10YEAR_TOOL (10 SENSOR)	11YEAR_TOOL (11 SENSOR)	
MODEL_OPT_1	11	I2C_LED	PWM_LED	
MODEL_OPT_2	10	TOUCH_KEY	TACT_KEY	
MODEL_OPT_3	11	PDP/3D	LCD/OLED	

	LCD	PDP	OLED	3D
MODEL_OPT_3	0	1	0	1

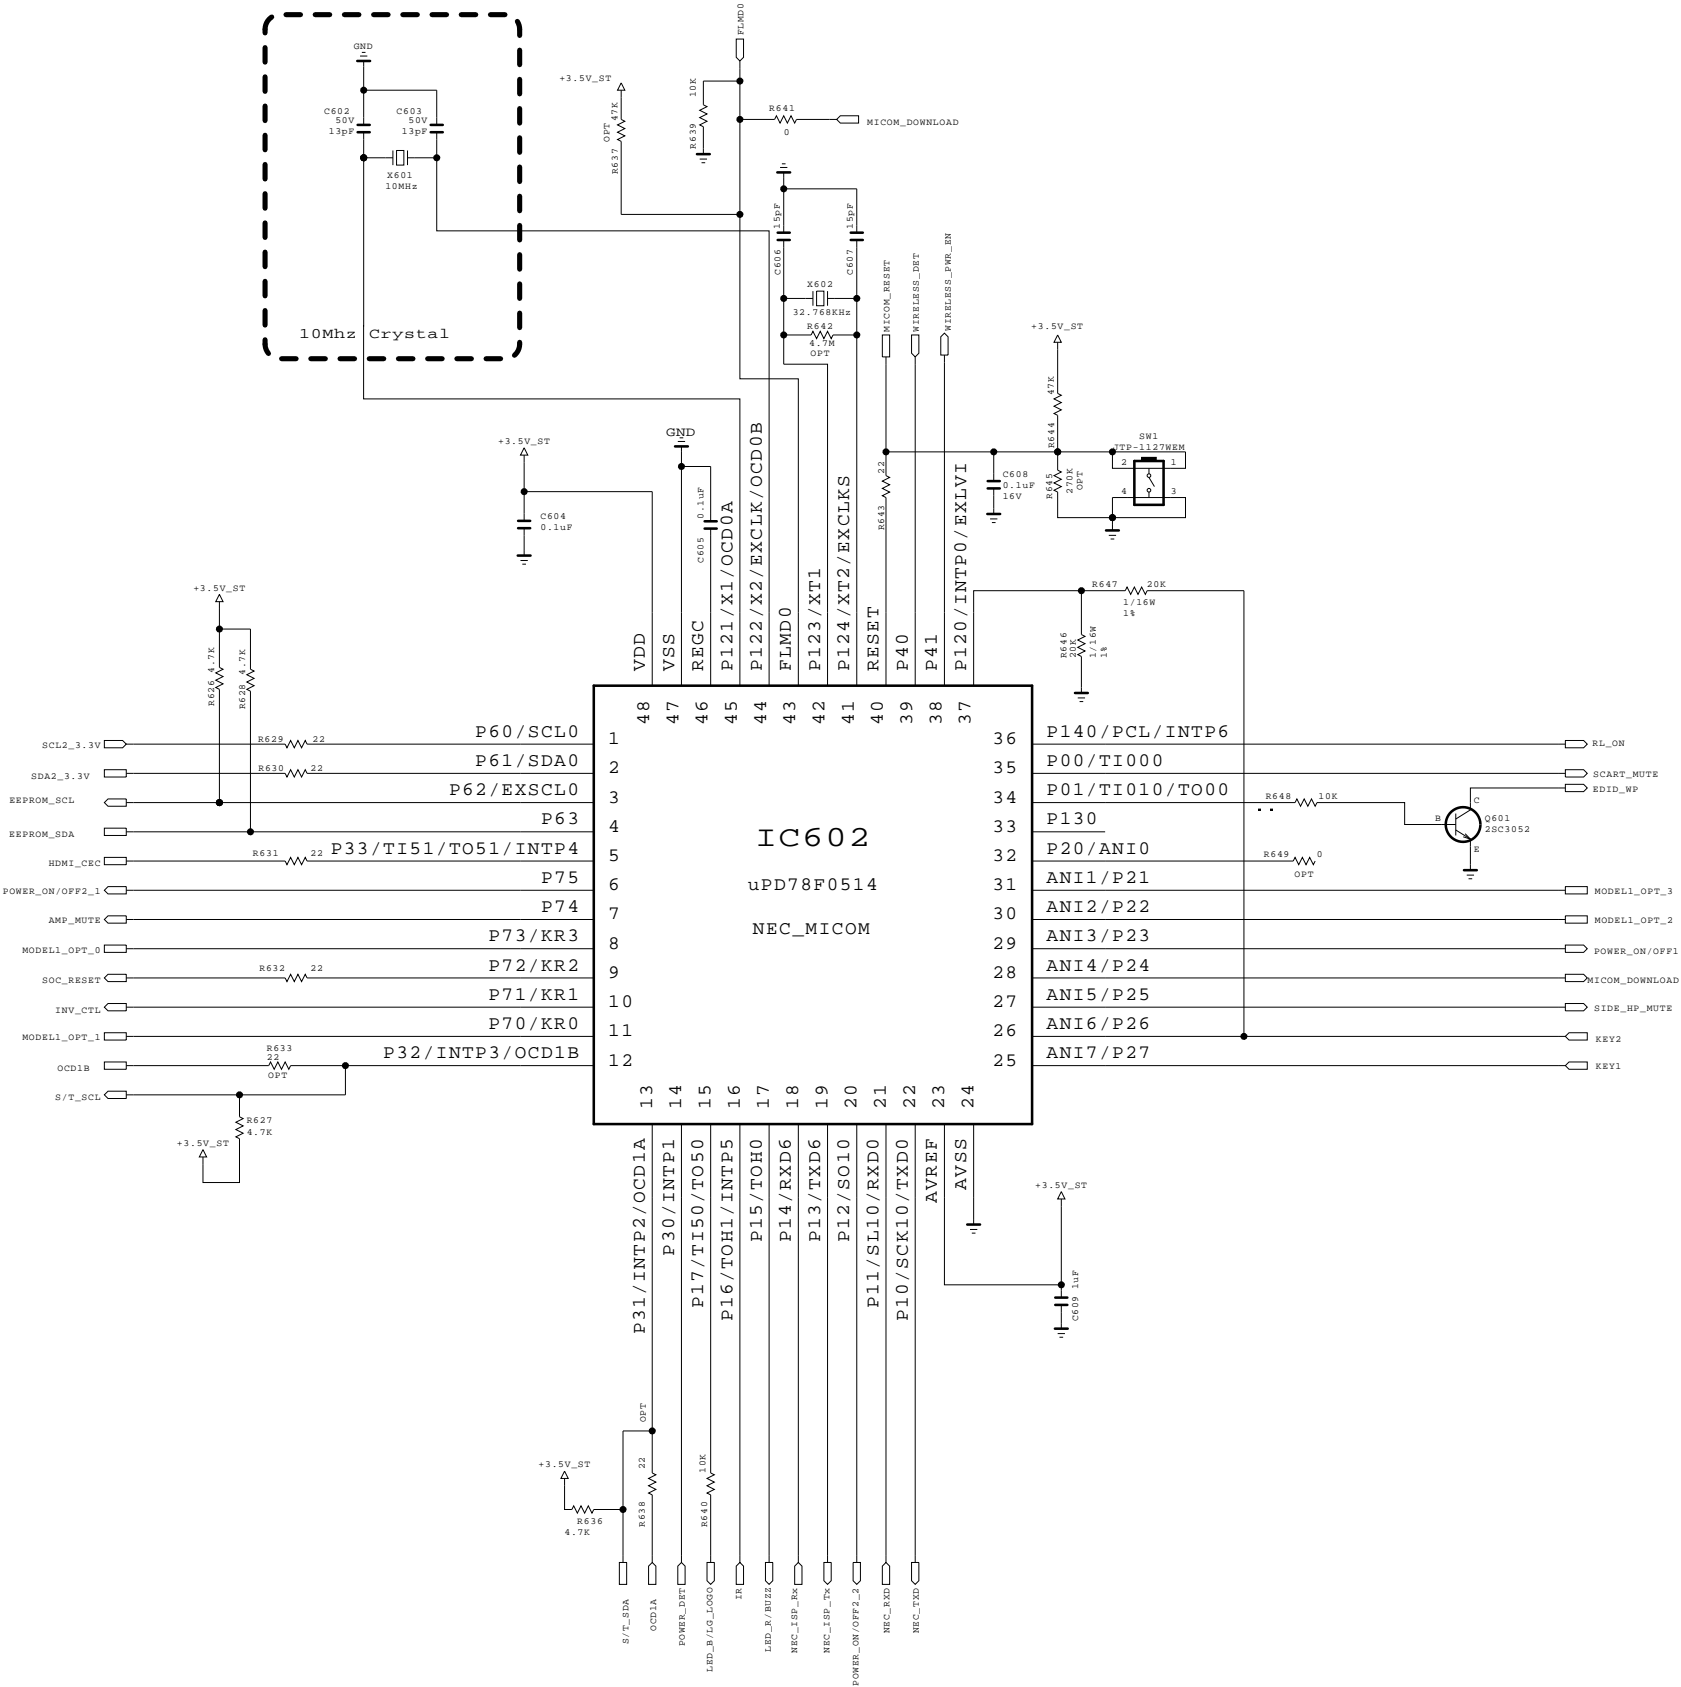	LOW	LOW_SMALL	TBD	HIGH
MODEL_OPT_1	0	0	1	1
MODEL_OPT_2	0	1	0	1




THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FILRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.


SECRET
LGElectronics




MODEL	BCM35230	DATE	
BLOCK	MICOM	SHEET	6 / 50

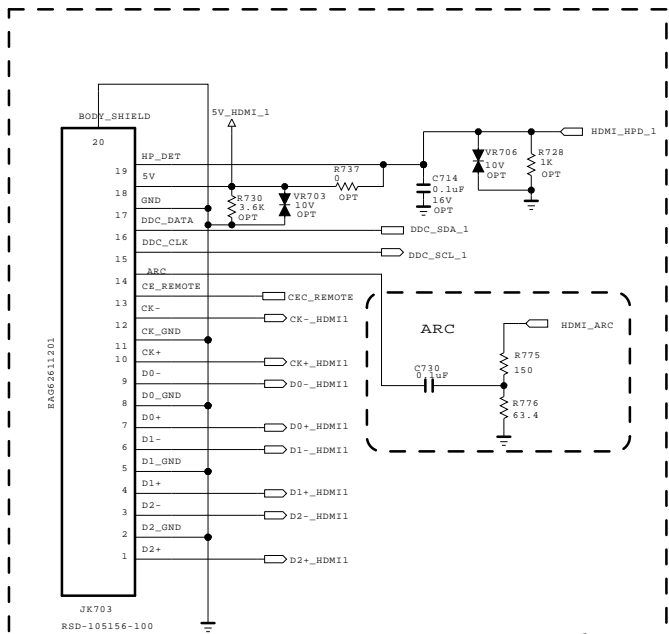

HDMI 1

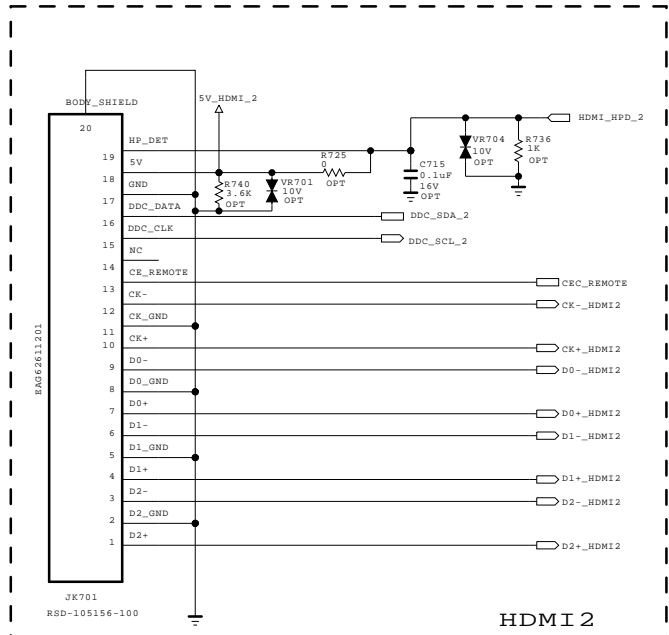


HDMI 2

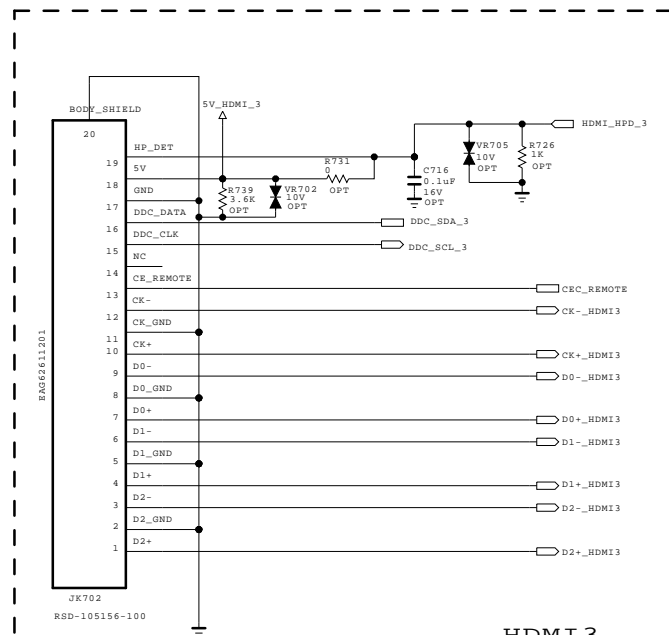


HDMI 3


THE SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FILTRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE SYMBOL MARK OF THE SCHEMATIC.

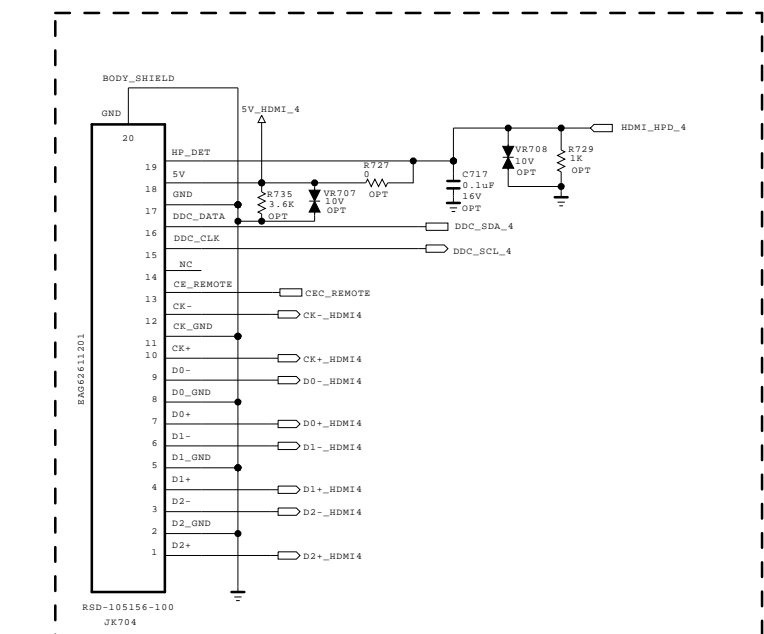

HDMI 4

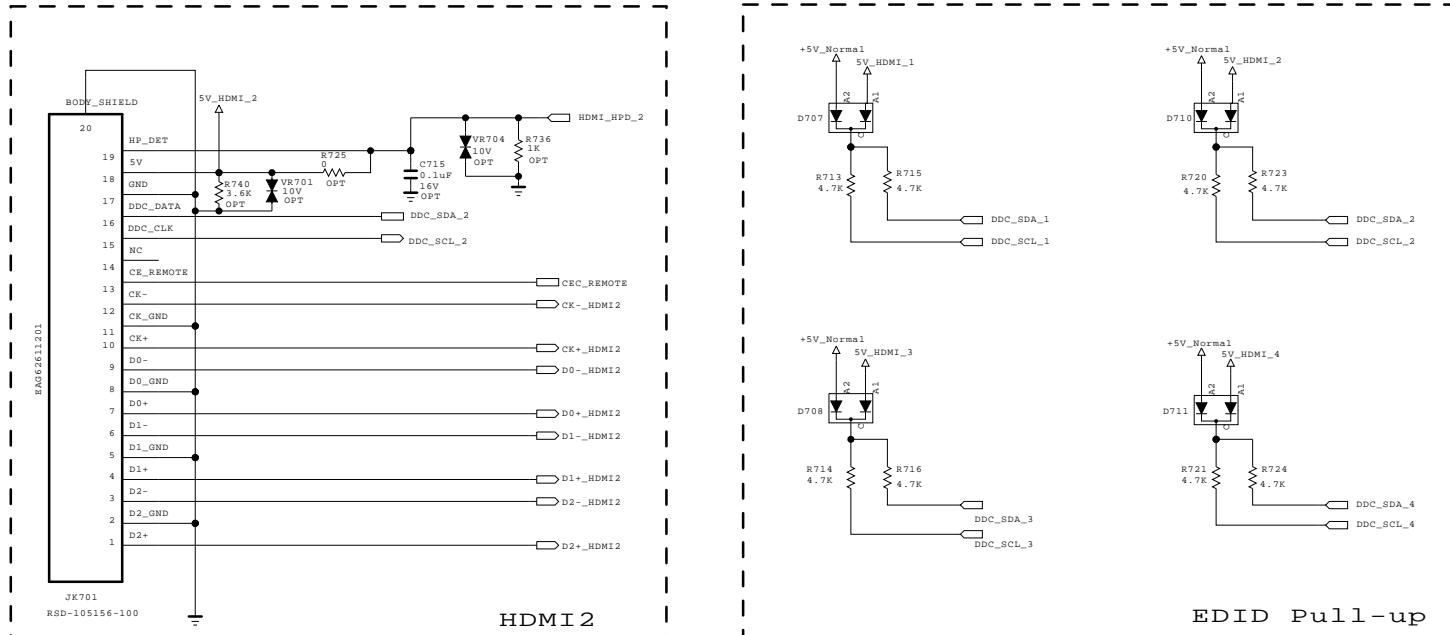

EDID Pull-up

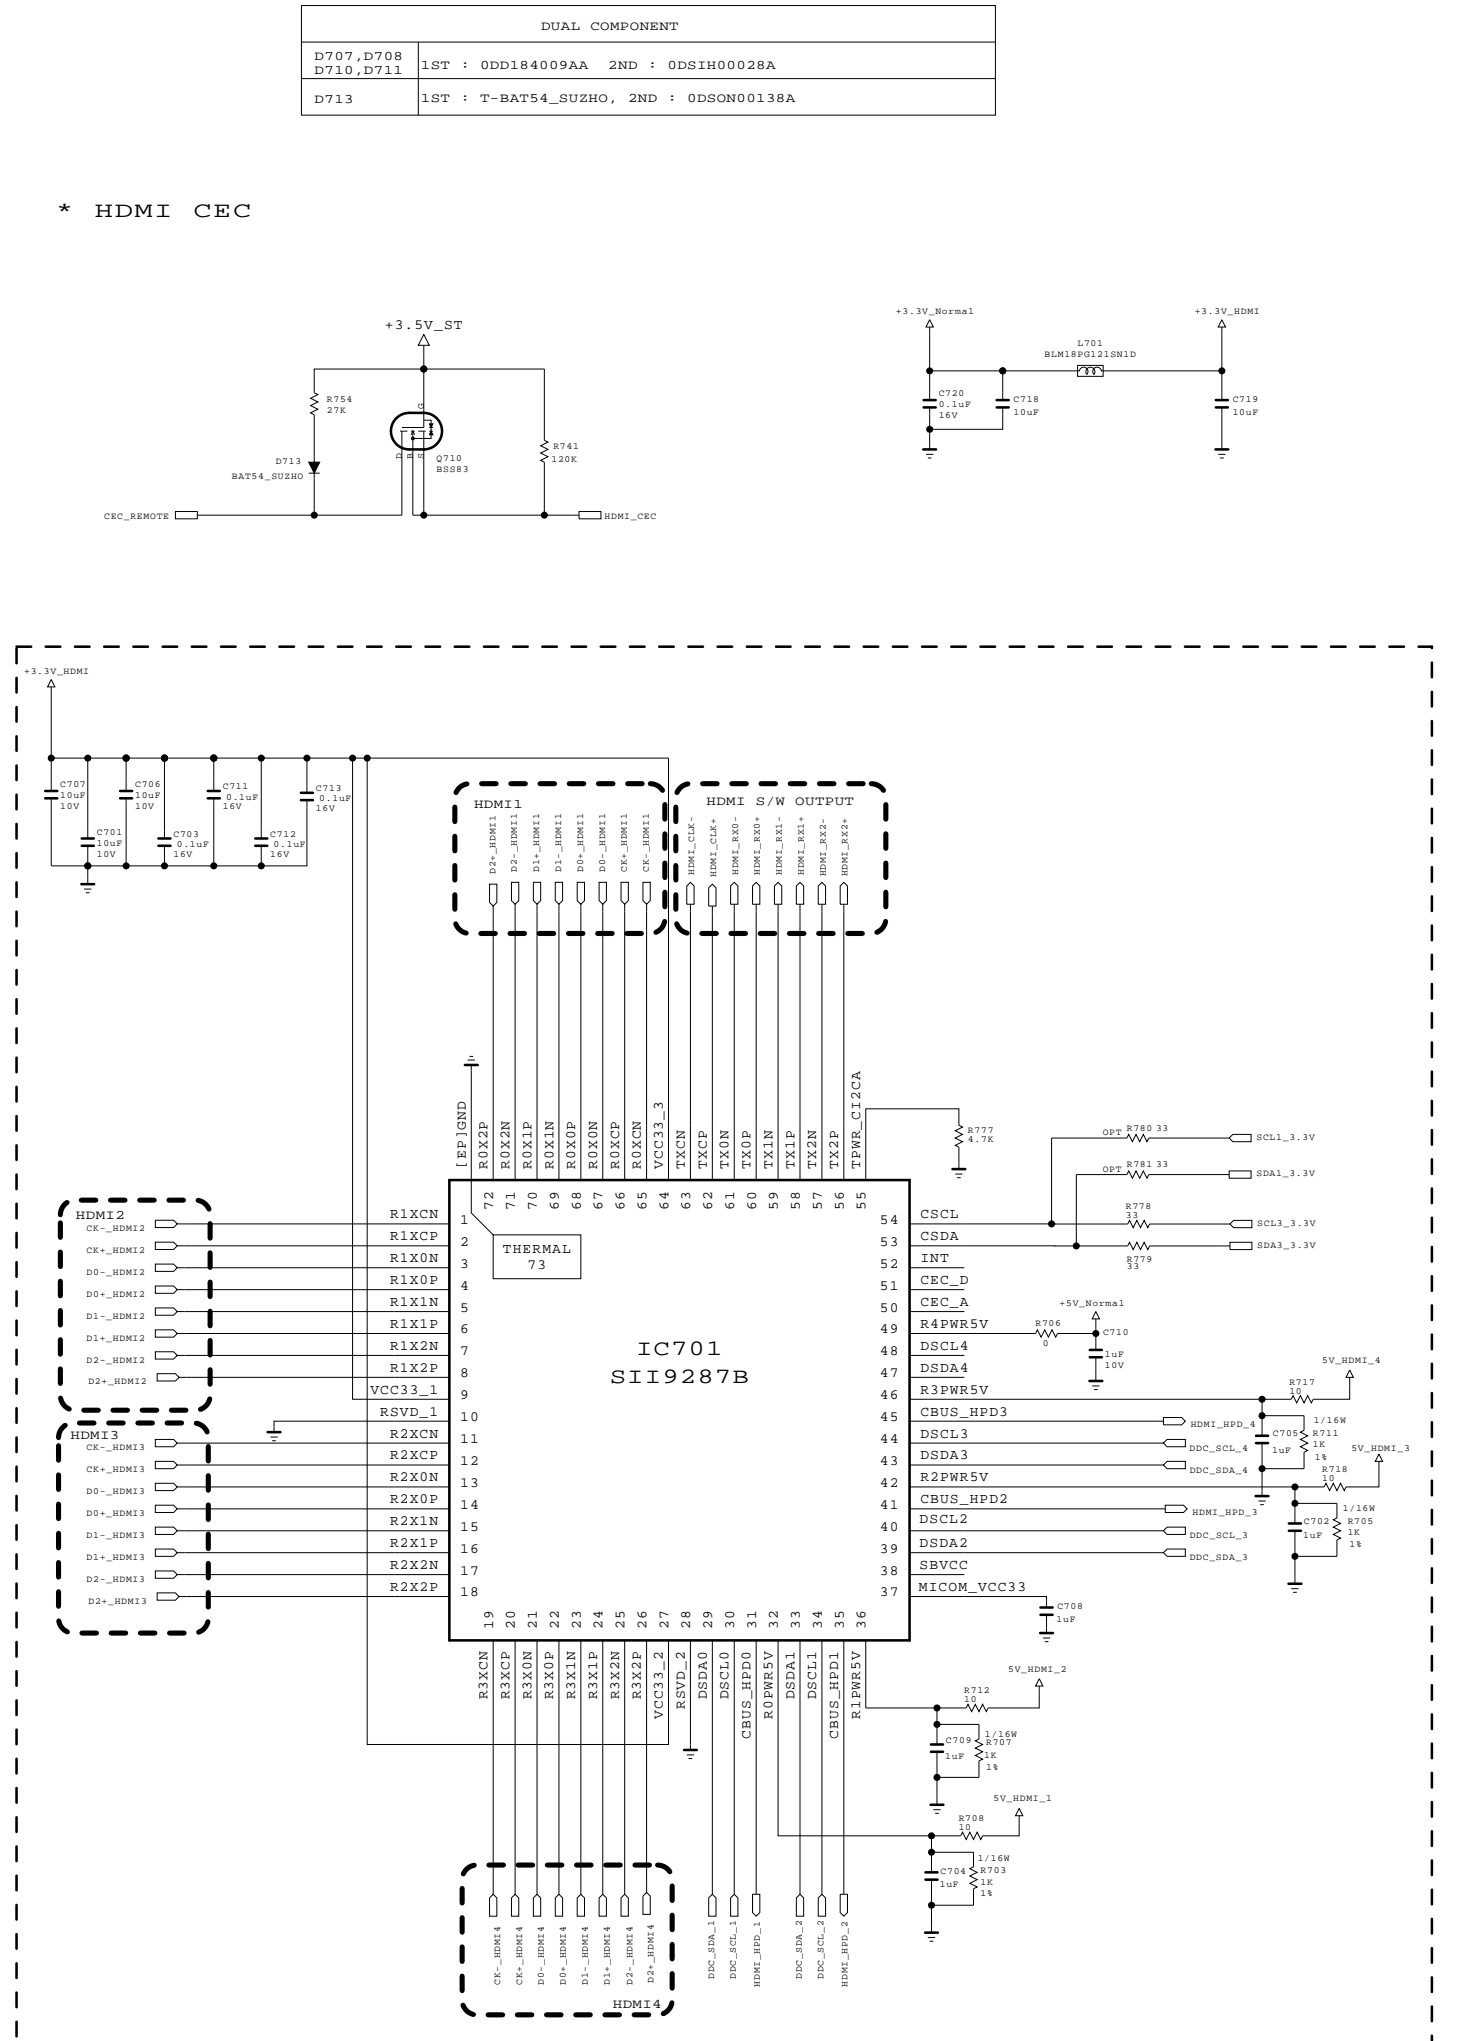


* HDMI CEC

SECRET
LGElectronics


LG ELECTRONICS

MODEL	BCM35230	DATE	
BLOCK	HDMI	SHEET	7 / 31

RGB PC

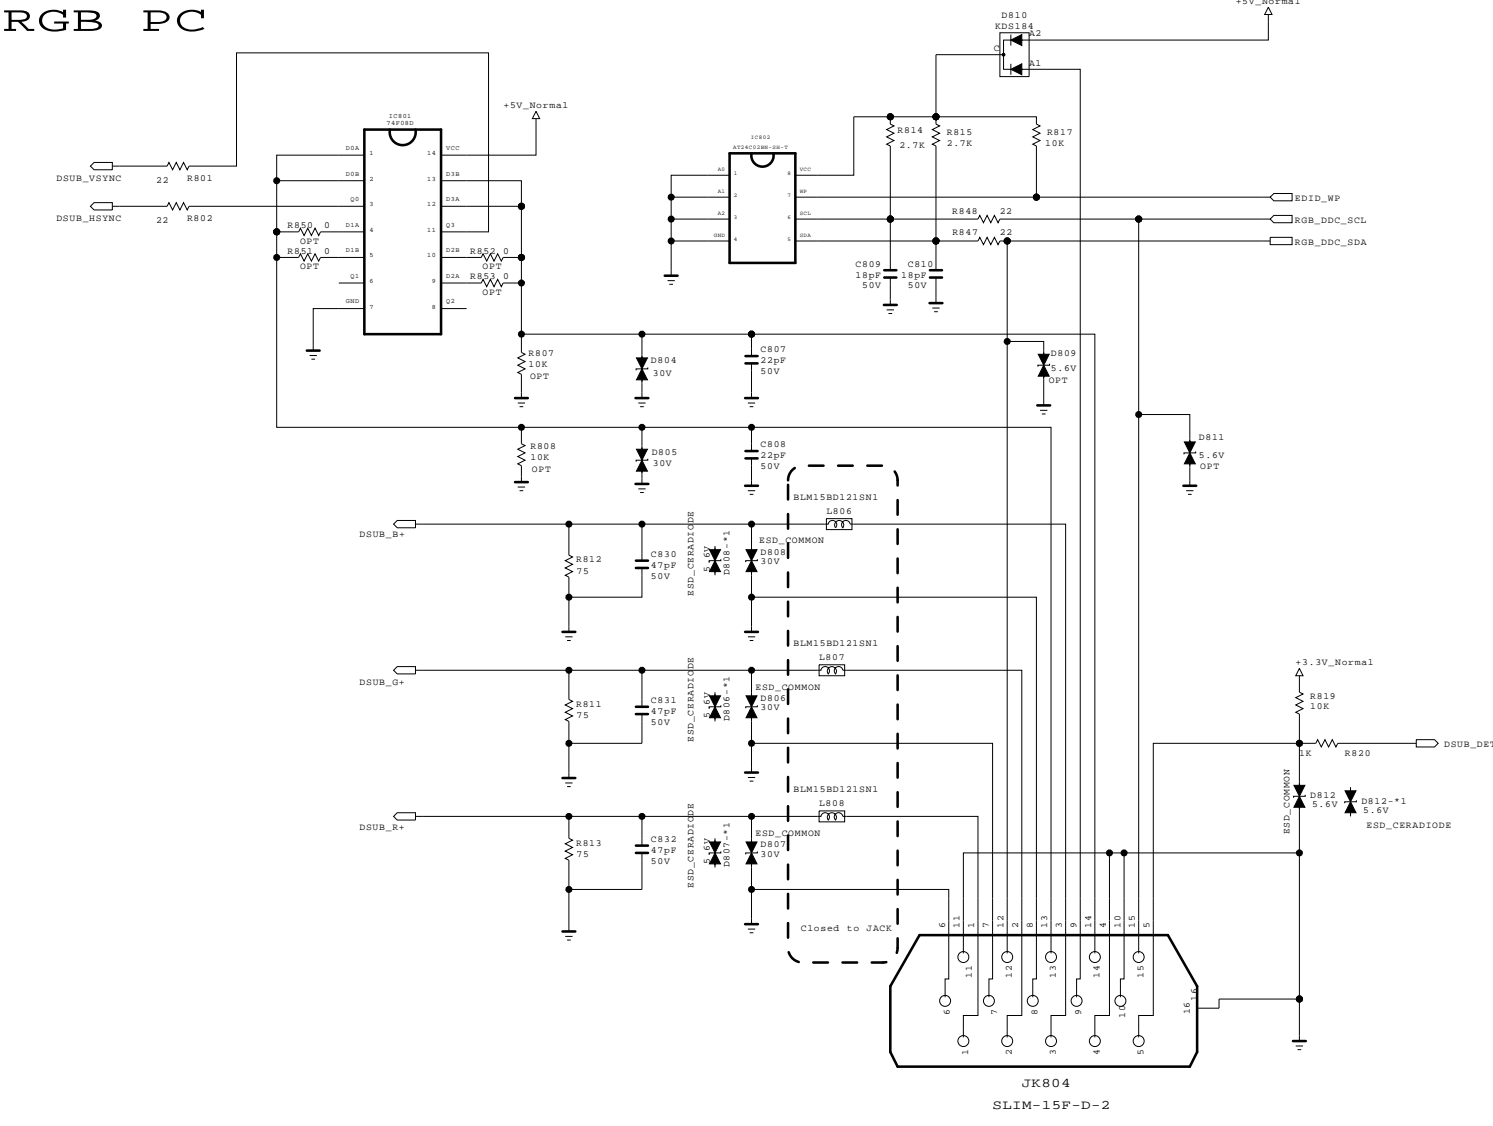


EARPHON JACK

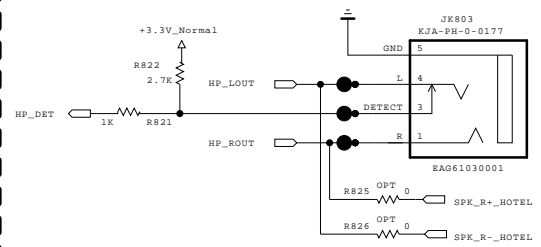


DUAL COMPONENT	
D804,D805,D806 D807,D808,D813 D814	1ST : EAH39491601, 2ND : EAH33945901
D810	1ST : ODD184009AA, 2ND : ODSIH00028A
Q801	1ST : OTRIY80001A, 2ND : OTR387500AA
IC805	1ST : EAN61151201, 2ND : EAN61130001

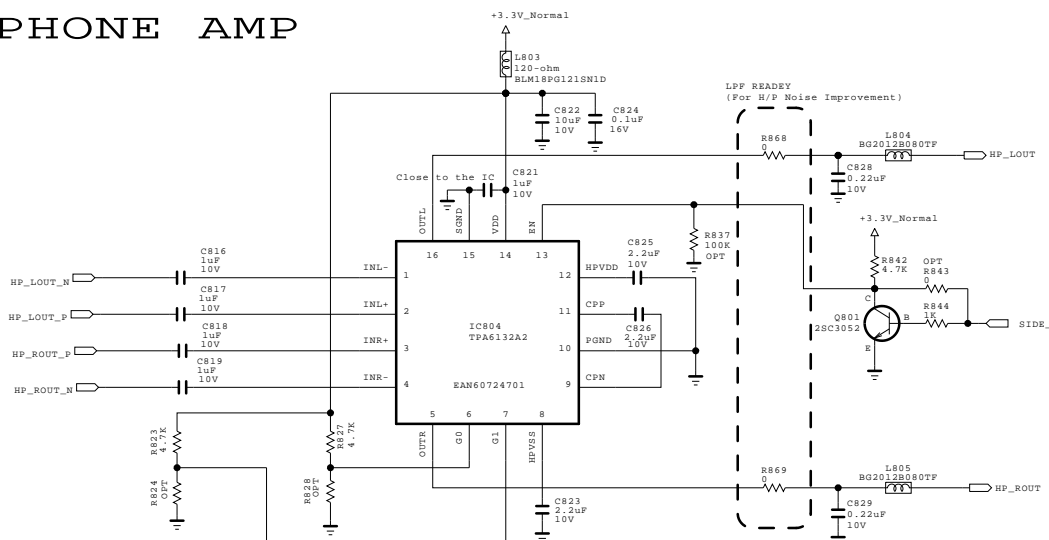

EARPHONE AMP



DUAL COMPONENT		
Q901,Q902,Q903 Q904,Q905,Q906	1ST : OTRIY80001A	2ND : OTR387500AA
D903,D904 D905,D906	1ST : EAH42720601,	2ND : EAH60994401

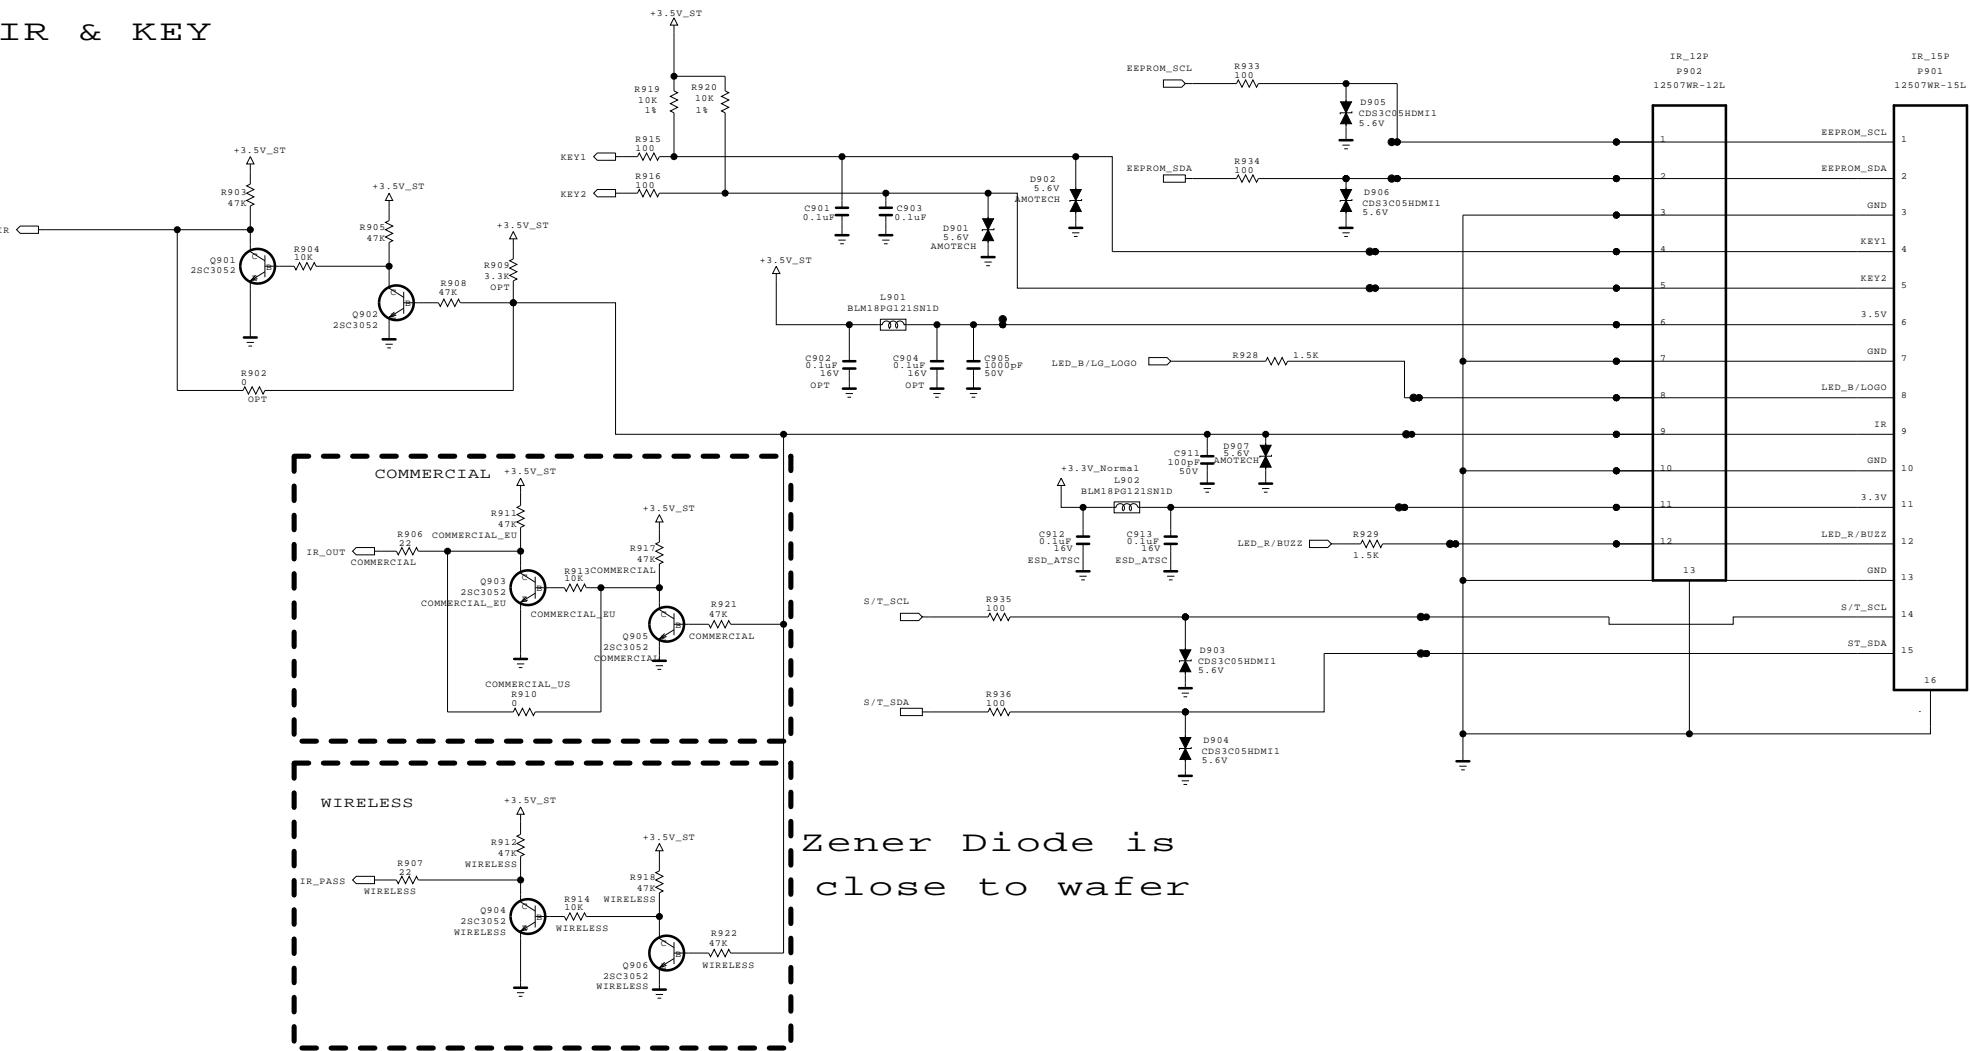IR & KEY



THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FILRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.

SECRET
LGElectronics






MODEL	BCM35230	DATE	
BLOCK	IR / KEY	SHEET	9 / 50

WIRELESS READY MODEL

DUAL COMPONENT		
D1001,D1002	1ST : EAH42720601	2ND : EAH60994401
Q1001	1ST : EBK61012601,	2ND : 0TRDI80002A
Q1002	1ST : EBK60752501,	2ND : EBK61011501

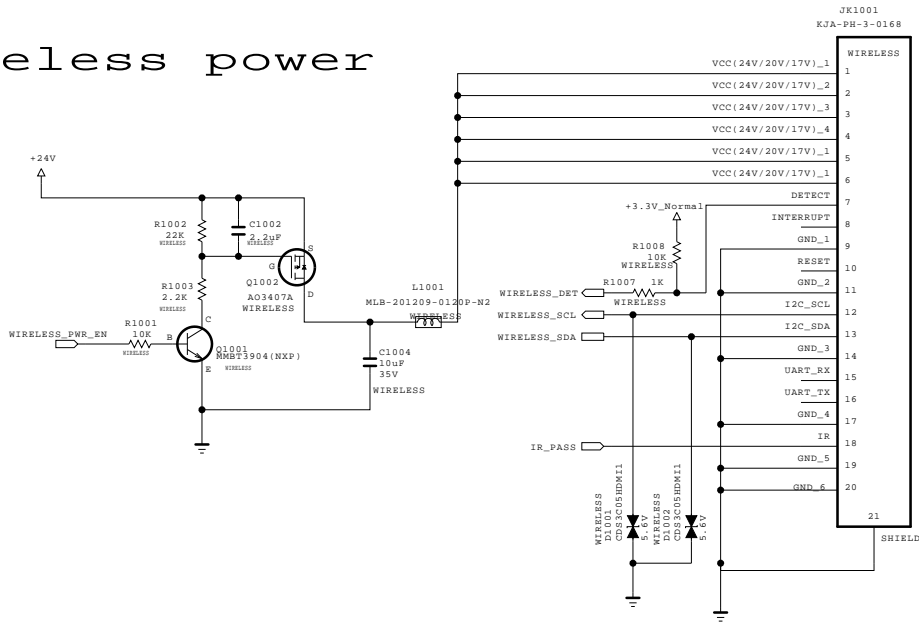Wireless power




THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FILRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.

SECRET
LGElectronics




MODEL	BCM35230	DATE	
BLOCK	WIRELESS	SHEET	10 / 50


CVBS 1 PHONE JACK

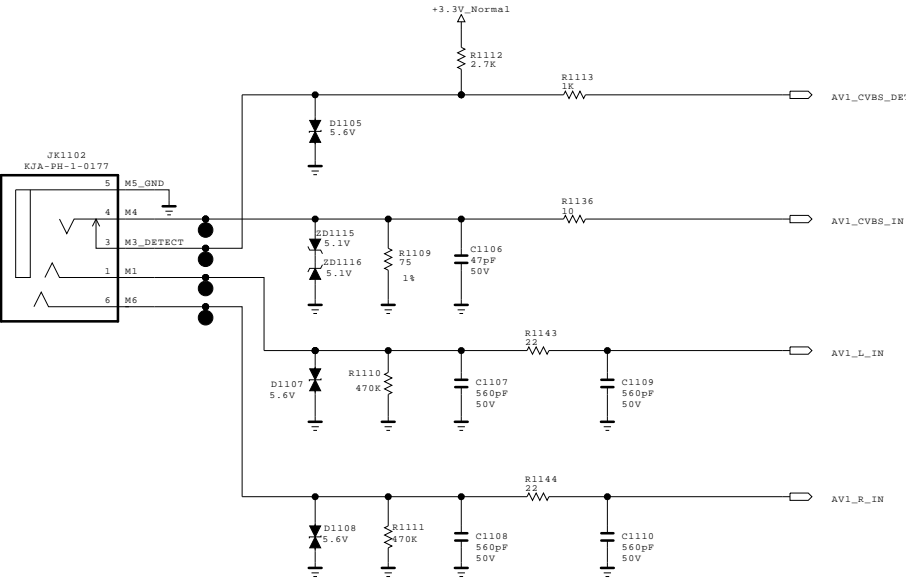


CVBS2 REAR JACK

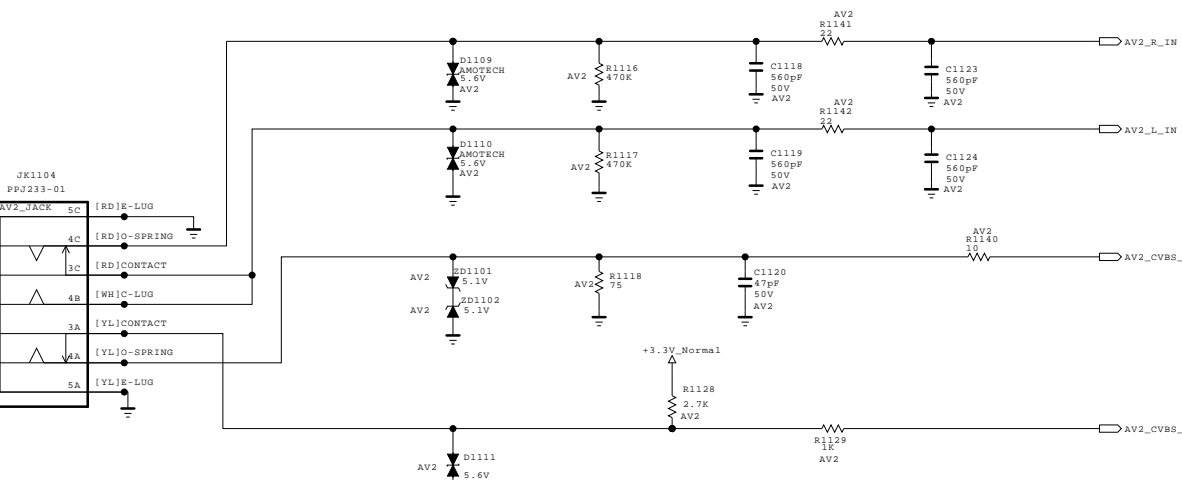

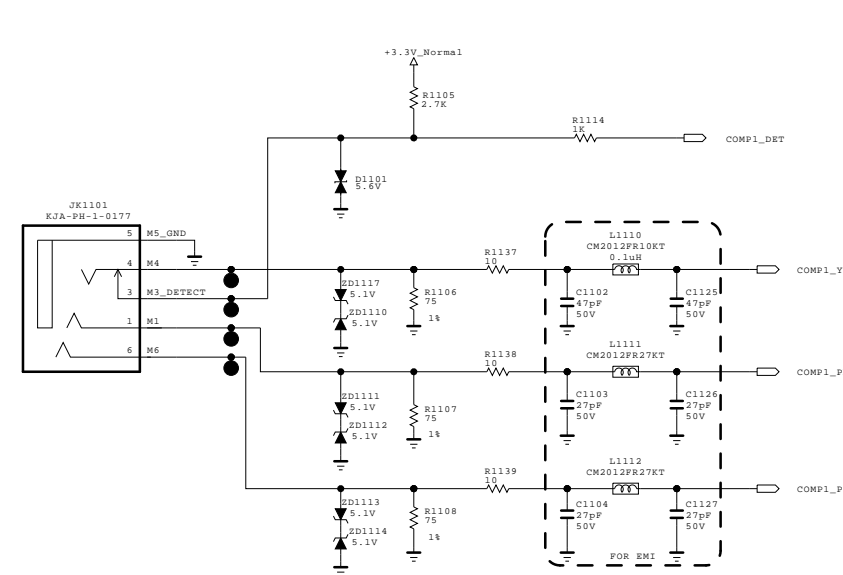

COMPONENT 1 PHONE JACK

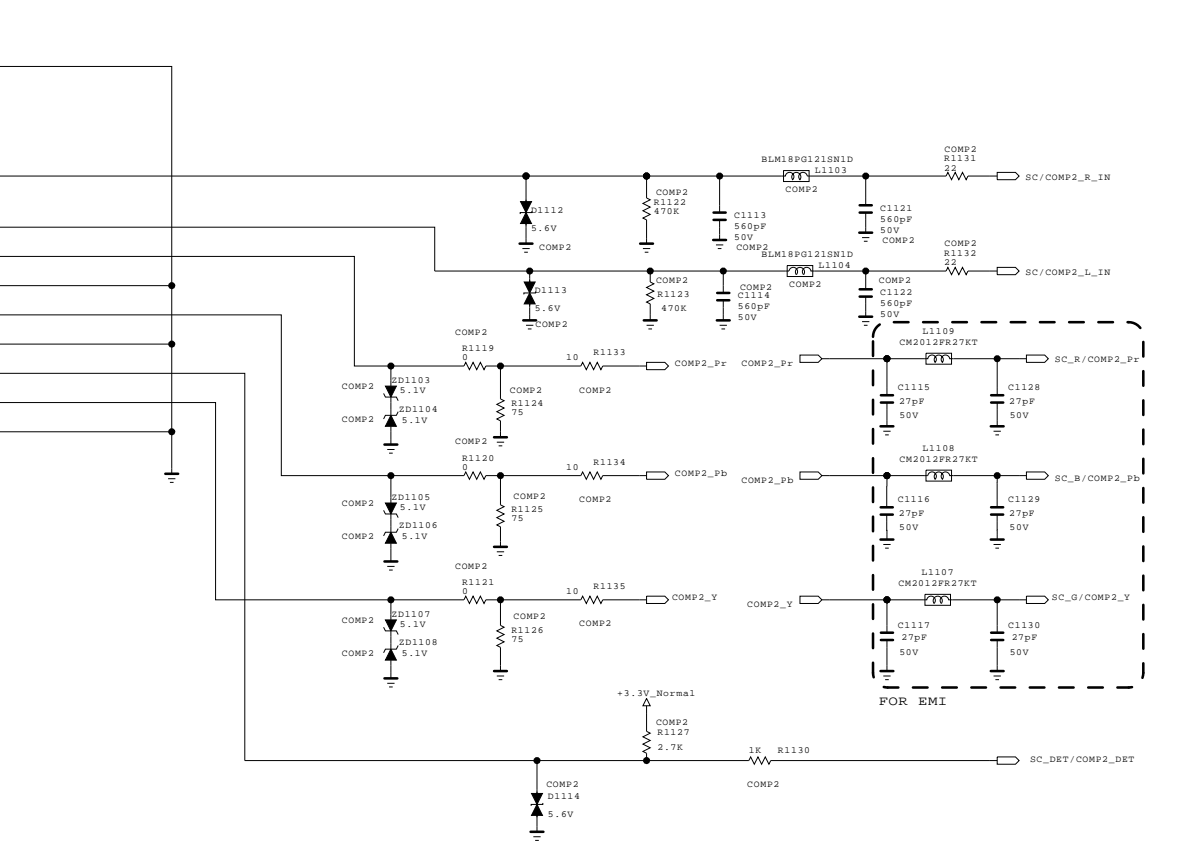

COMP2 REAR JACK





THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FILRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.

SECRET
LGElectronics



MODEL	BCM35230	DATE	
BLOCK	COMP / AV	SHEET	11

The schematic diagram illustrates the USB_WIFI circuit. It begins with a +5V_USB input. A dashed box labeled "For EMI" contains an inductor L1202 (WIFI120-ohm), a capacitor C1234 (0.1uF, 16V), and a capacitor C1233 (0.1uF, 16V). A capacitor C1232 (100uF, 16V) is connected to the WIFI line. The circuit then branches into two paths: one for DM (Differential Mode) and one for DP (Differential Pair). The DM path includes a resistor R1232 (0 ohms) and a diode D1201 (CDS3C05HDMI1, 5.6V). The DP path includes a resistor R1233 (0 ohms) and a diode D1202 (CDS3C05HDMI1, 5.6V). Both paths are connected to the P1201 12507WR-04L connector, which has pins 1 (VDD), 2 (DM), 3 (DP), 4 (GND), and 5. The GND pin is connected to a common ground.

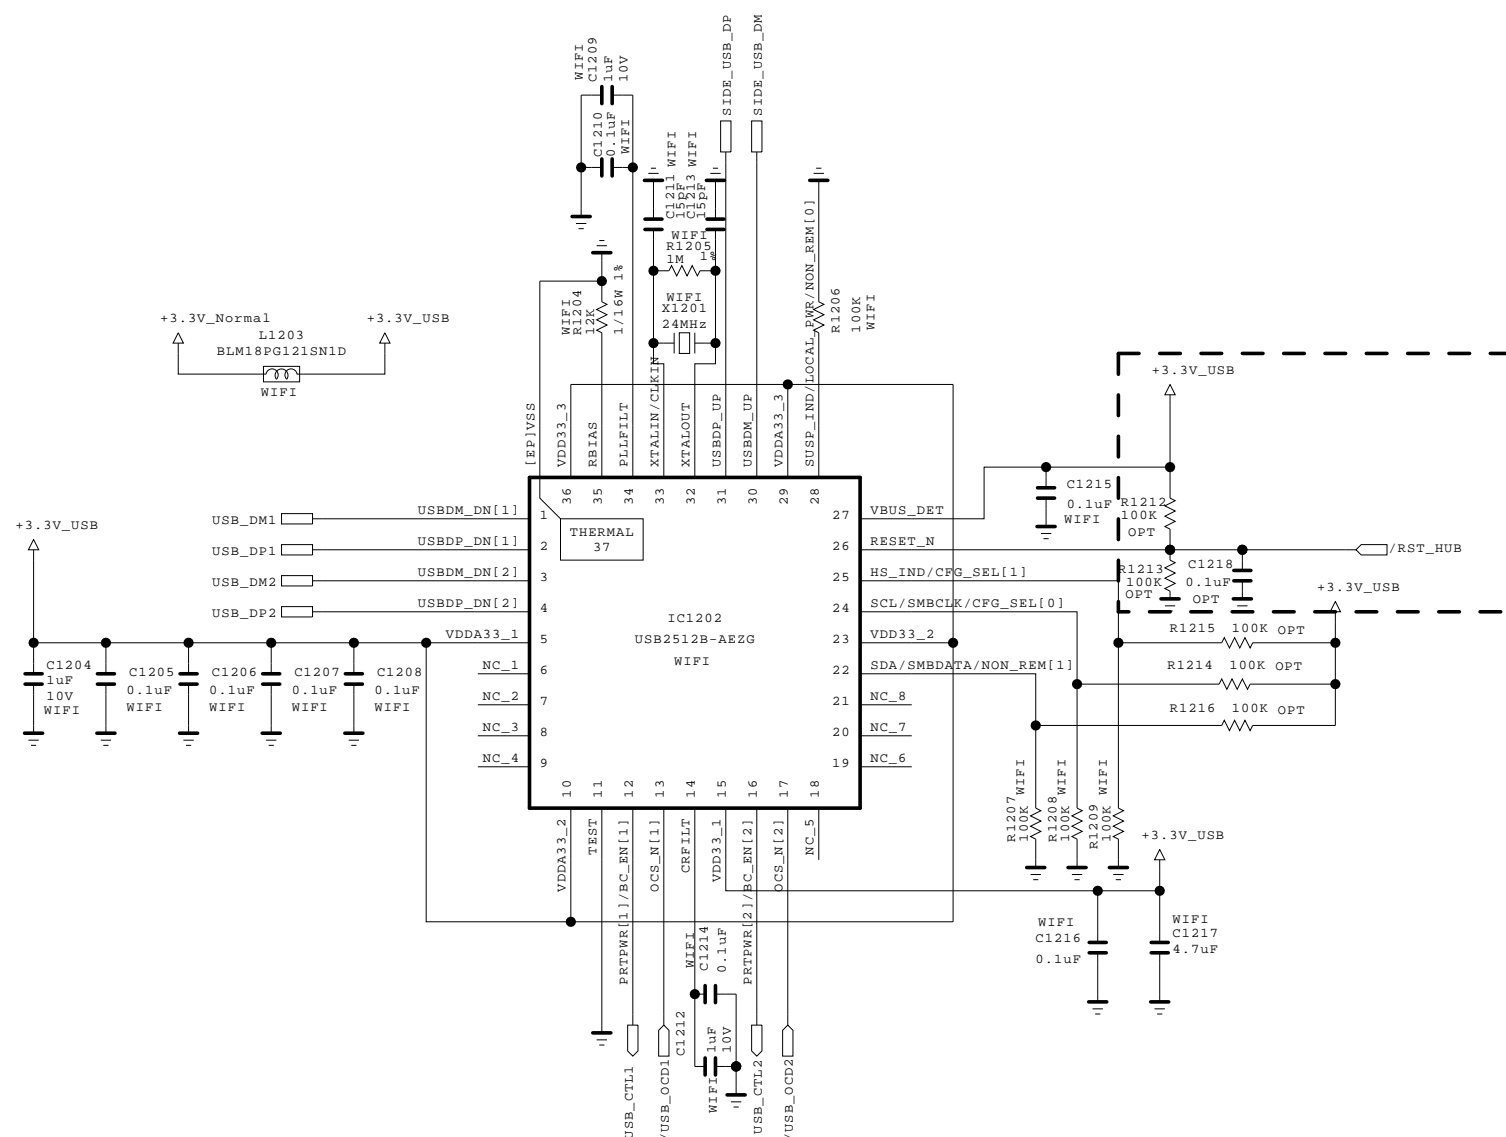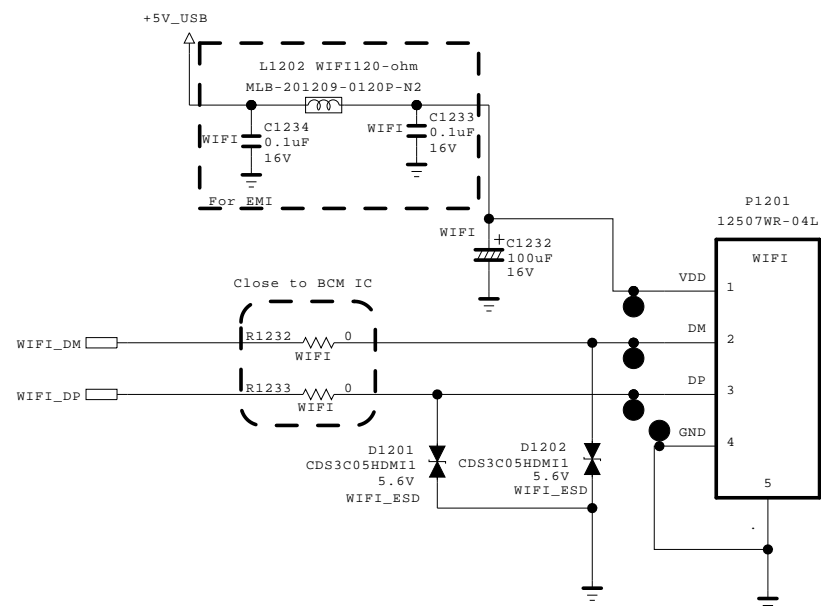

SECRET	 LG ELECTRONICS
LGElectronics	

DUAL COMPONENT	
D1201,D1202 D1203,D1204 D1205,D1206	1ST : EAH42720601 2ND : EAH60994401

[illegible]


[illegible]

SECRET
LGElectronics



Ethernet Block

DUAL COMPONENT	
D1401,D1402 D1403,D1404 D1405,D1406	1ST : EAH42720601 2ND : EAH60994401

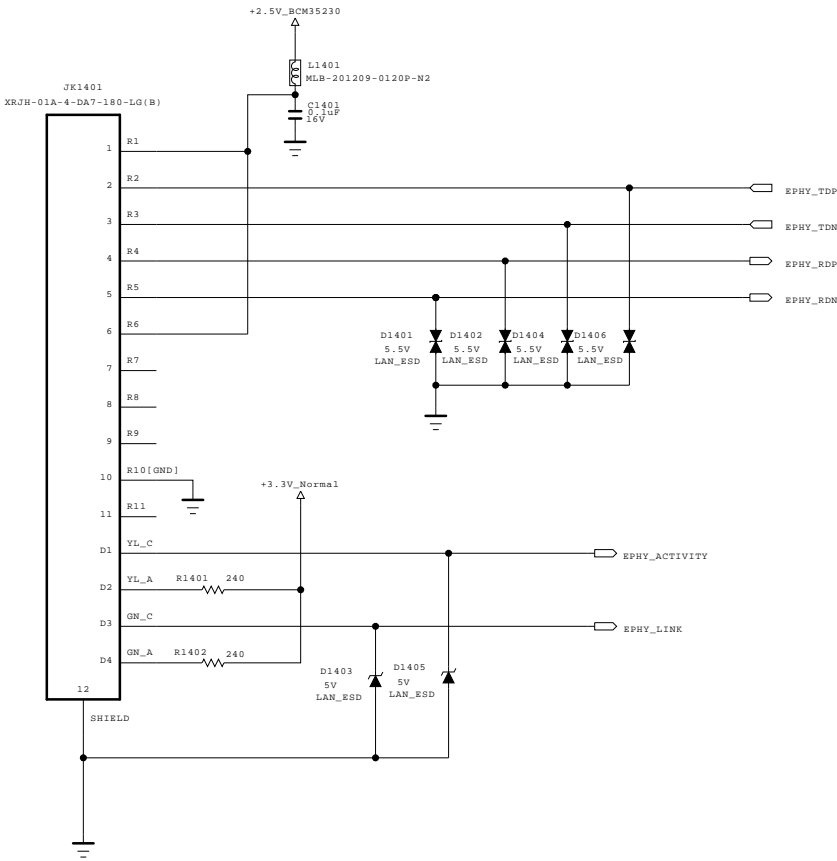


THE ⚠ SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FILRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE ⚠ SYMBOL MARK OF THE SCHEMATIC.

SECRET
LGElectronics



MODEL	BCM35230	DATE	
BLOCK	ETHERNET	SHEET	14 / 50

FHD120Hz LVDS output (51pin+41Pin)

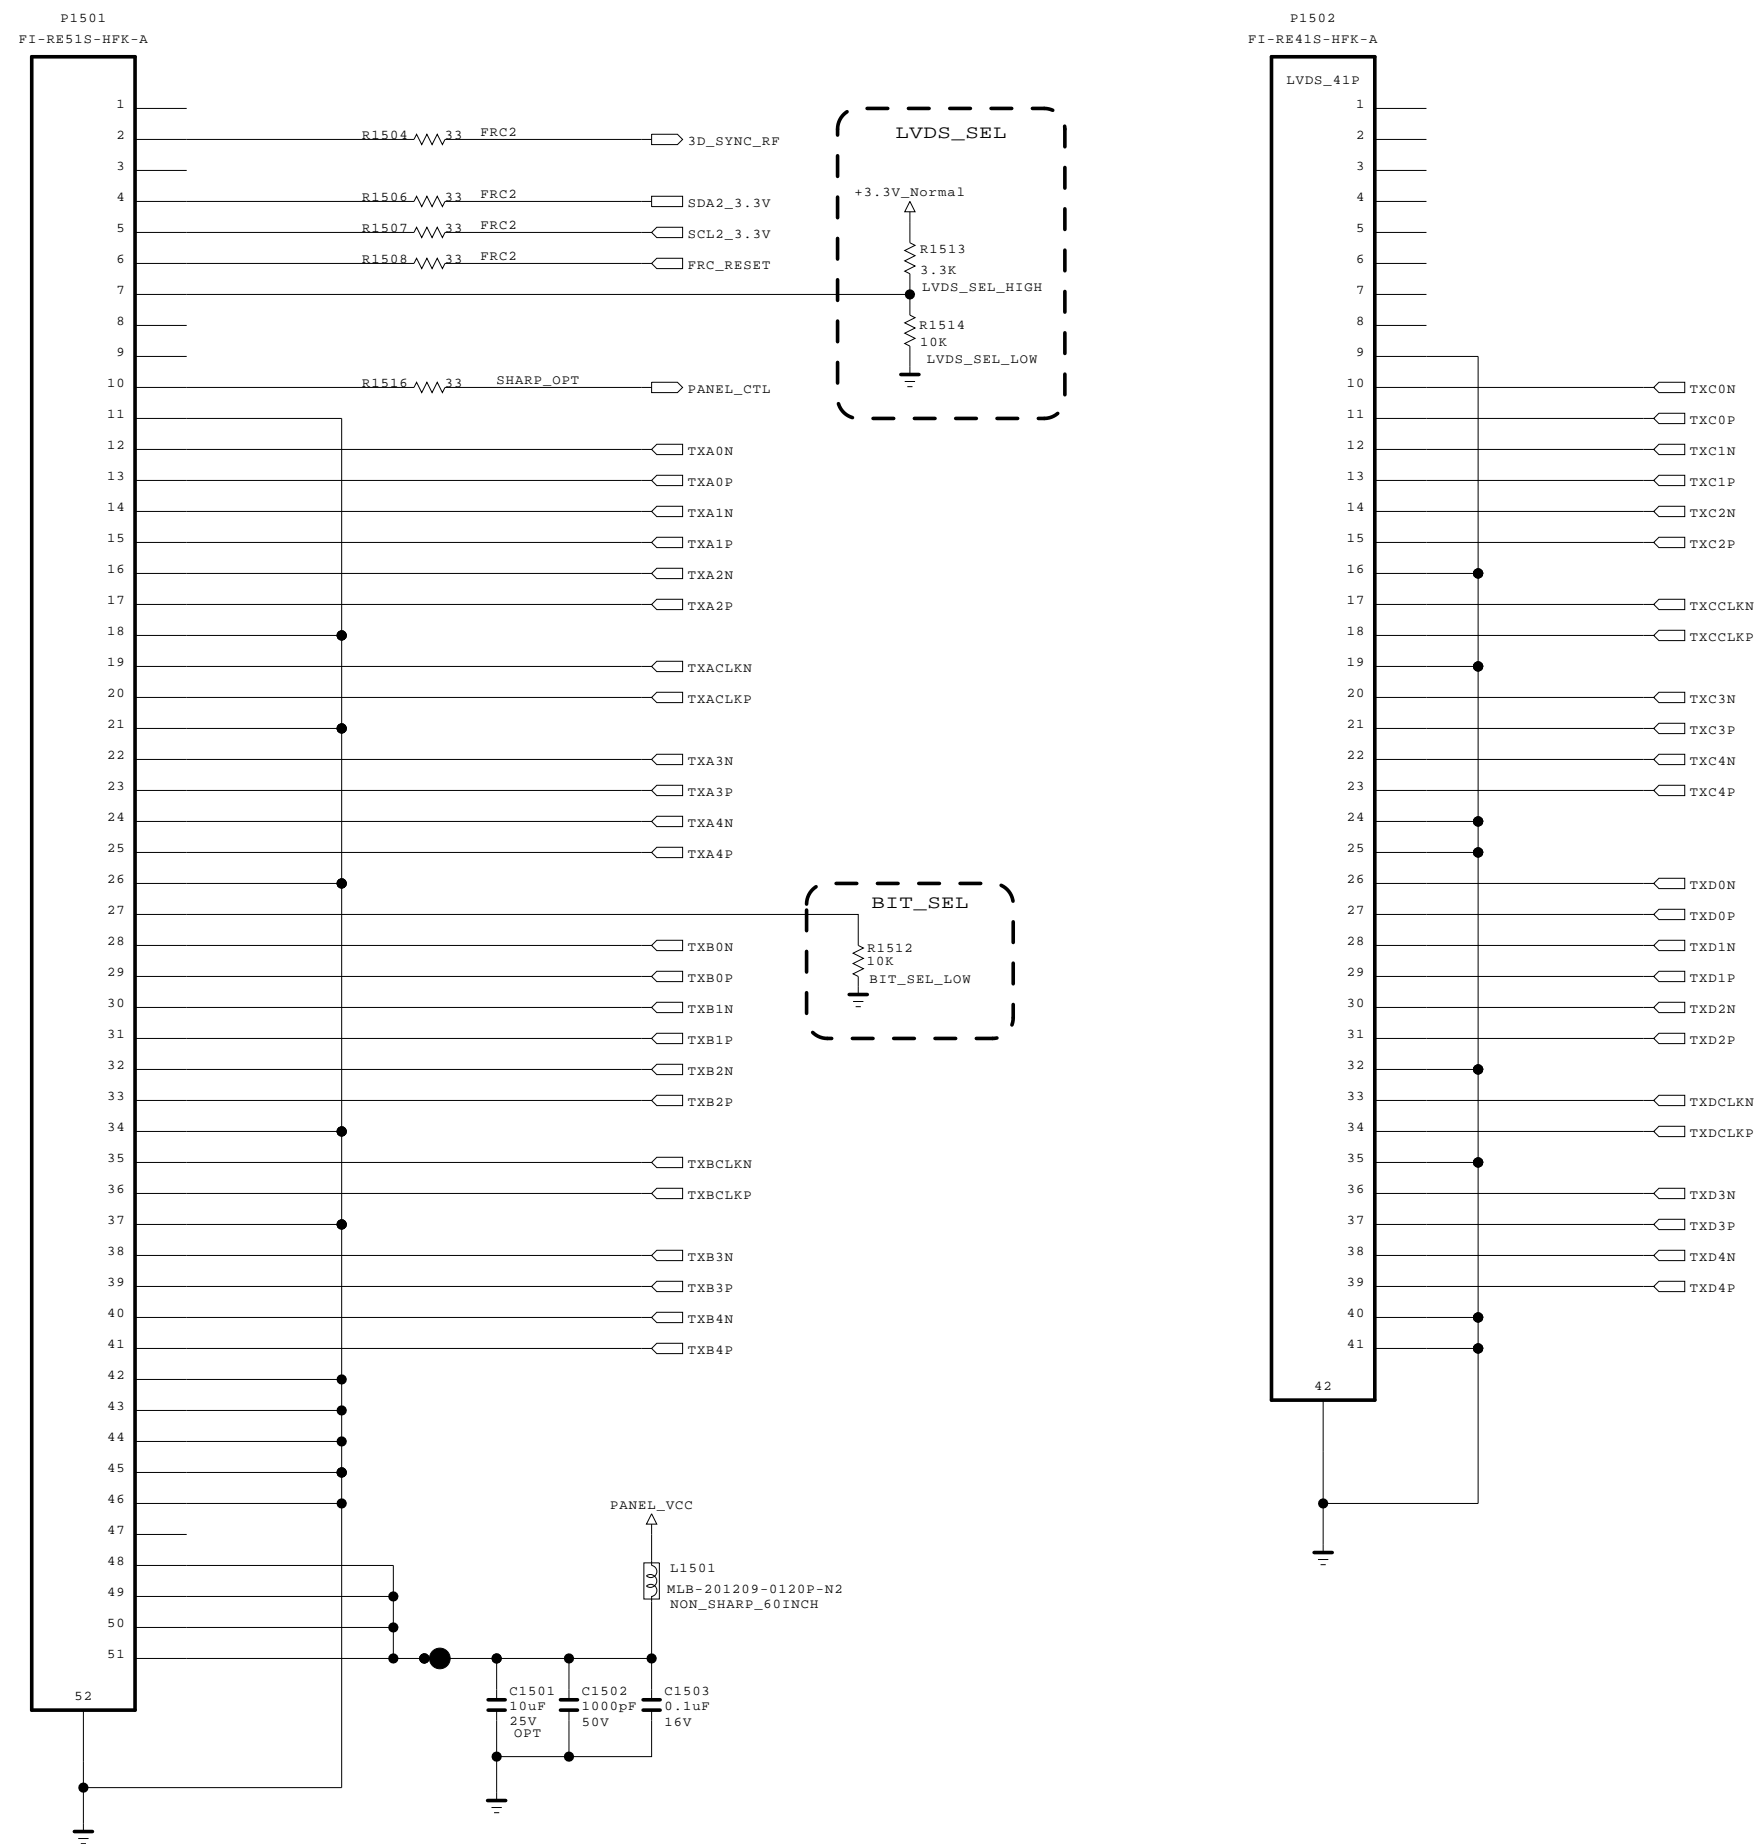

REVERSE MARK
LVDS_41P
C1504
2.2uF
50V

THE ⚠ SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FILRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE ⚠ SYMBOL MARK OF THE SCHEMATIC.


SECRET



LGElectronics

LG ELECTRONICS

MODEL	BCM35230	DATE	2010.11.03
BLOCK	LVDS	SHEET	15 / 50

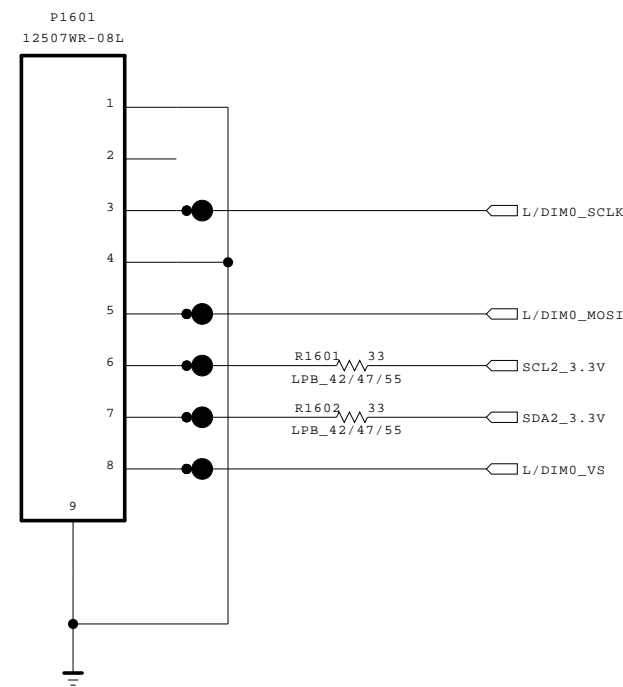
[Local Dimming Block]




THE  SYMBOL MARK OF THIS SCHEMETIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FILRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFATURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMETIC.



SECRET	 LG ELECTRONICS
LGElectronics	

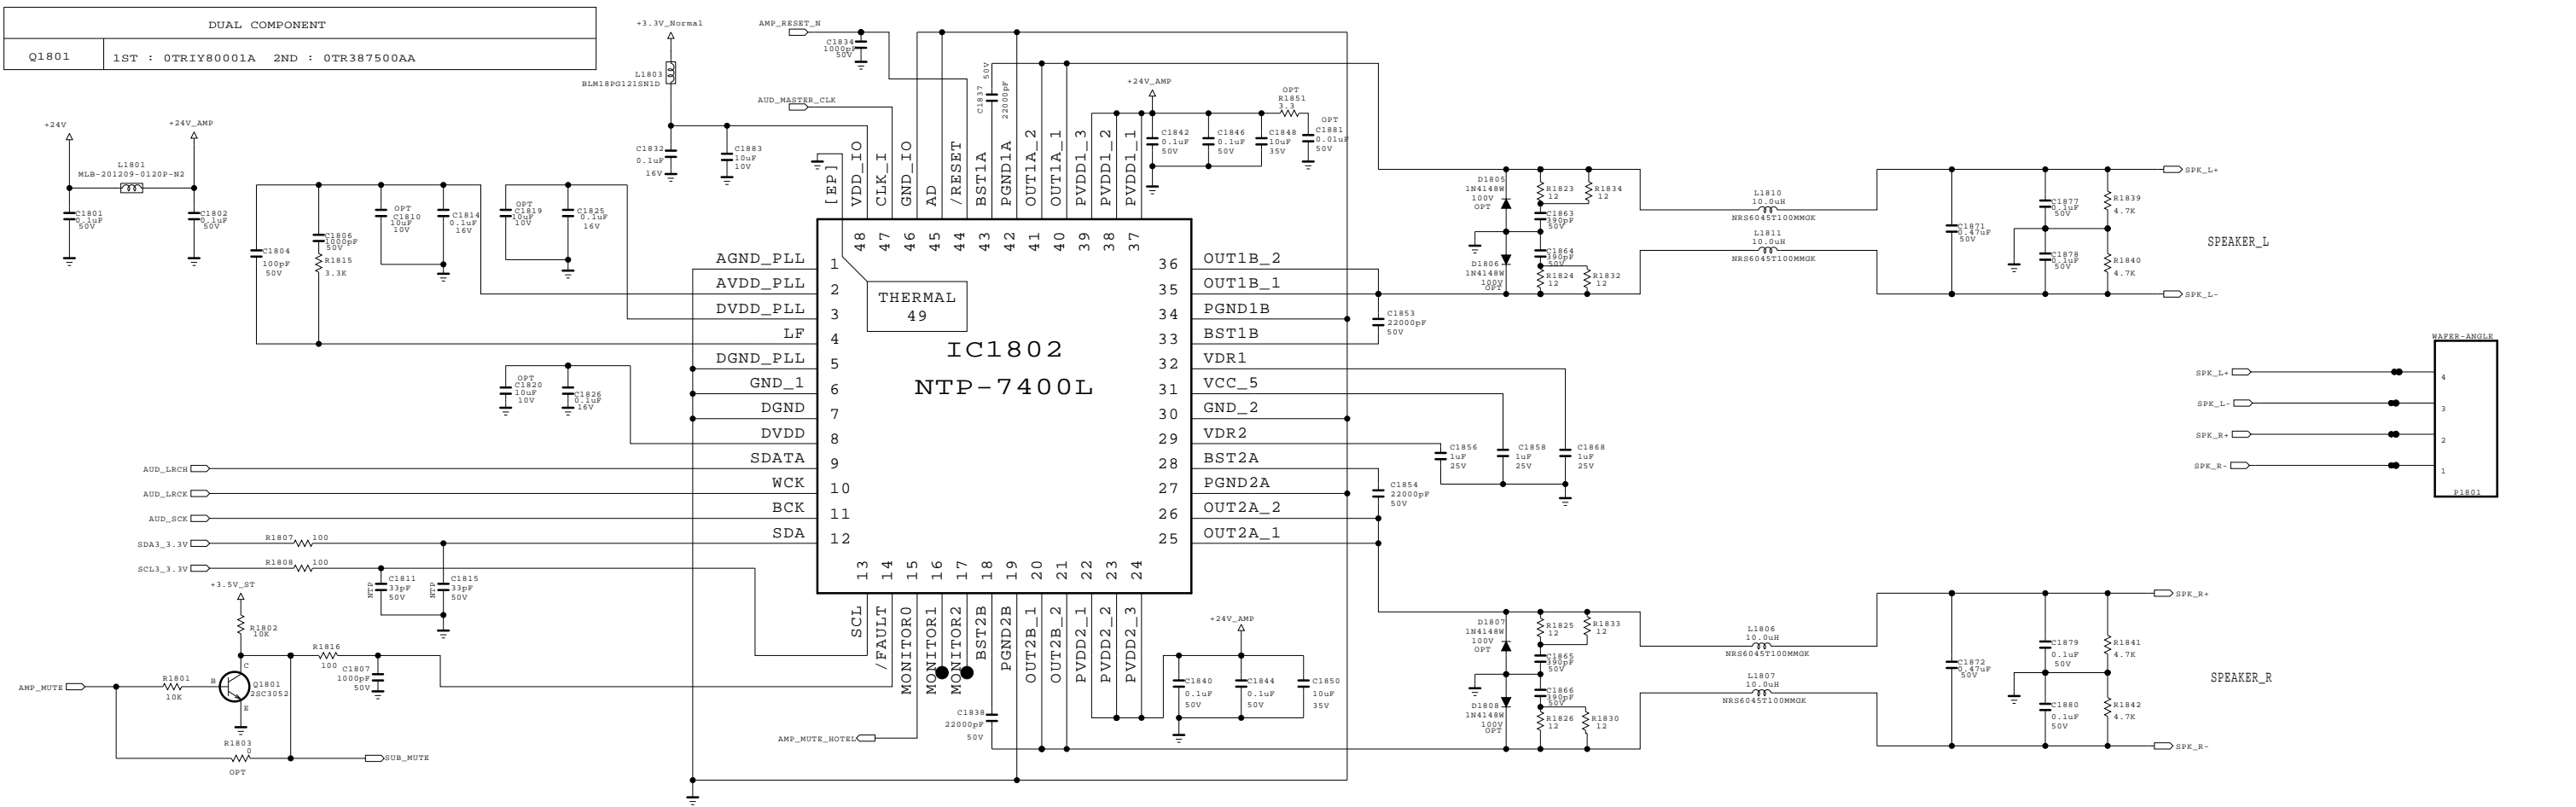MODEL	BCM35230	DATE	
BLOCK	L_DIMMING	SHEET	16 / 50

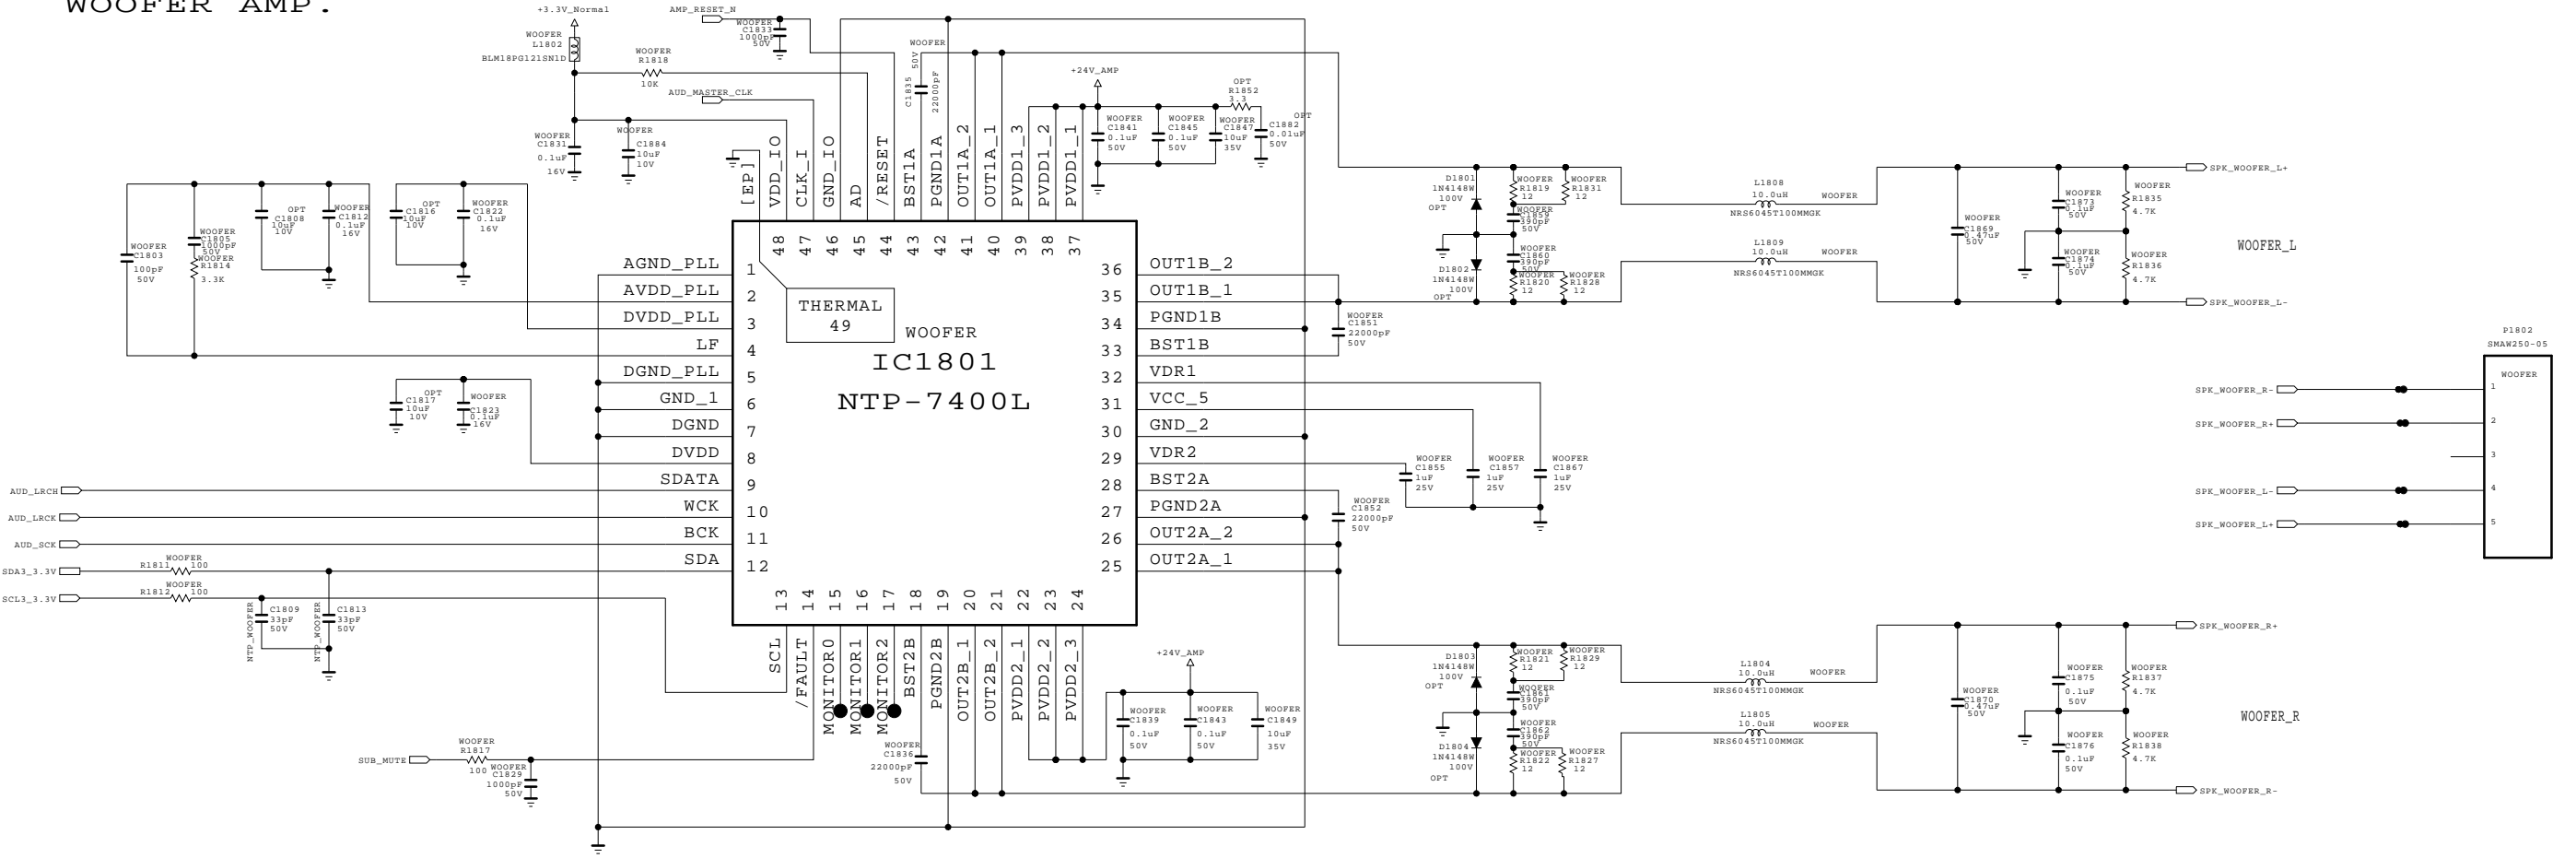

WOOFER AMP .







THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FILRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.


SECRET
LGElectronics



MODEL	BCM35230	DATE	
BLOCK	AUDIO[NEO]	SHEET	18 / 50

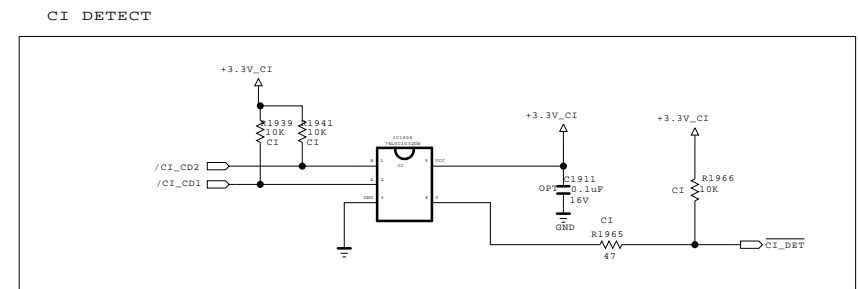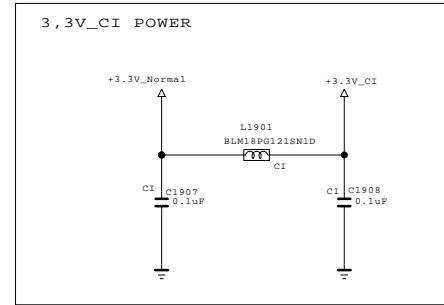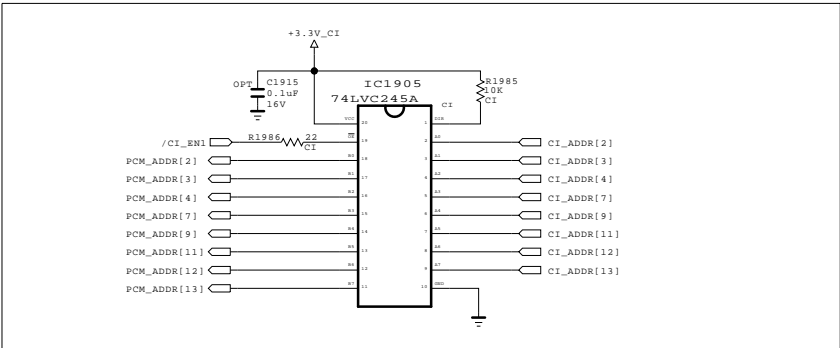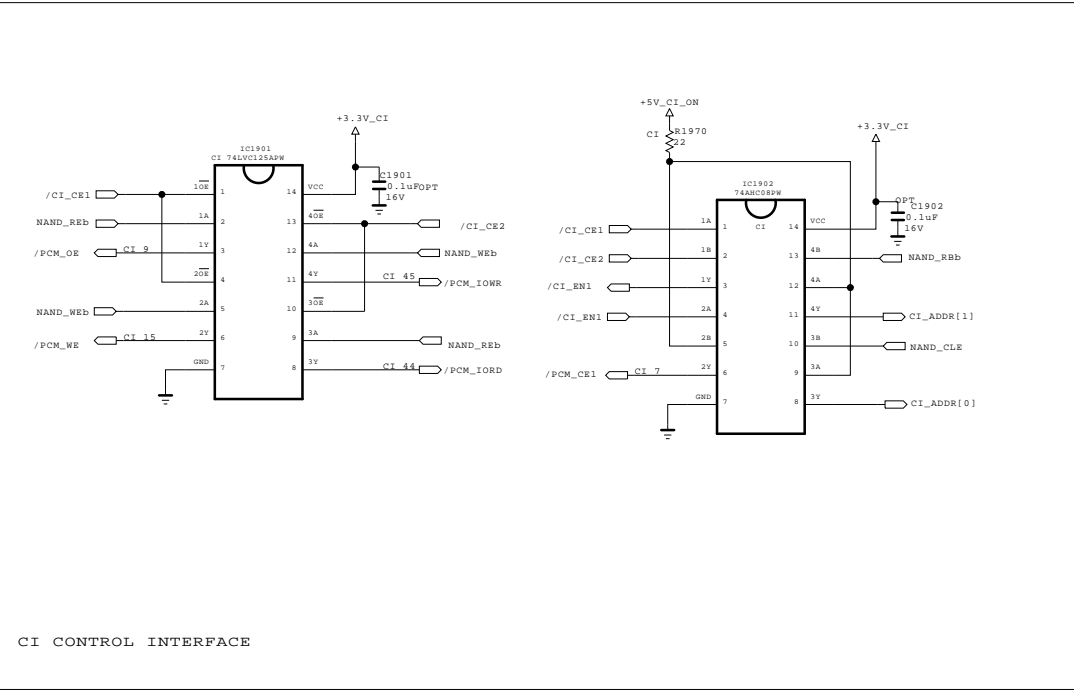


SECRET
LGElectronics



OPTION TABLE							
H/NIM (EU)	H/NIM (AU, Latin)	H/NIM (Brazil, Taiwan)	F/NIM_T/C	F/NIM_T2	F/NIM_CN (China)	F/NIM_Brazil (Brazil)	DVB-T/C/S2 (Eu, Asia)
Non_DVB_S	Non_DVB_S	Non_DVB_S	Non_DVB_S	Non_DVB_S	Non_DVB_S	Non_DVB_S	DVB_S
H/NIM	H/NIM	H/NIM	F/NIM	F/NIM	F/NIM	F/NIM	F/NIM
BOOSTER	BOOSTER	BOOSTER	BOOSTER	BOOSTER	BOOSTER	BOOSTER	SCART
		RF_SW_CTL			RF_SW_CTL	RF_SW_CTL	
SCART			SCART	SCART	CN		
			EU_F/NIM	EU_F/NIM	CN_F/NIM_BR	CN_F/NIM_BR	TC_S_F/NIM

NON_DVB_S: use H/NIM and F/NIM
DVB_S: use DVB-T/C/S2 combo Tuner
H/NIM: use H/NIM
F/NIM: use F/NIM and DVB-T/C/S2 combo Tuner
SCART: use Scart Jack
CN : use China F/NIM
BOOSTER: use BOOSTER_CTL
RF_SW_CTL: use RF_SWITCH_CTL
TC_S_F/NIM: use EU_DVB-T/C F/NIM
CN_F/NIM_BR: use F/NIM(China, BRZIL)
EU_F/NIM: use EU_F/NIM

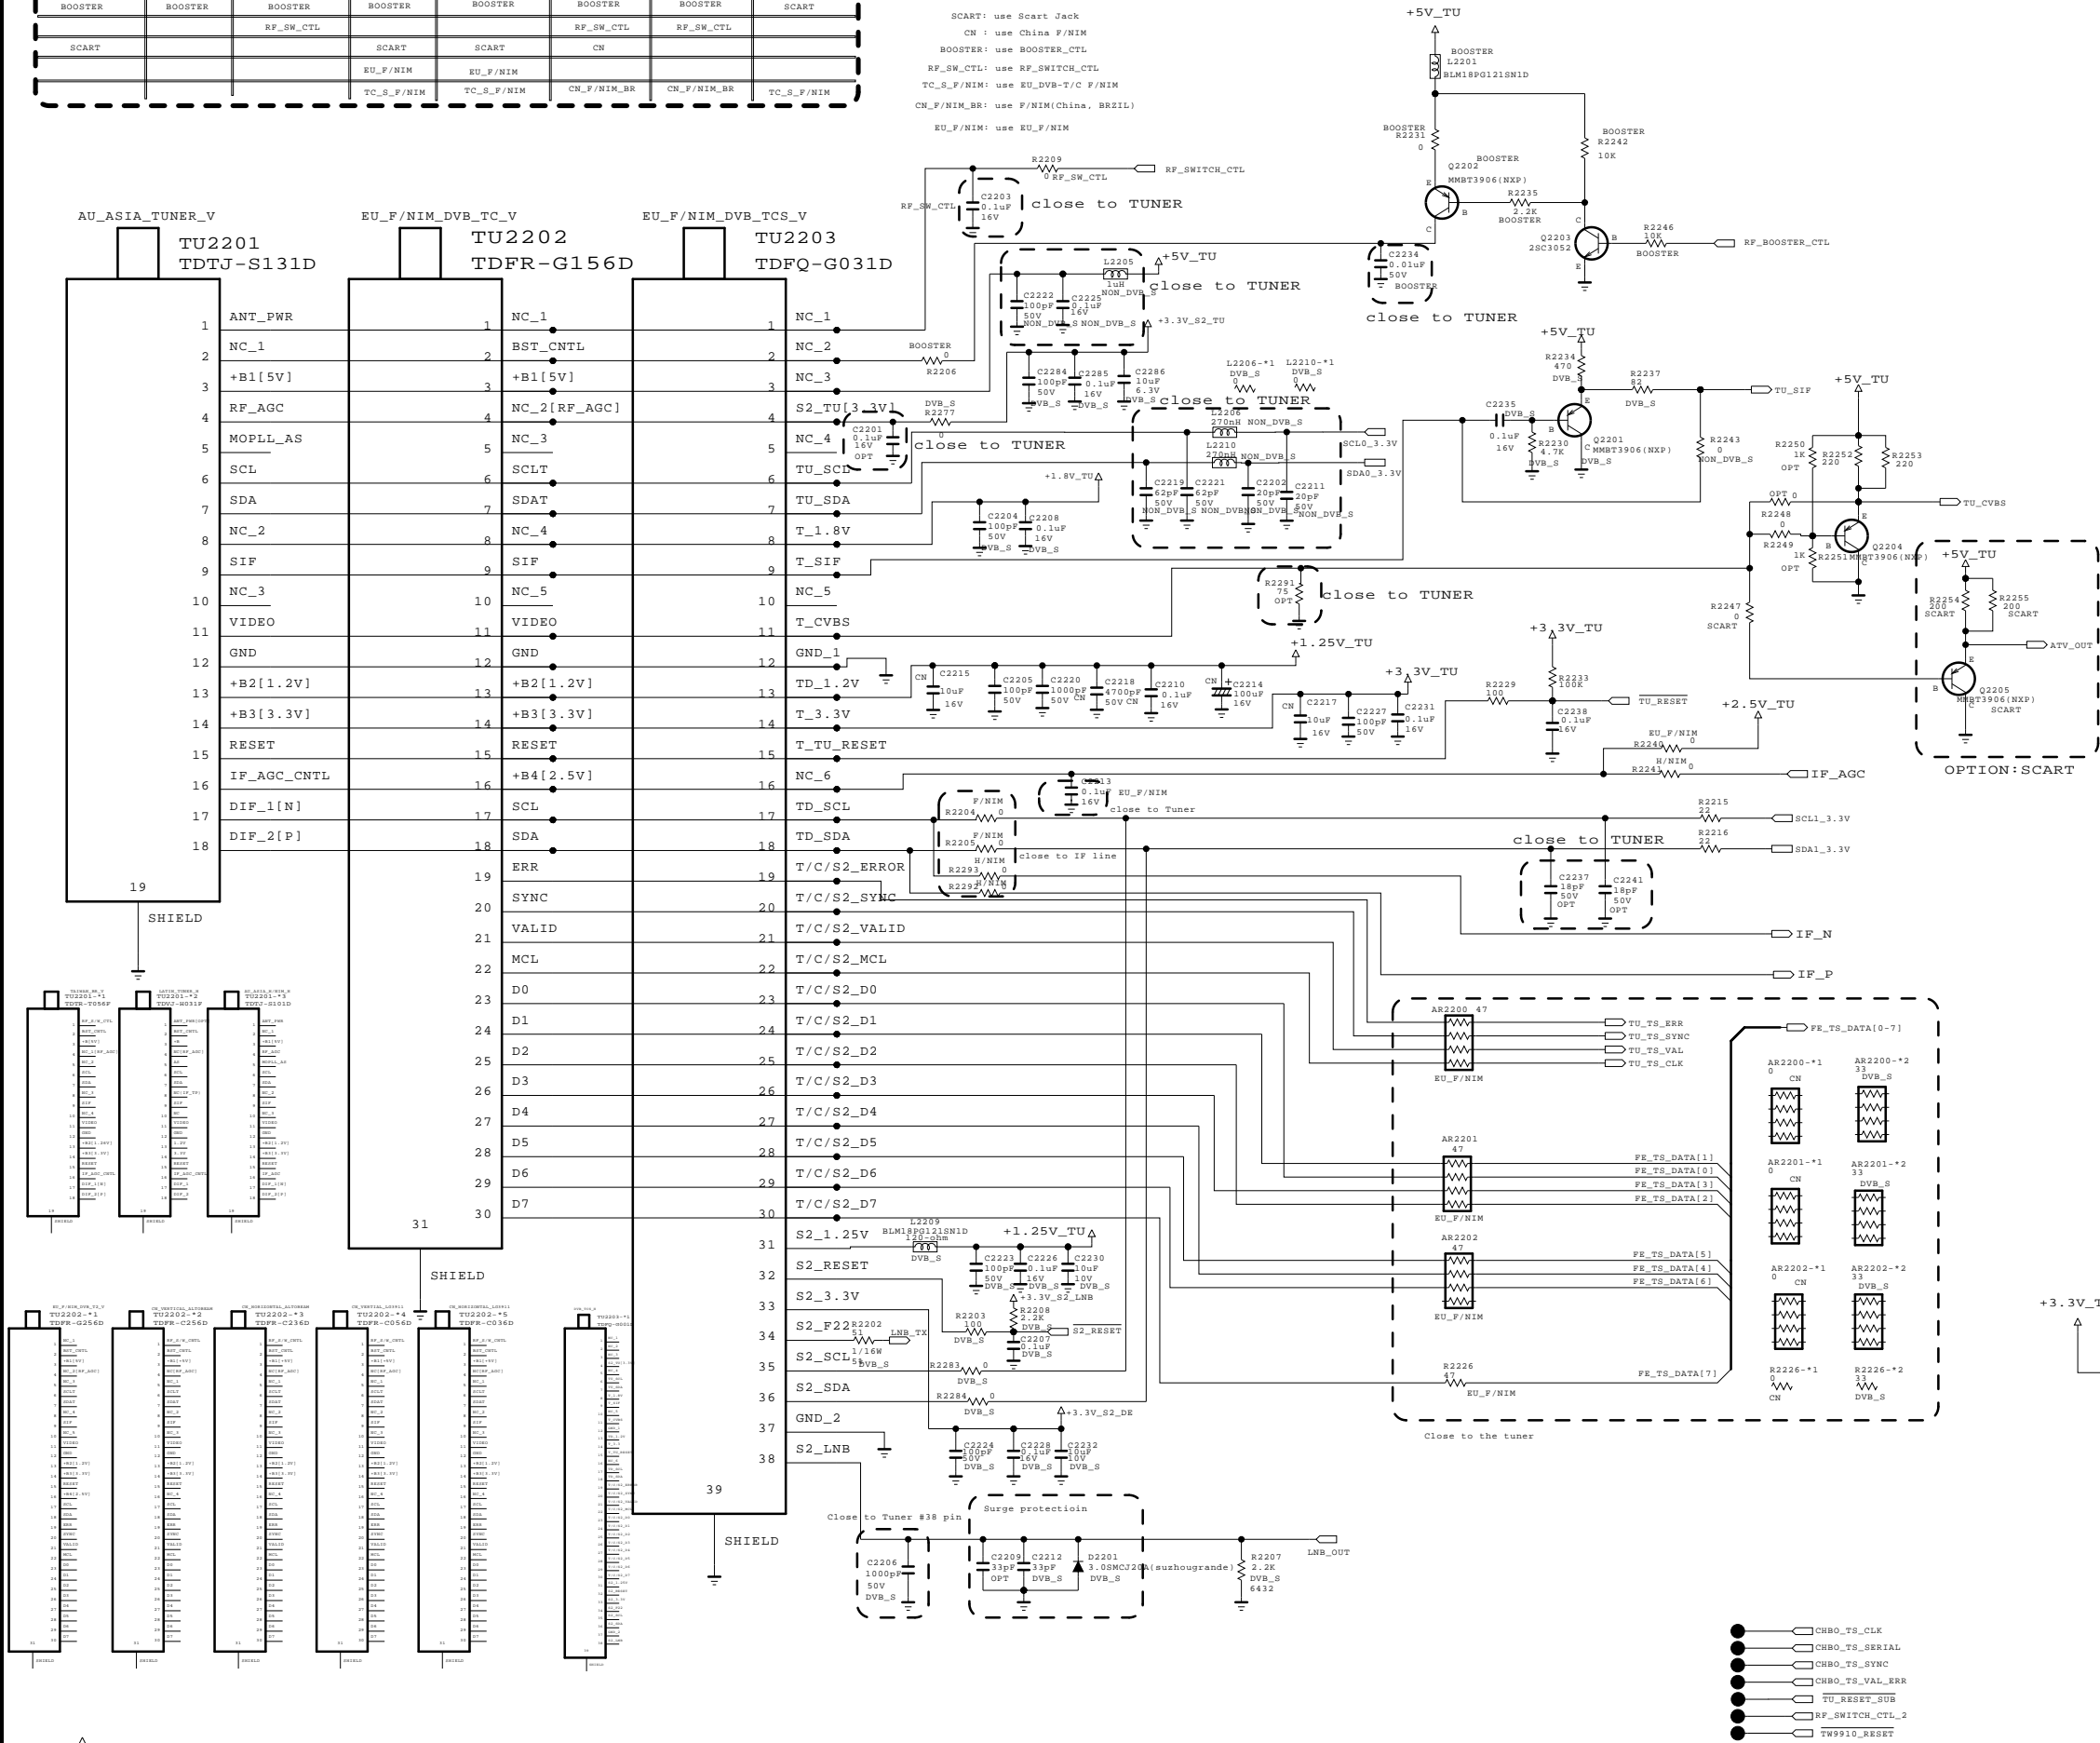




THE SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FILTRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE SYMBOL MARK OF THE SCHEMATIC.

SECRET
 LG Electronics

LG ELECTRONICS

H/NIM & F/NIM & T/C/S2 Combo Tuner


DUAL COMPONENT	
IC2204	1ST:T-AP2114H(EAN61573601) / 2ND:T-TJ3940S (EAN61573501)

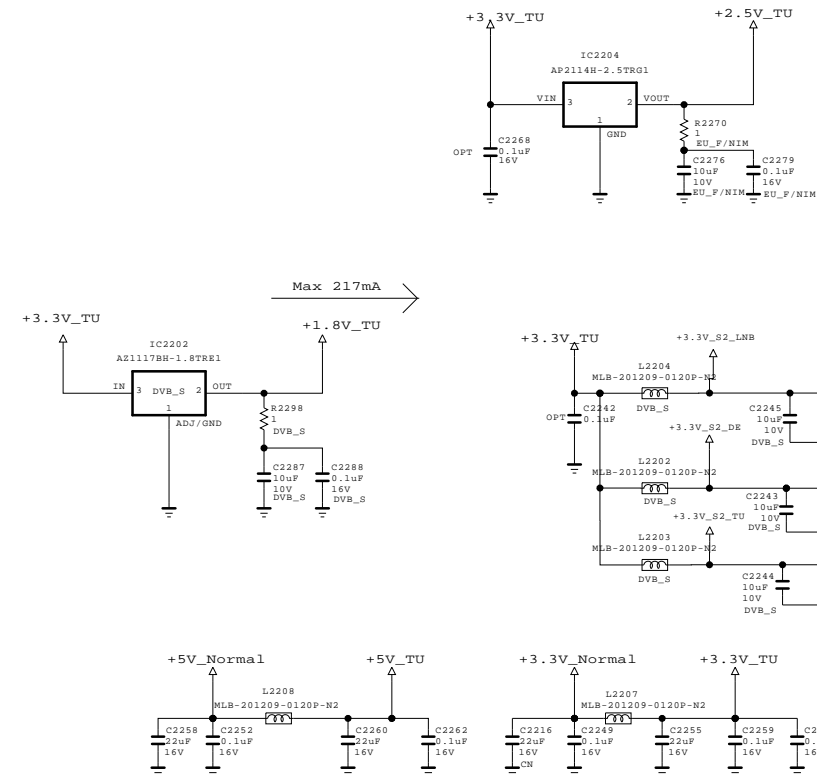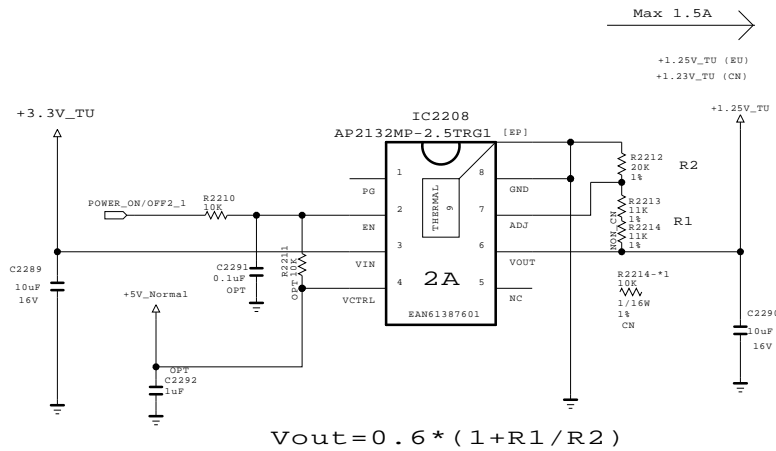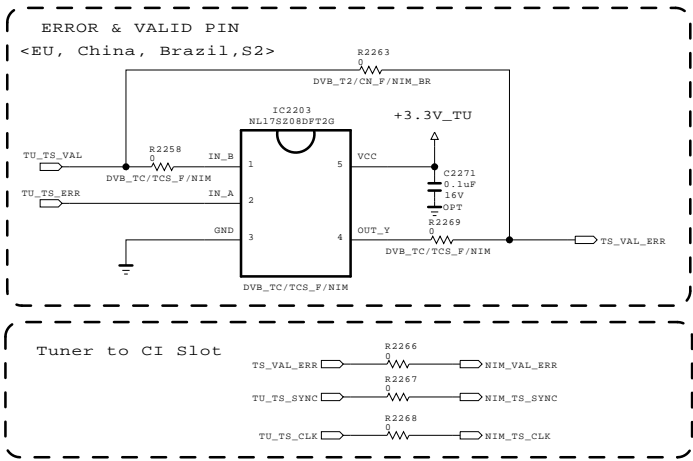

MODEL	BCM35230	DATE	
BLOCK	TUNER SINGLE	SHEET	22


DVB-S2 LNB Part Allegro

(Option:LNB)

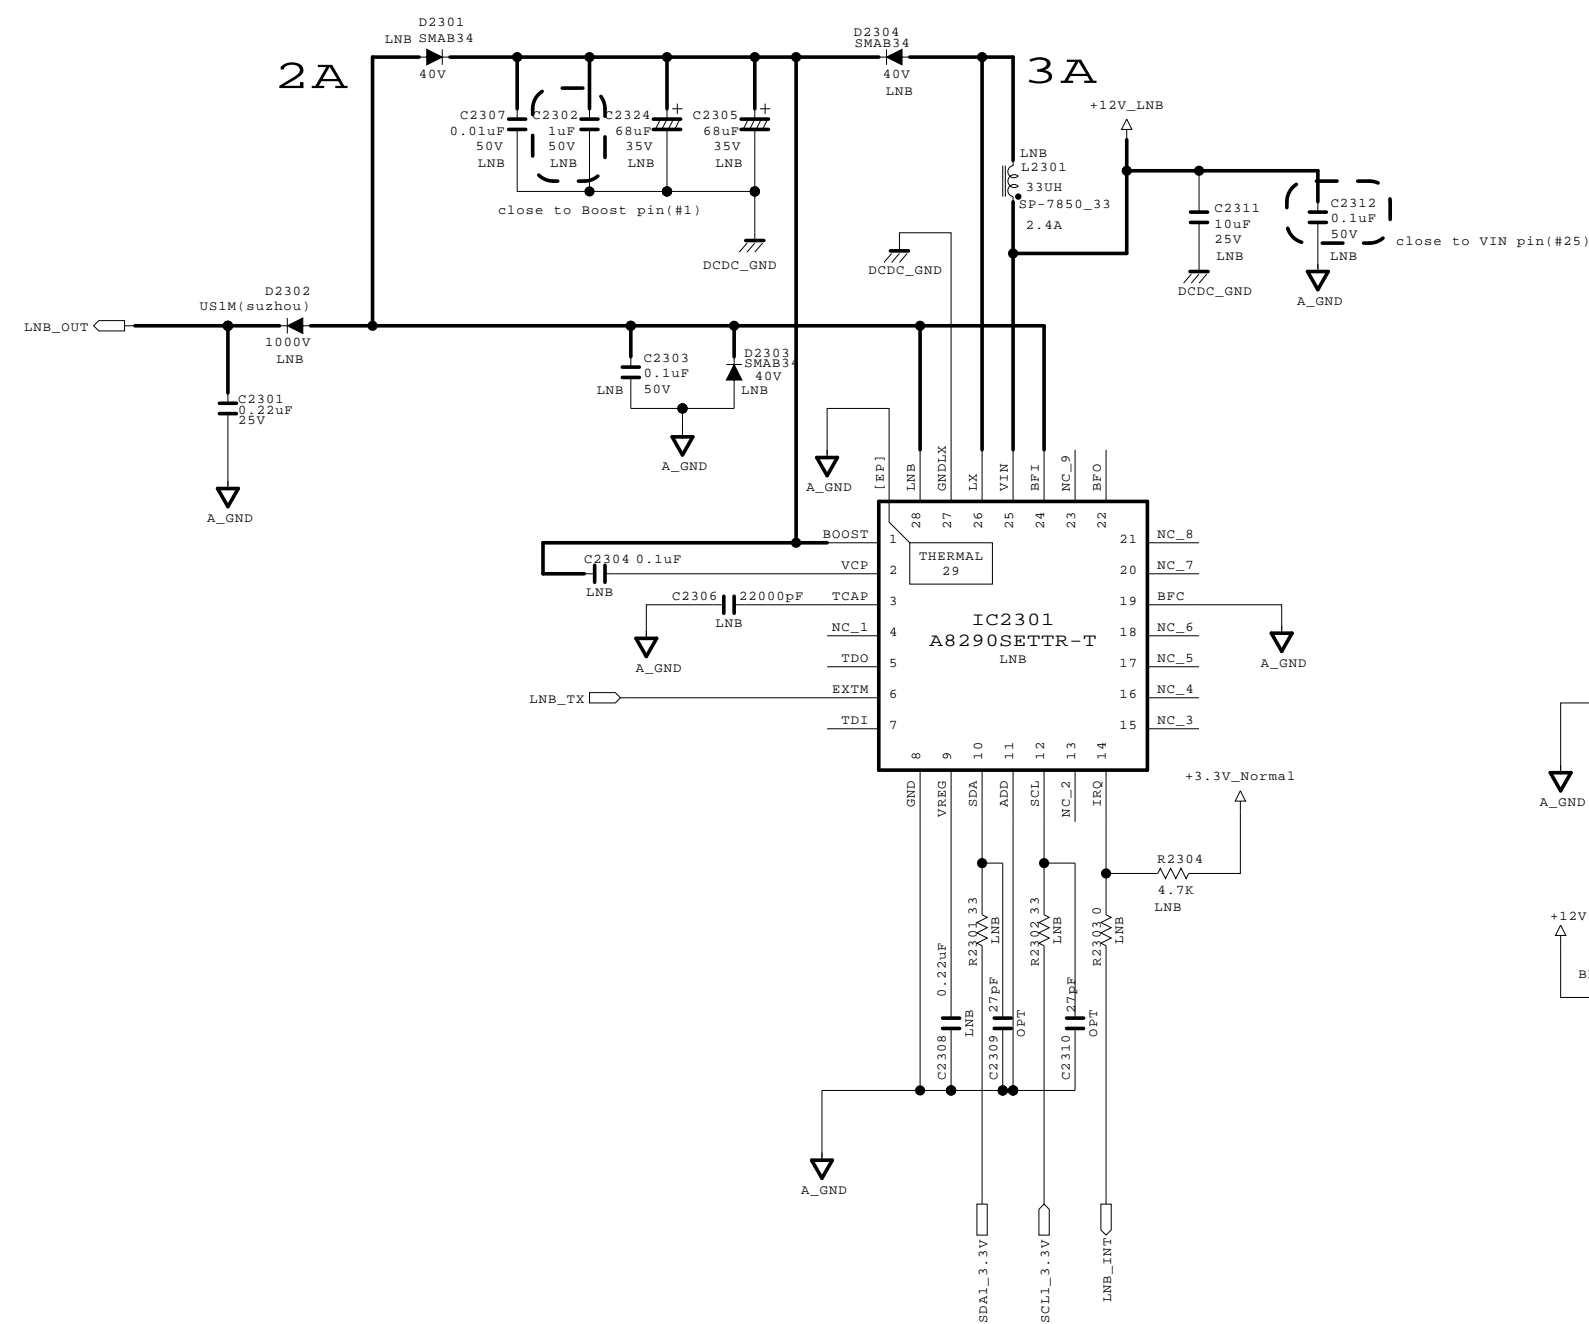

DCDC_GND and A_GND are connected
DCDC_GND and A_GND are connected in pin#27
PCB_GND and A_GND are connected

Input trace widths should be sized to conduct at least 3A
Ouput trace widths should be sized to conduct at least 2A

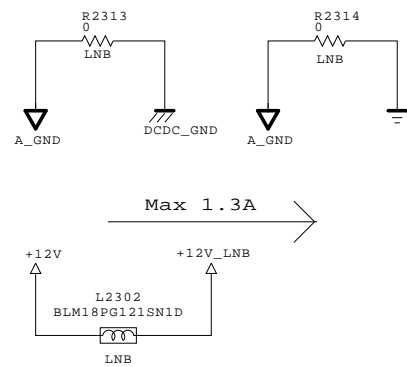

THE ⚠ SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FILRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE ⚠ SYMBOL MARK OF THE SCHEMETIC.

SECRET



LGElectronics

LG ELECTRONICS


MODEL	BCM35230	DATE	2010.11.02
BLOCK	LNB	SHEET	23 / 57

DUAL COMPONENT	
Q2502, Q2503 Q2504, Q2506 Q2507, Q2508	1ST : 0TRIY80001A 2ND : 0TR387500AA
Q2501	1ST : EBK61012701, 2ND : EBK58172301
Q2505	1ST : 0TRIH80004A, 2ND : EBK61012501, 3RD : 0TR102009AM
D2513	1ST : T-BAT54_SUZHO, 2ND : ODS0N00138A


Full Scart (18 Pin Gender)

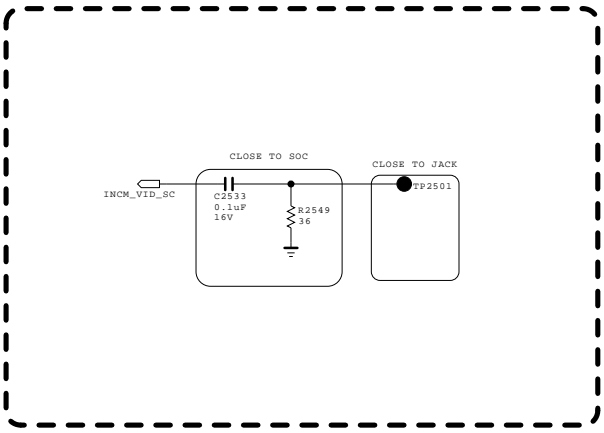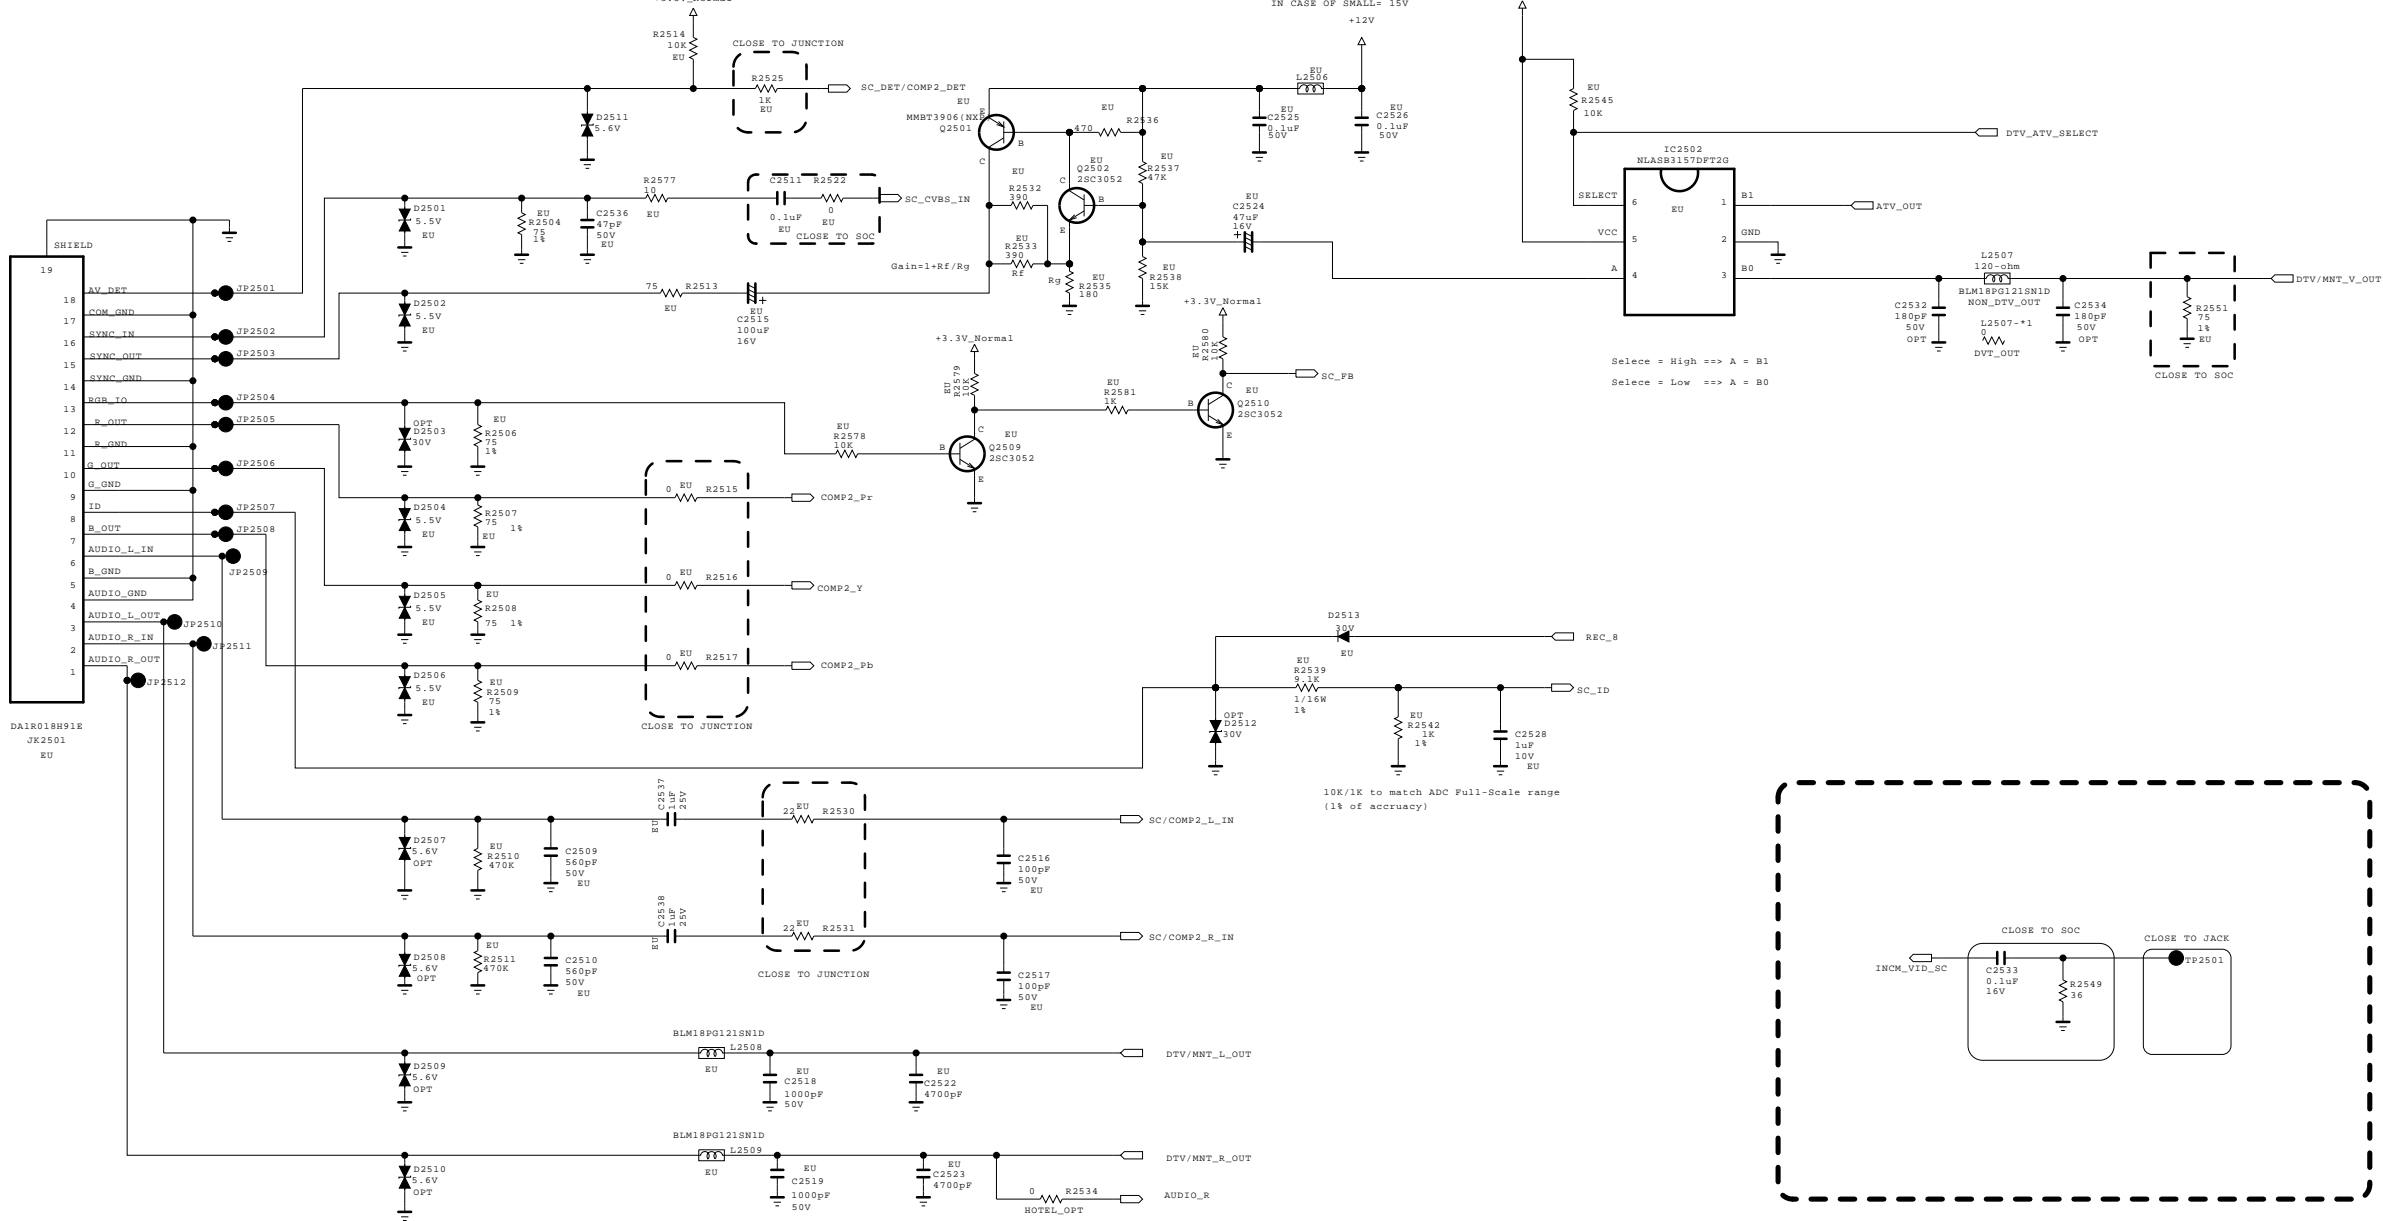


AUD_OUT >> EU/CHINA_HOTEL_OPT

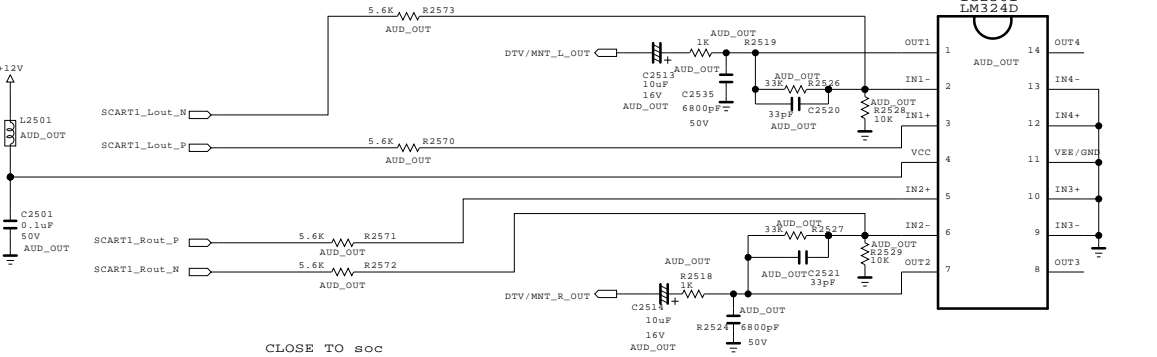

[SCART AUDIO MUTE]

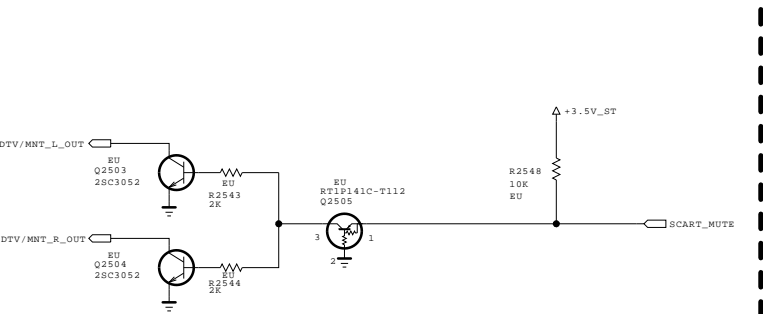

[SCART PIN 8]

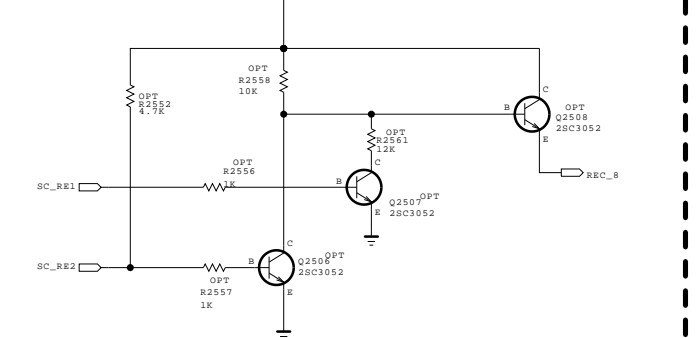


THE ⚠ SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FILRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE ⚠ SYMBOL MARK OF THE SCHEMATIC.



SECRET
LGElectronics



MODEL	BCM35230	DATE	
BLOCK	SCART	SHEET	25

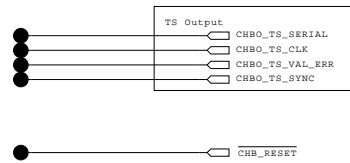NON CHB



THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FILRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.


SECRET
LGElectronics





MODEL	BCM35230	DATE	
BLOCK	NON CHB	SHEET	28 / 50

China Hotel Option

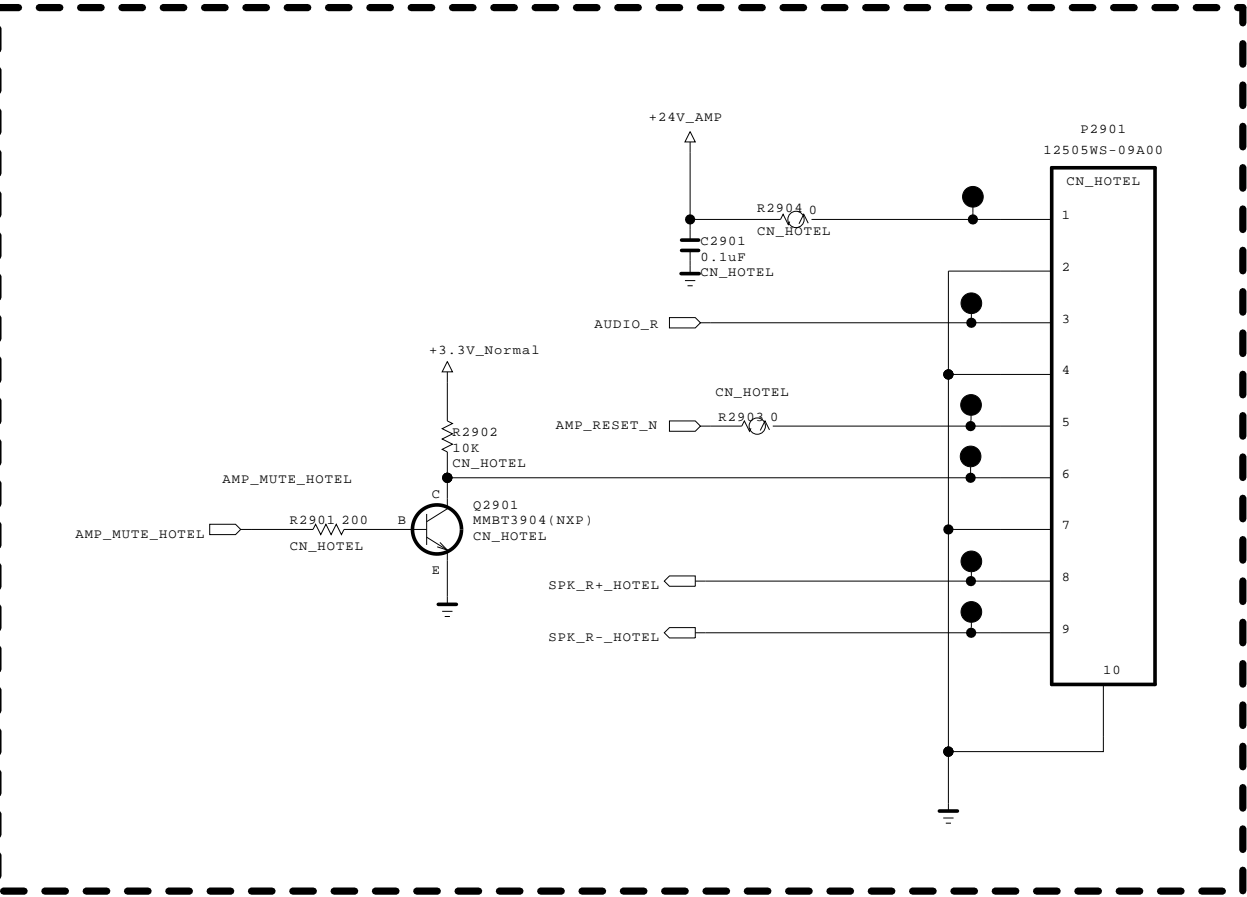DUAL COMPONENT	
Q2901	1ST : EBK61012601 2ND : 0TRDI80002A




THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FILRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFATURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.



SECRET

LGElectronics

 LG ELECTRONICS

MODEL	BCM35230	DATE	
BLOCK	CHINA HOTEL	SHEET	29 /











THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FILRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.



SECRET
LGElectronics



MODEL	BCM35230	DATE	
BLOCK	NON URSA	SHEET	36 / 50

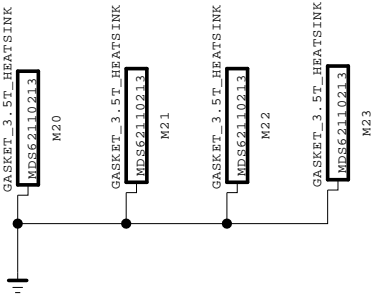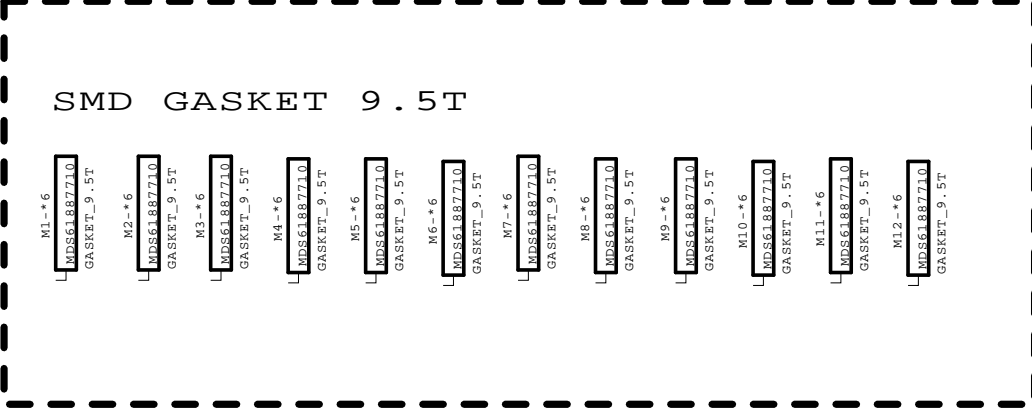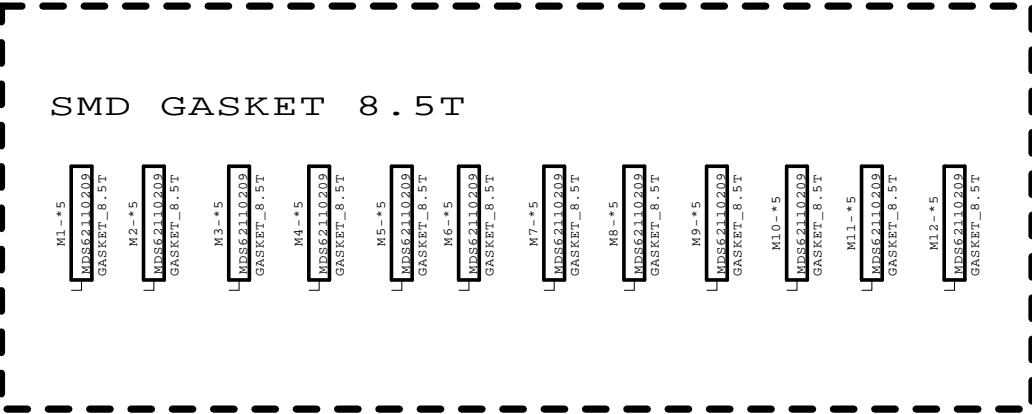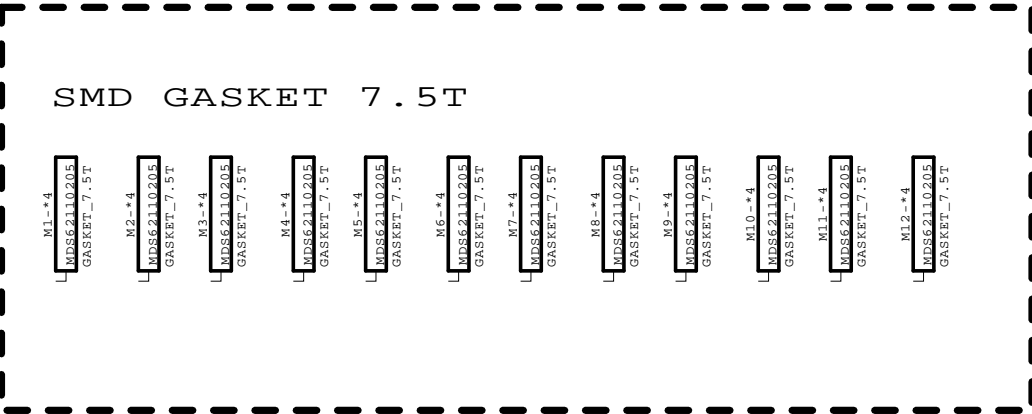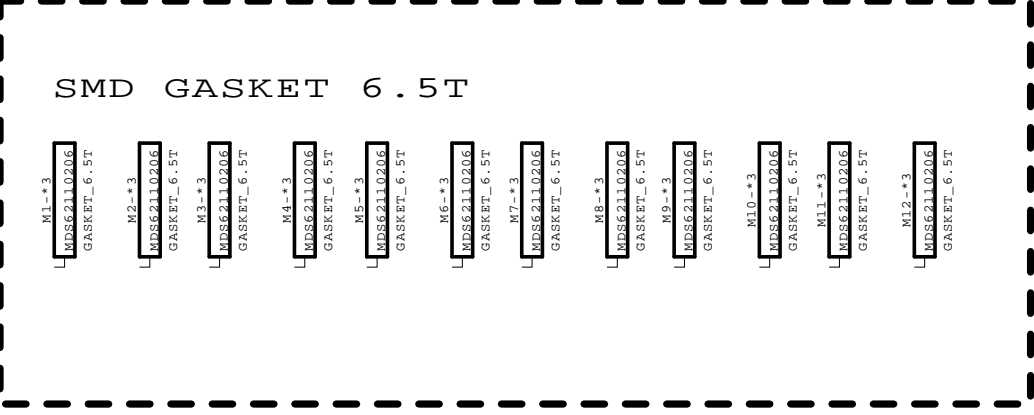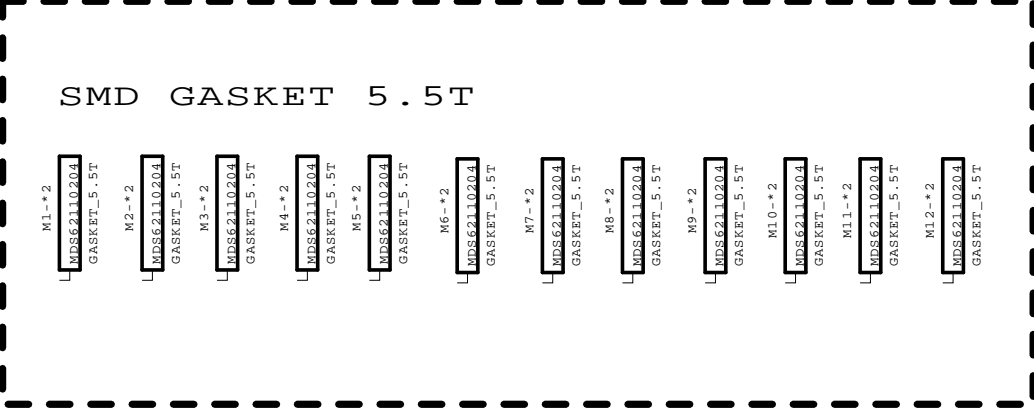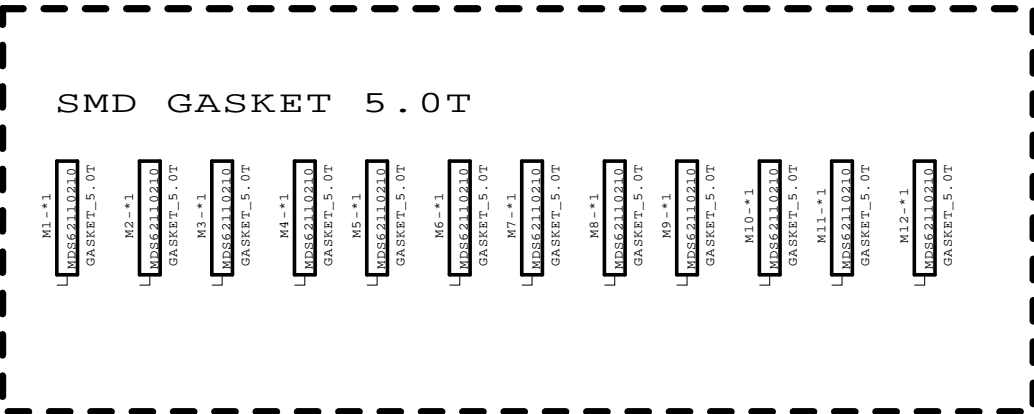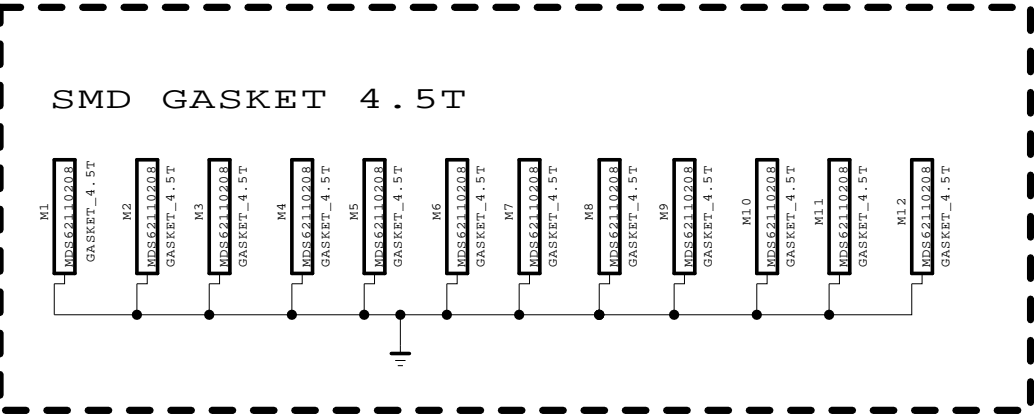SMD GASKET



THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FILRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.








SECRET



LGElectronics

 LG ELECTRONICS

MODEL	BCM35230	DATE	2010. 09. 18
BLOCK	SMD GASKET	SHEET	56 /

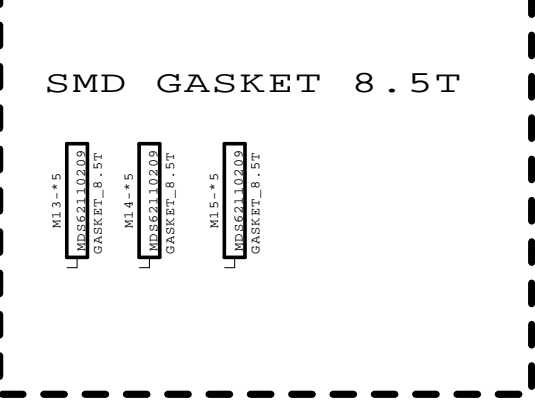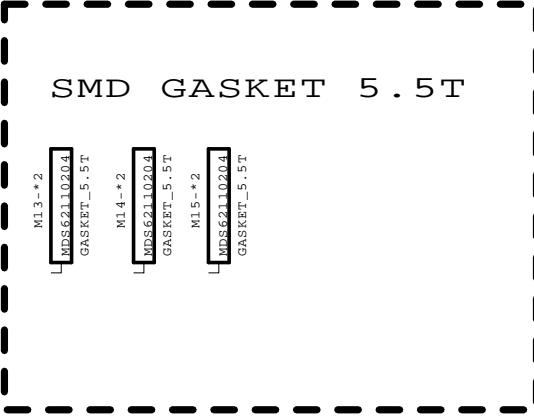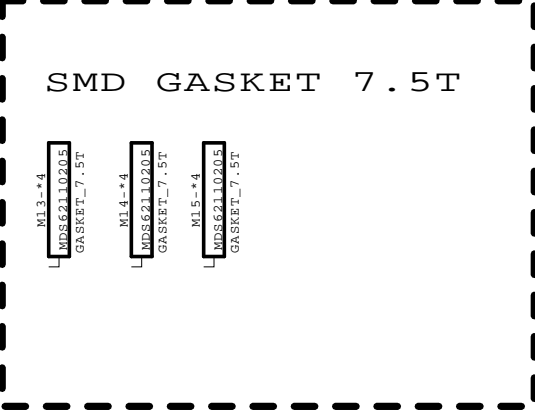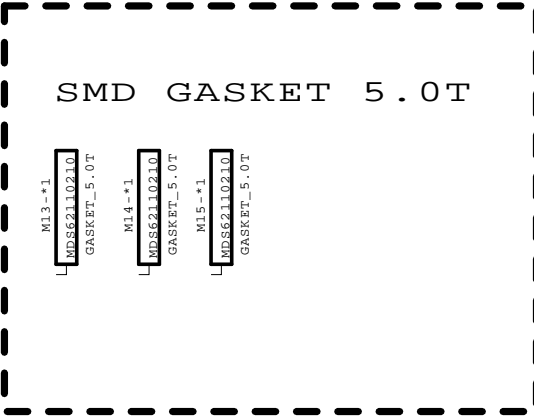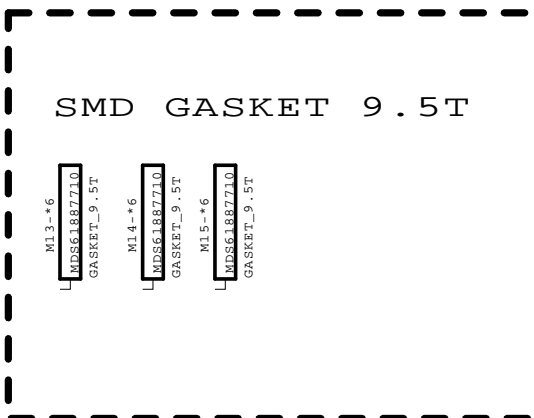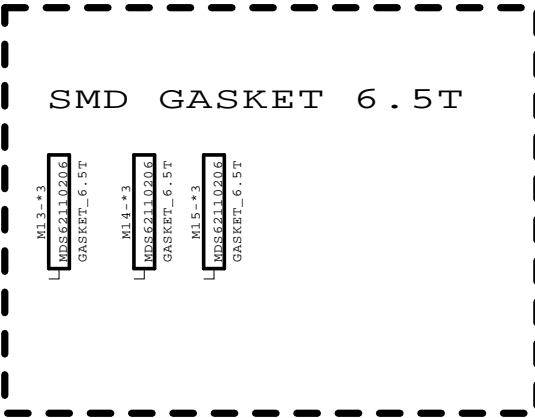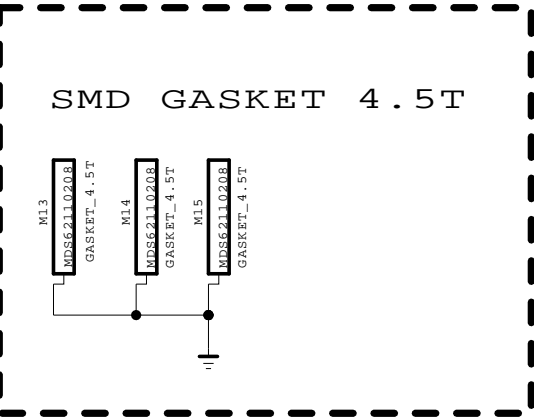SMD GASKET (UNDER THE TUNER)



THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FILRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.

SECRET


LGElectronics

 LG ELECTRONICS

MODEL	BCM35230	DATE	2010. 09. 18
BLOCK	TUNER SMD GASKET	SHEET	57 / 57

[illegible]

Power_DET

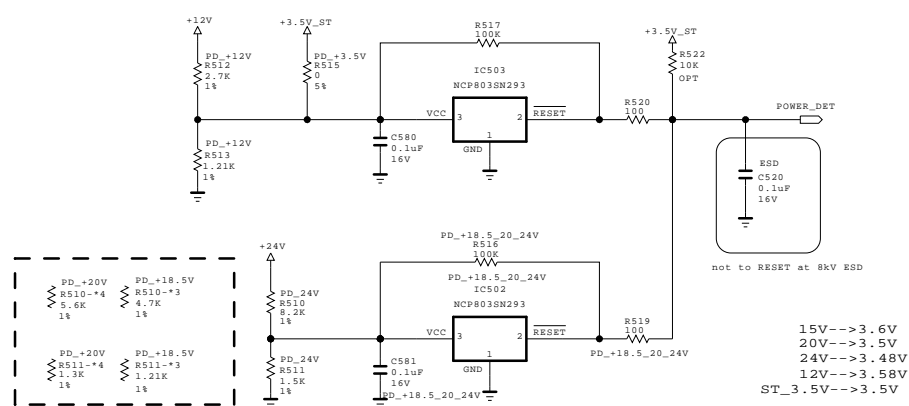

Placed on SMD-TOP

POWER_ON/OFF2_2

C503 100µF 16V

C505 10µF 16V

R503 1K

C504 100pF 50V

0.9V_CORE_FB

TPS40192DR

ENABLE 1

FB 2

COMP 3

VDD 4

PGD 5

EP_GND 10

HDRV 9

SN 8

BOOT 7

LDRV 6

BP5 6

R504 2K

R505 10K

R506 10K

R507 10K

C509 50µF 25V

C510 10µF 25V

C511 10µF 25V

C512 10µF 25V

C513 10µF 25V

C514 10µF 25V

C515 10µF 25V

C516 10µF 25V

C517 10µF 25V

C518 10µF 25V

C519 10µF 25V

C520 10µF 25V

C521 10µF 25V

C522 10µF 25V

C523 10µF 25V

C524 10µF 25V

C525 10µF 25V

C526 10µF 25V

C527 10µF 25V

C528 10µF 25V

C529 10µF 25V

C530 10µF 25V

C531 10µF 25V

C532 10µF 25V

C533 10µF 25V

C534 10µF 25V

C535 10µF 25V

C536 10µF 25V

C537 10µF 25V

C538 10µF 25V

C539 10µF 25V

C540 10µF 25V

C541 10µF 25V

C542 10µF 25V

C543 10µF 25V

C544 10µF 25V

C545 10µF 25V

C546 10µF 25V

C547 10µF 25V

C548 10µF 25V

C549 10µF 25V

C550 10µF 25V

C551 10µF 25V

C552 10µF 25V

C553 10µF 25V

C554 10µF 25V

C555 10µF 25V

C556 10µF 25V

C557 10µF 25V

C558 10µF 25V

C559 10µF 25V

C560 10µF 25V

C561 10µF 25V

C562 10µF 25V

C563 10µF 25V

C564 10µF 25V

C565 10µF 25V

C566 10µF 25V

C567 10µF 25V

C568 10µF 25V

C569 10µF 25V

C570 10µF 25V

C571 10µF 25V

C572 10µF 25V

C573 10µF 25V

C574 10µF 25V

C575 10µF 25V

C576 10µF 25V

C577 10µF 25V

C578 10µF 25V

C579 10µF 25V

C580 10µF 25V

C581 10µF 25V

C582 10µF 25V

C583 10µF 25V

C584 10µF 25V

C585 10µF 25V

C586 10µF 25V

C587 10µF 25V

C588 10µF 25V

C589 10µF 25V

C590 10µF 25V

C591 10µF 25V

C592 10µF 25V

C593 10µF 25V

C594 10µF 25V

C595 10µF 25V

C596 10µF 25V

C597 10µF 25V

C598 10µF 25V

C599 10µF 25V

C600 10µF 25V

C601 10µF 25V

C602 10µF 25V

C603 10µF 25V

C604 10µF 25V

C605 10µF 25V

C606 10µF 25V

C607 10µF 25V

C608 10µF 25V

C609 10µF 25V

C610 10µF 25V

C611 10µF 25V

C612 10µF 25V

C613 10µF 25V

C614 10µF 25V

C615 10µF 25V

C616 10µF 25V

C617 10µF 25V

C618 10µF 25V

C619 10µF 25V

C620 10µF 25V

C621 10µF 25V

C622 10µF 25V

C623 10µF 25V

C624 10µF 25V

C625 10µF 25V

C626 10µF 25V

C627 10µF 25V

C628 10µF 25V

C629 10µF 25V

C630 10µF 25V

C631 10µF 25V

C632 10µF 25V

C633 10µF 25V

C634 10µF 25V

C635 10µF 25V

C636 10µF 25V

C637 10µF 25V

C638 10µF 25V

C639 10µF 25V

C640 10µF 25V

C641 10µF 25V

C642 10µF 25V

C643 10µF 25V

C644 10µF 25V

C645 10µF 25V

C646 10µF 25V

C647 10µF 25V

C648 10µF 25V

C649 10µF 25V

C650 10µF 25V

C651 10µF 25V

C652 10µF 25V

C653 10µF 25V

C654 10µF 25V

C655 10µF 25V

C656 10µF 25V

C657 10µF 25V

C658 10µF 25V

C659 10µF 25V

C660 10µF 25V

C661 10µF 25V

C662 10µF 25V

C663 10µF 25V

C664 10µF 25V

C665 10µF 25V

C666 10µF 25V

C667 10µF 25V

C668 10µF 25V

C669 10µF 25V

C670 10µF 25V

C671 10µF 25V

C672 10µF 25V

C673 10µF 25V

C674 10µF 25V

C675 10µF 25V

C676 10µF 25V

C677 10µF 25V

C678 10µF 25V

C679 10µF 25V

C680 10µF 25V

C681 10µF 25V

C682 10µF 25V

C683 10µF 25V

C684 10µF 25V

C685 10µF 25V

C686 10µF 25V

C687 10µF 25V

C688 10µF 25V

C689 10µF 25V

C690 10µF 25V

C691 10µF 25V

C692 10µF 25V

C693 10µF 25V

C694 10µF 25V

C695 10µF 25V

C696 10µF 25V

C697 10µF 25V

C698 10µF 25V

C699 10µF 25V

C700 10µF 25V

C701 10µF 25V

C702 10µF 25V

C703 10µF 25V


C704 10µF 25V

C705 10µF 25V

C706 10µF 25V


C707 10µF

SECRET
LGElectronics

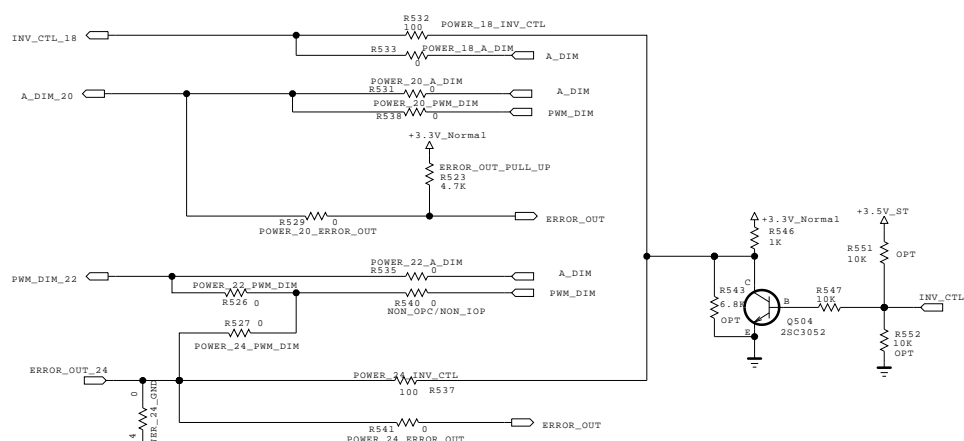
OS Module OPT

PIN No	LGD	CMO (09)	AUO	SHARP
18	INV_ON	A-DIM	INV_ON	INV_ON
20	V4:VBR-A V5:NC	NC	Err_out	Err_out
22	PWM_DIM	PWM_DIM	A-DIM	PWM_DIM
24	Err_out LED:GND	INV_ON	PWM_DIM	GND


+ 3 . 3V_NORMAL

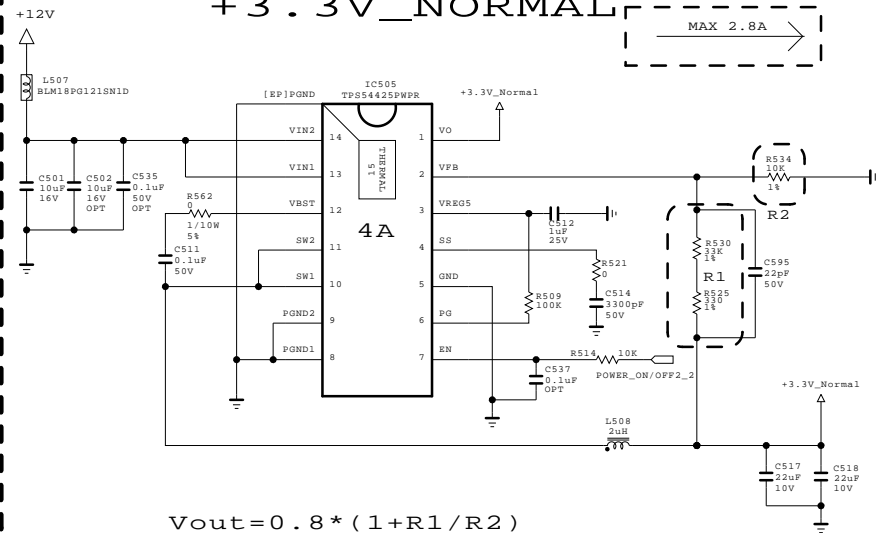
$$V_{out} = 0.8 * (1 + R1/R2)$$
[illegible]
$$V_{out} = 0.6 * (1 + R1/R2)$$


+1.5V_DDR

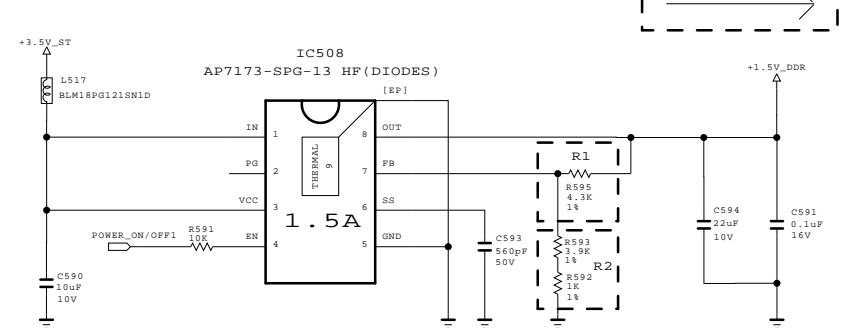
$$V_{out} = 0.8 * (1 + R1/R2)$$

+5V_Normal

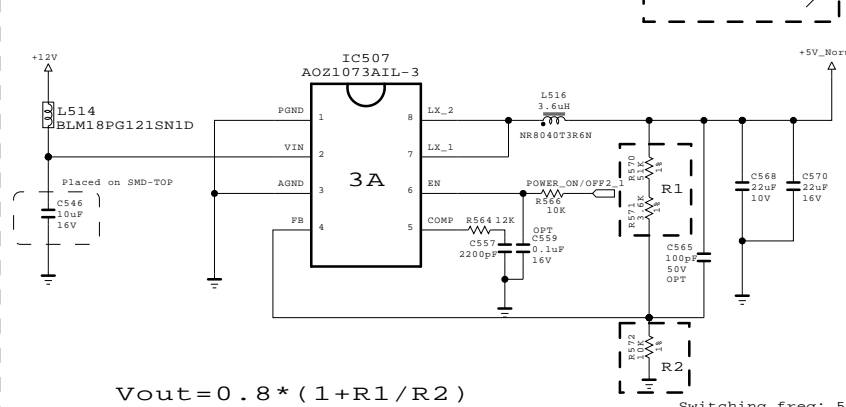
$$V_{out} = 0.8 * (1 + R1/R2)$$

+5V_USB+WIFI

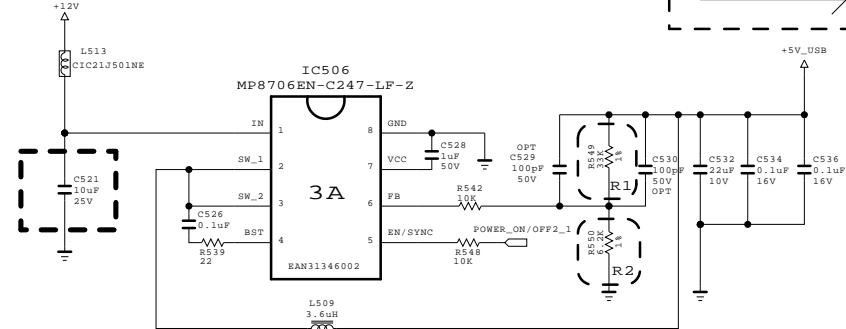
$$V_{out} = (1 + R_1 / R_2) * 0.8$$
$$V_{out} = 0.8 * (1 + R1/R2)$$

MODEL	BCM35230	DATE	
BLOCK	POWER	SHEET	5 / 58



LCD TV Repair Guide

`11 years New Models

< Applicable Model >

XXLW650W/S/G-ZC

XXLW570S/G

XXLW550T/W

T : UK T2/C


W : Nordic T2/C

S : Satellite


G : MHP

LD12C Main PCB for Broadband

XXLW5500/T/W/S-ZA
XXLW650W/G/S-ZA
XXLW570G/S-ZA

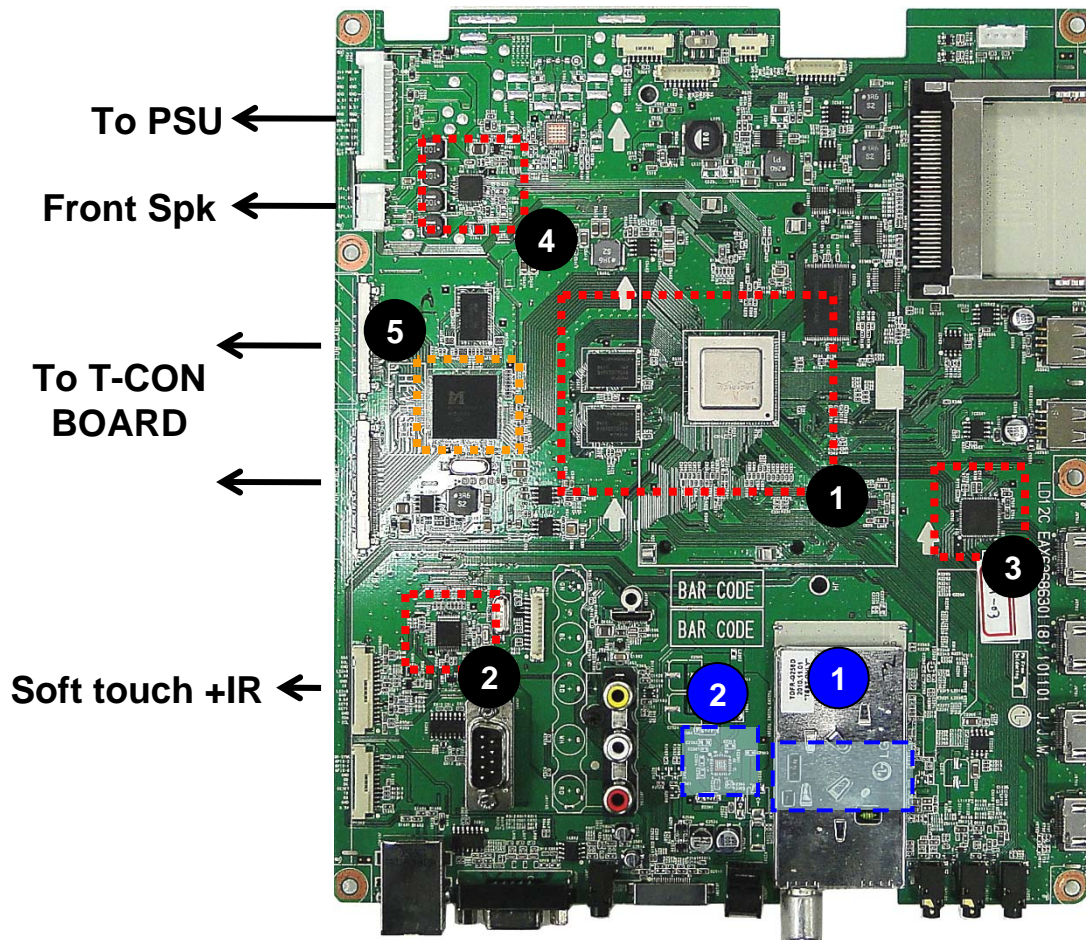


Main Board without T-con b'd

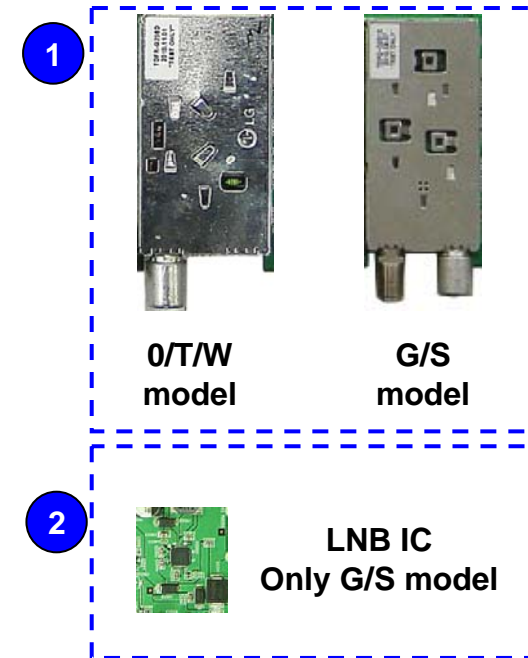


- 1 Main processor, DDR Memory
Flash Memory
- 2 Micom for Key/IR sensing
- 3 HDMI switch (4:1)
- 4 Audio AMP (10W+10W)
- 5 URSA5 External FRC

LD12E Main PCB for Broadband

XXLV5500/T/W/G-ZA
XXLV570G/S-ZA

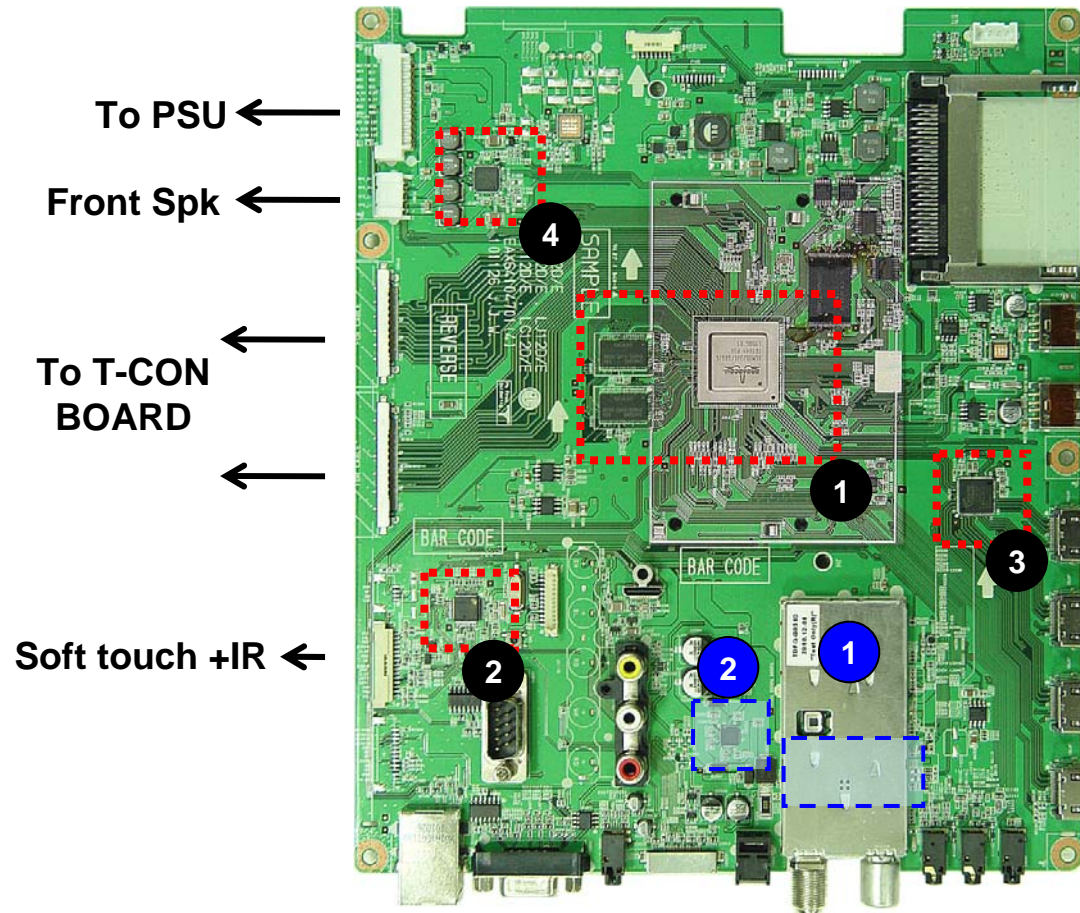


Main Board without T-con b'd

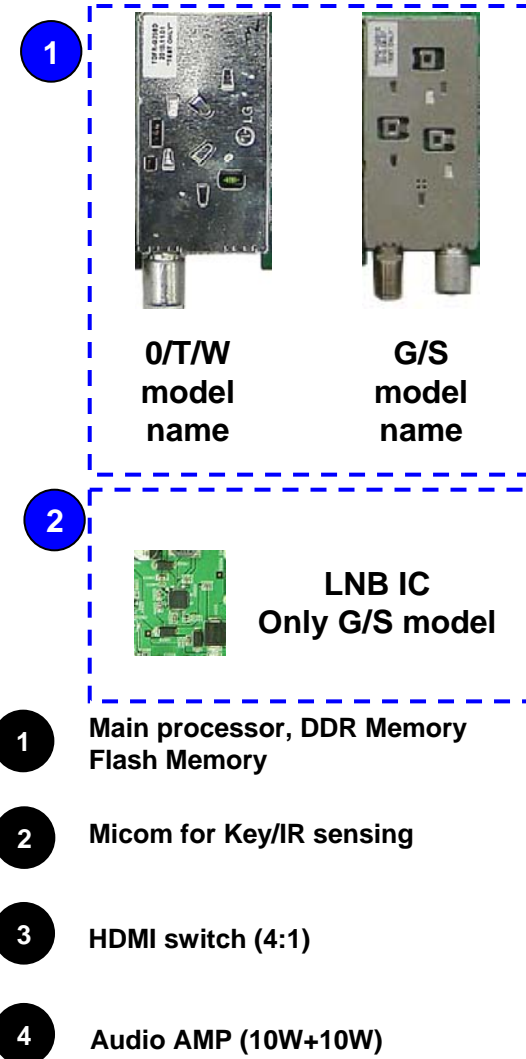

Interconnection - 1

XXLW550T/W/S-ZA
XXLW650W/G/S-ZA
XXLW570G/S-ZA

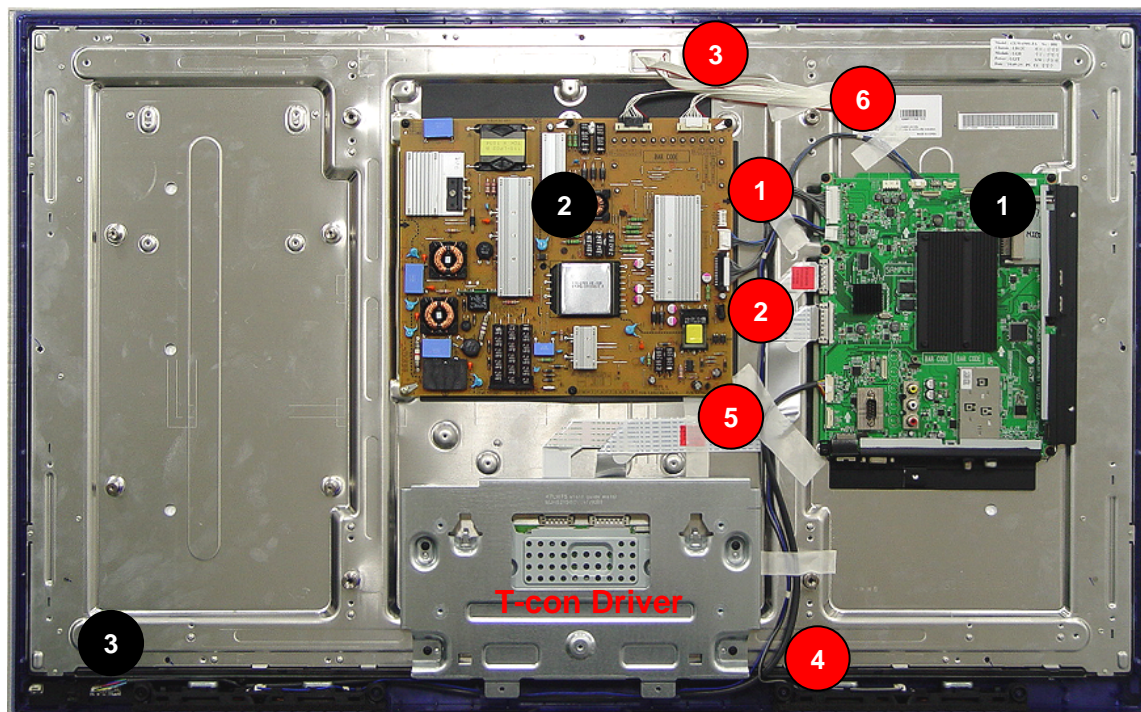

[PCBs]


- 1 Main PCB
- 2 Power Board
- 3 Soft touch + IR Key PCB

[Cables]

- 1 Main / PSU cable
- 2 Main / Module LVDS cable 41&51PIN
- 3 LED driver / PSU
- 4 15Pin (IR+Touch) Cable
- 5 SPK Cable
- 6 Local Dimming Cable

Interconnection - 3

42/47LV5500/T/W/G-ZA
42/47LV570G/S-ZA

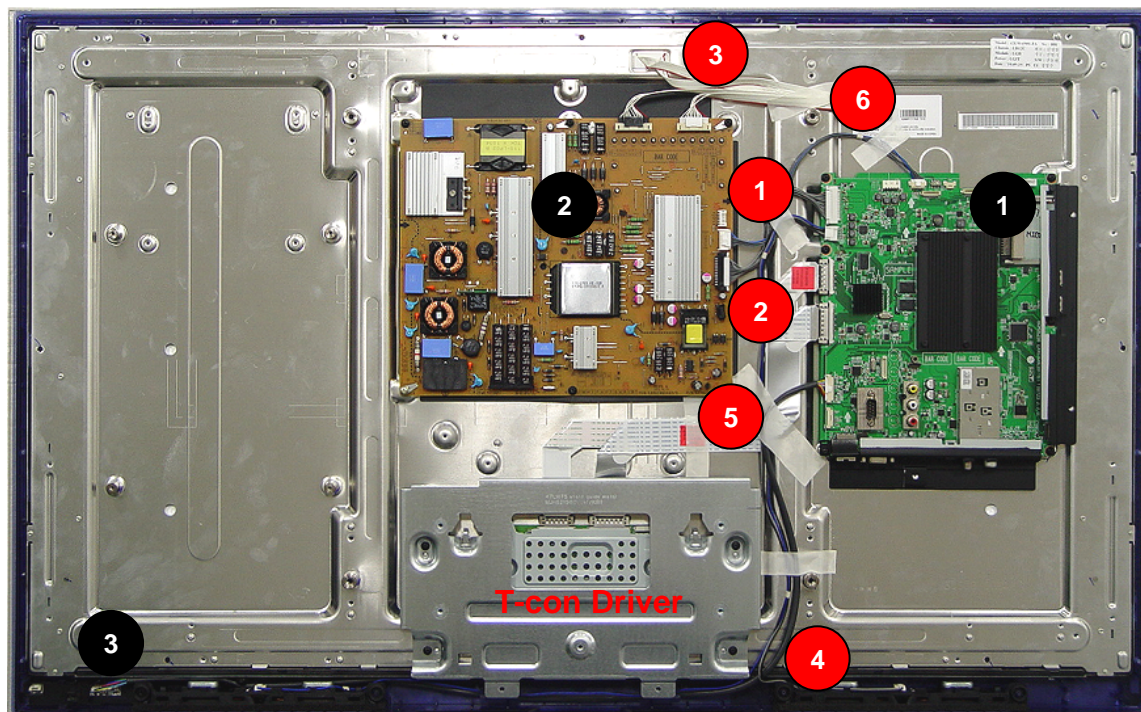

[PCBs]

- 1 Main PCB
- 2 Power Board
- 3 Soft touch + IR Key PCB (LV570 only IR Assy)


[Cables]

- 1 Main / PSU cable
- 2 Main / Module LVDS cable 41&51PIN
- 3 LED driver / PSU
- 4 15Pin (IR+Touch) Cable
- 5 SPK Cable
- 6 Local Dimming Cable

**Same interconnection LW or LV serie
in the 42"/47"**

Interconnection - 2

32/37LV5500/T/W/G-ZA
32/37LV570G/S-ZA

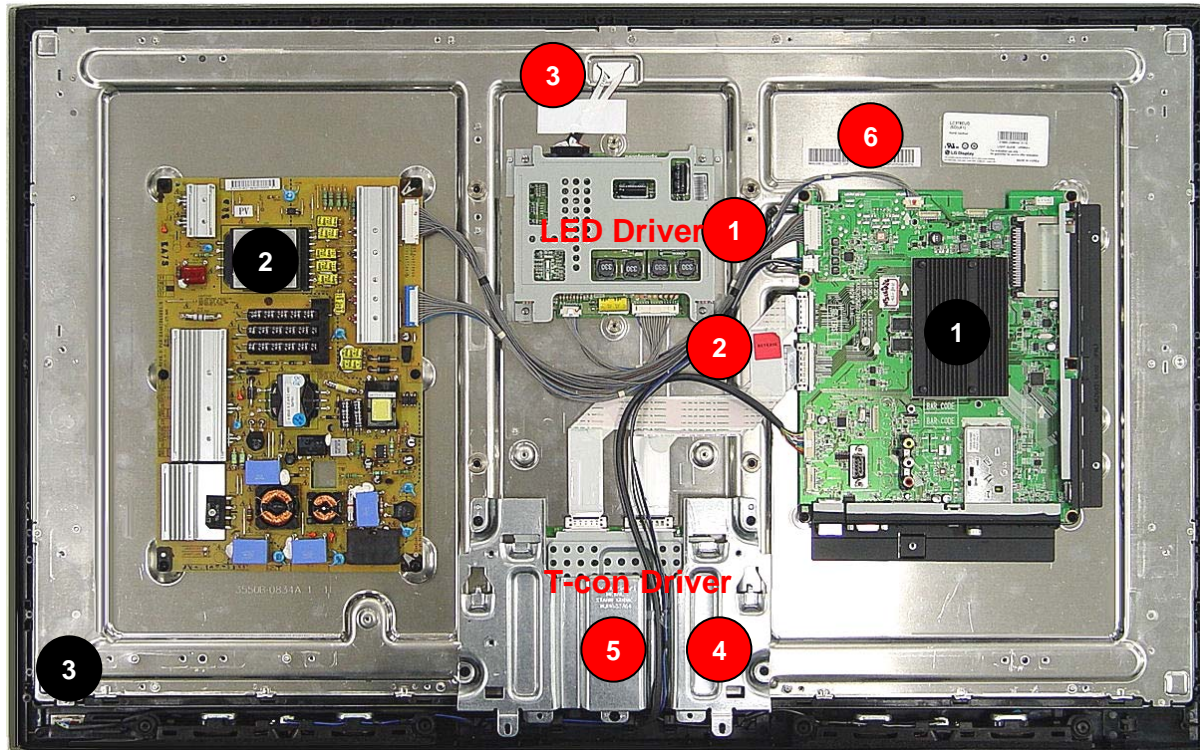

[PCBs]

- 1 Main PCB
- 2 Power Board
- 3 Soft touch + IR Key PCB (LW570 only IR Assy)

[Cables]

- 1 Main / PSU cable
- 2 Main / Module LVDS cable 41&51PIN
- 3 LED driver / PSU
- 4 15Pin (IR+Touch) Cable
- 5 SPK Cable
- 6 Local Dimming Cable


Contents of LCD TV Standard Repair Process

No.	Error symptom (High category)	Error symptom (Mid category)	Page	Remarks
1	A. Video error	No video/Normal audio	1	
2		No video/No audio	2	
3		Video error, video lag/stop, fail tuning	3, 4	
4		Color error	5	
5		Vertical/Horizontal bar, residual image, light spot, external device color error	6	
6	B. Power error	No power	7	
7		Off when on, off while viewing, power auto on/off	8	
8	C. Audio error	No audio/Normal video	9	
9		Wrecked audio/discontinuation/noise	10	
10	D. Function error	No response in remote controller, key error, recording error, memory error	11	
11		External device recognition error	12	
12	E. Noise	Circuit noise, mechanical noise	13	
13	F. Exterior error	Exterior defect	14	

First of all, Check whether there is SVC Bulletin in GCSC System for these model.

LCD TV	Error symptom	A. Video error	Established date	2010. 12 .14	1/14
		No video/ Normal audio	Revised date		


First of all, Check whether all of cables between board is inserted properly or not.
(Main B/D↔ Power B/D, LVDS Cable,Speaker Cable,IR B/D Cable,,)

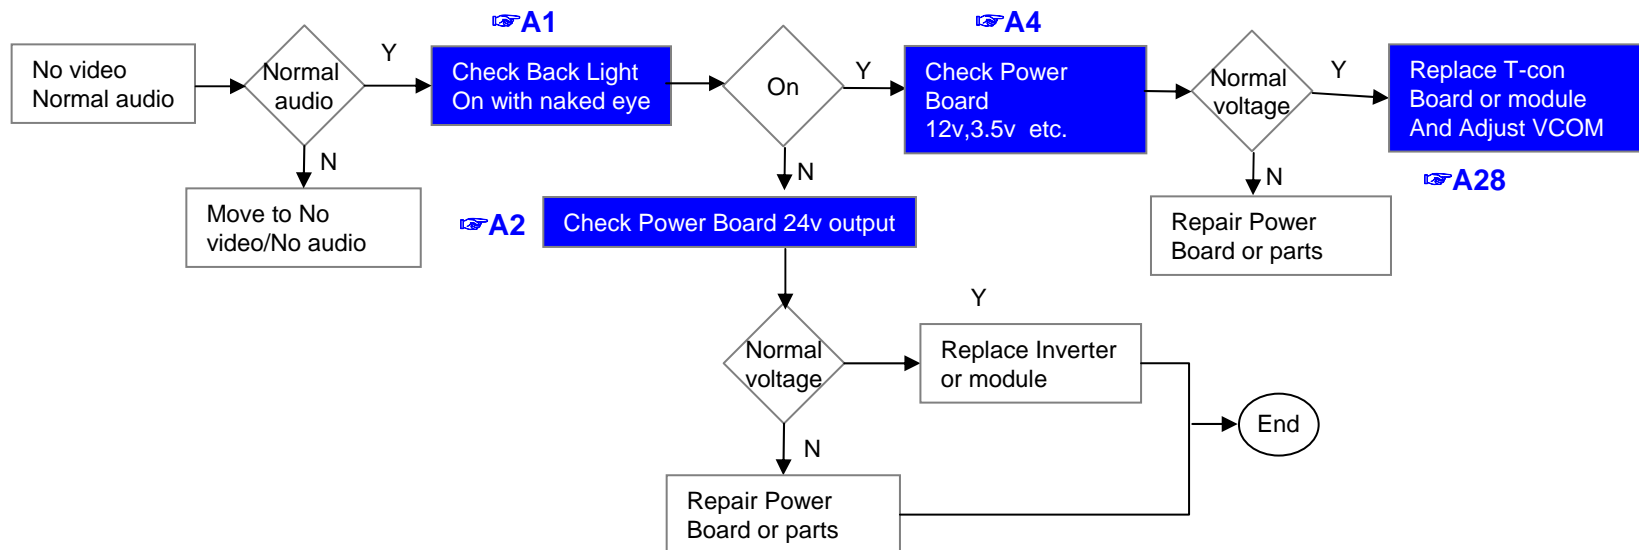

※Precaution A7 & A3



LCD TV	Error symptom	A. Video error	Established date	2010. 12 .14	
		No video/ No audio	Revised date		2/14

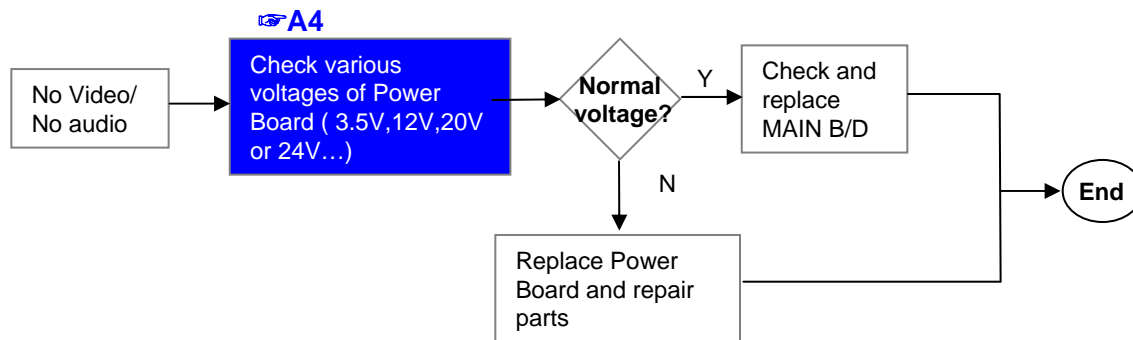


LCD TV	Error symptom	A. Picture Problem	Established date	2010. 12 .14	
		Picture broken/ Freezing	Revised date		3/14

👉 A6

Check RF Signal level

- . By using Digital signal level meter
- . By using Diagnostics menu on OSD
(Menu → Set up → Support → Signal Test)
- Signal strength (Normal : over 50%)
- Signal Quality (Normal: over 50%)

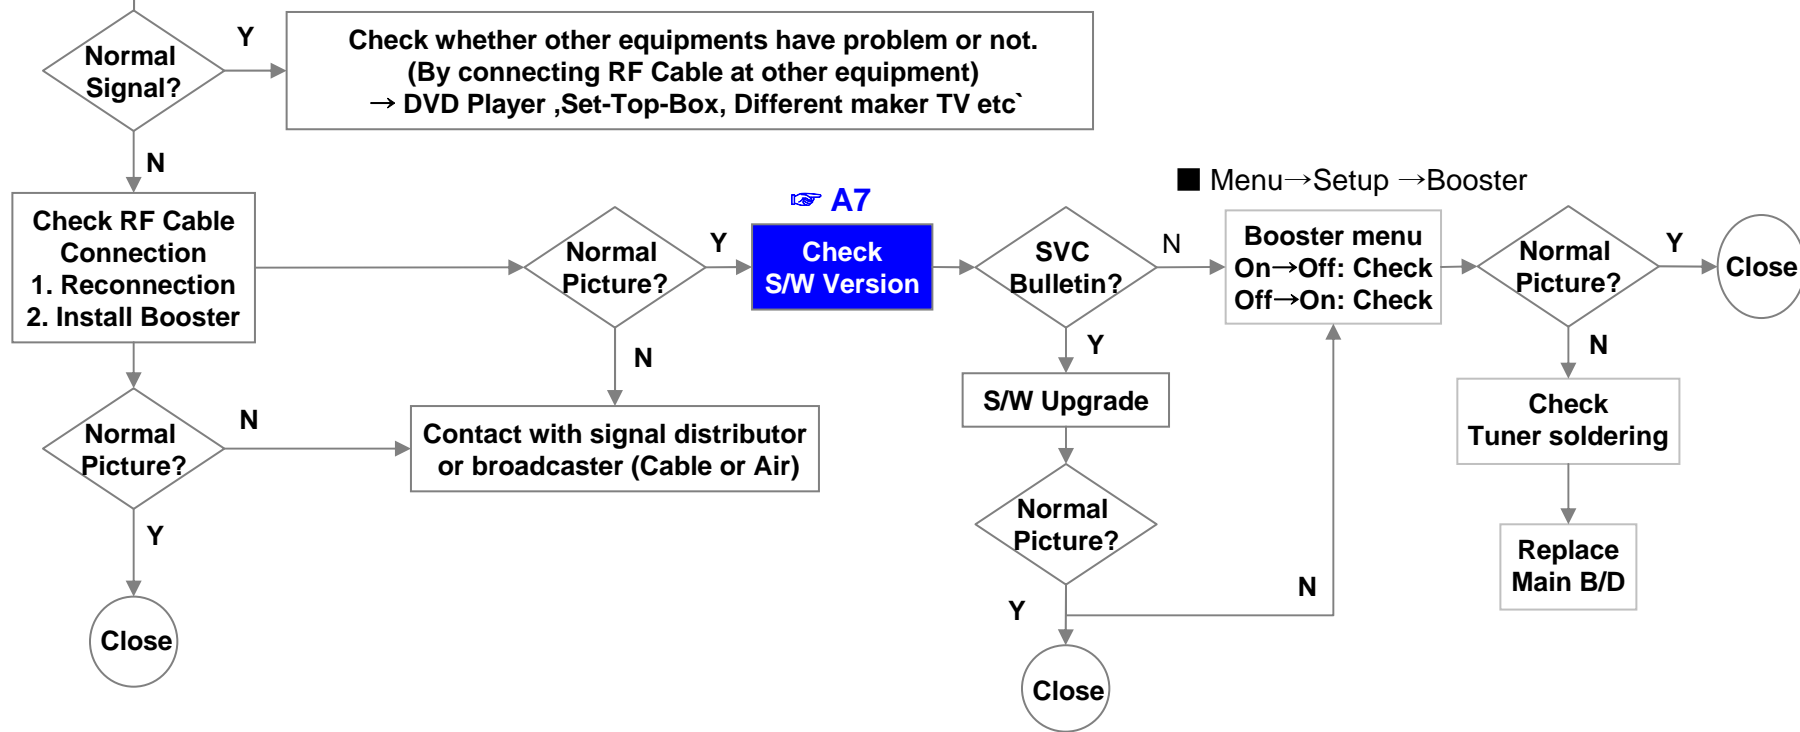


LCD TV	Error symptom	A. Picture Problem (DVB-S/S2)	Established date	2011. 01 .24	
		Tuning fail, Picture broken/ Freezing	Revised date		4/14


A6

Check RF Signal level

Check RF signal cable (DVB satellite signal or not)
 Check whether other equipments have problem or not.
 (By connecting RF Cable at other equipment)
 → Set-Top-Box, Different maker TV etc

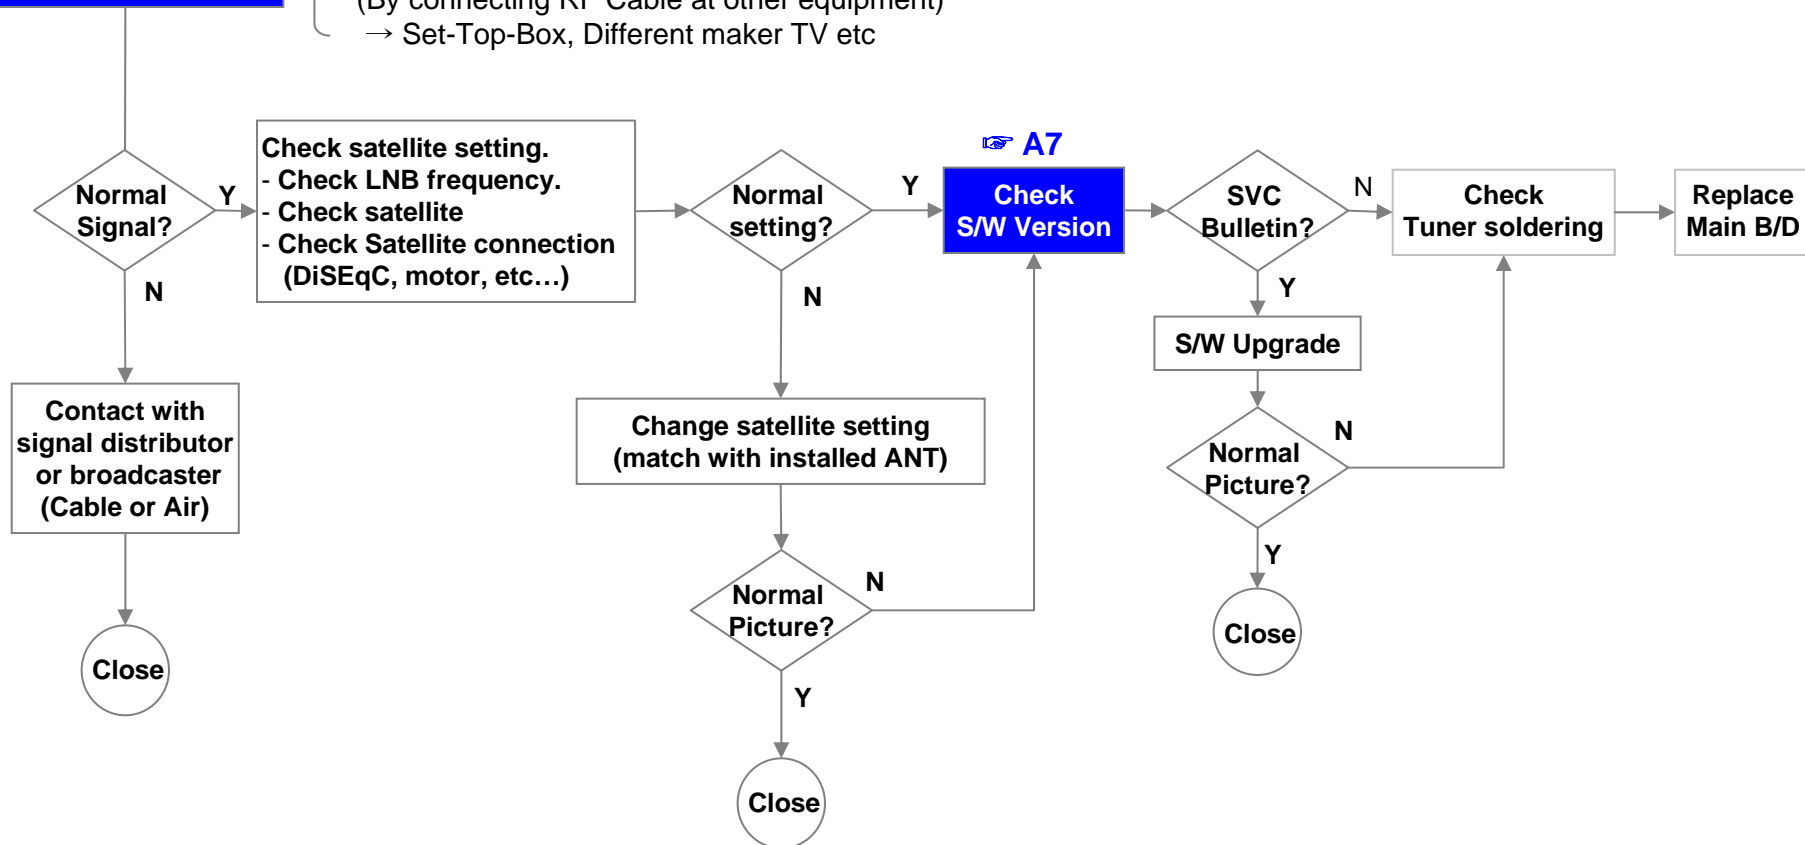

LCD TV	Error symptom	A. Video error	Established date	2010. 12 .14	
		Color error	Revised date		5/14

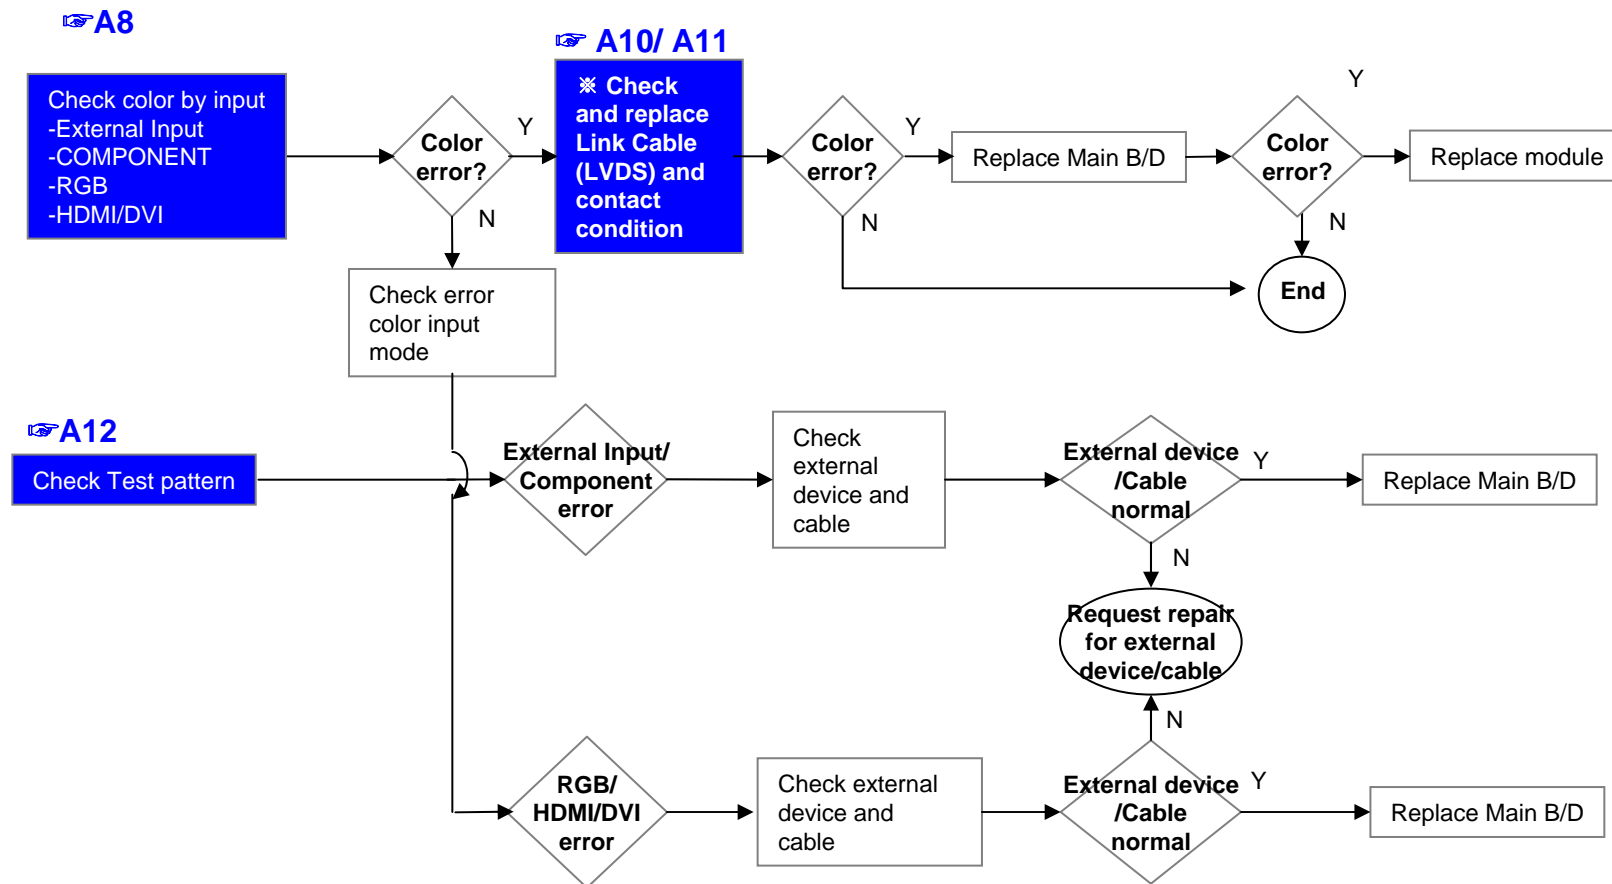

LCD TV	Error symptom	A. Video error	Established date	2010. 12 .14	
		Vertical / Horizontal bar, residual image, light spot, external device color error	Revised date		6/14

Vertical/Horizontal bar, residual image, light spot

A8

Check color condition by input
 -External Input
 -Component
 -RGB
 -HDMI/DVI

A12

Check Test pattern

Screen normal?

Replace module

Check external device connection condition

Normal?

Request repair for external device

A10/ A11

Check and replace Link Cable

Screen normal?

End

A28

Replace Main B/D (adjust VCOM)
 For LGD panel

Replace Main B/D
 For other panel

For other panel

Replace Module

Screen normal?

End

External device screen error-Color error

Check S/W Version

Check version

S/W Upgrade

Normal screen?

End

Check screen condition by input
 -External Input
 -Component
 -RGB
 -HDMI/DVI

External Input error

Component error

RGB error

HDMI/DVI error

Connect other external device and cable
 (Check normal operation of External Input, Component, RGB and HDMI/DVI by connecting Jig, pattern Generator, Set-top Box etc.)

Connect other external device and cable
 (Check normal operation of External Input, Component, RGB and HDMI/DVI by connecting Jig, pattern Generator, Set-top Box etc.)

Screen normal?

Replace Main B/D

Request repair for external device

Screen normal?

Replace Main B/D

LCD TV

Error
symptom

B. Power error


Established
date

2010. 12 .14

No power

Revised date

7/14

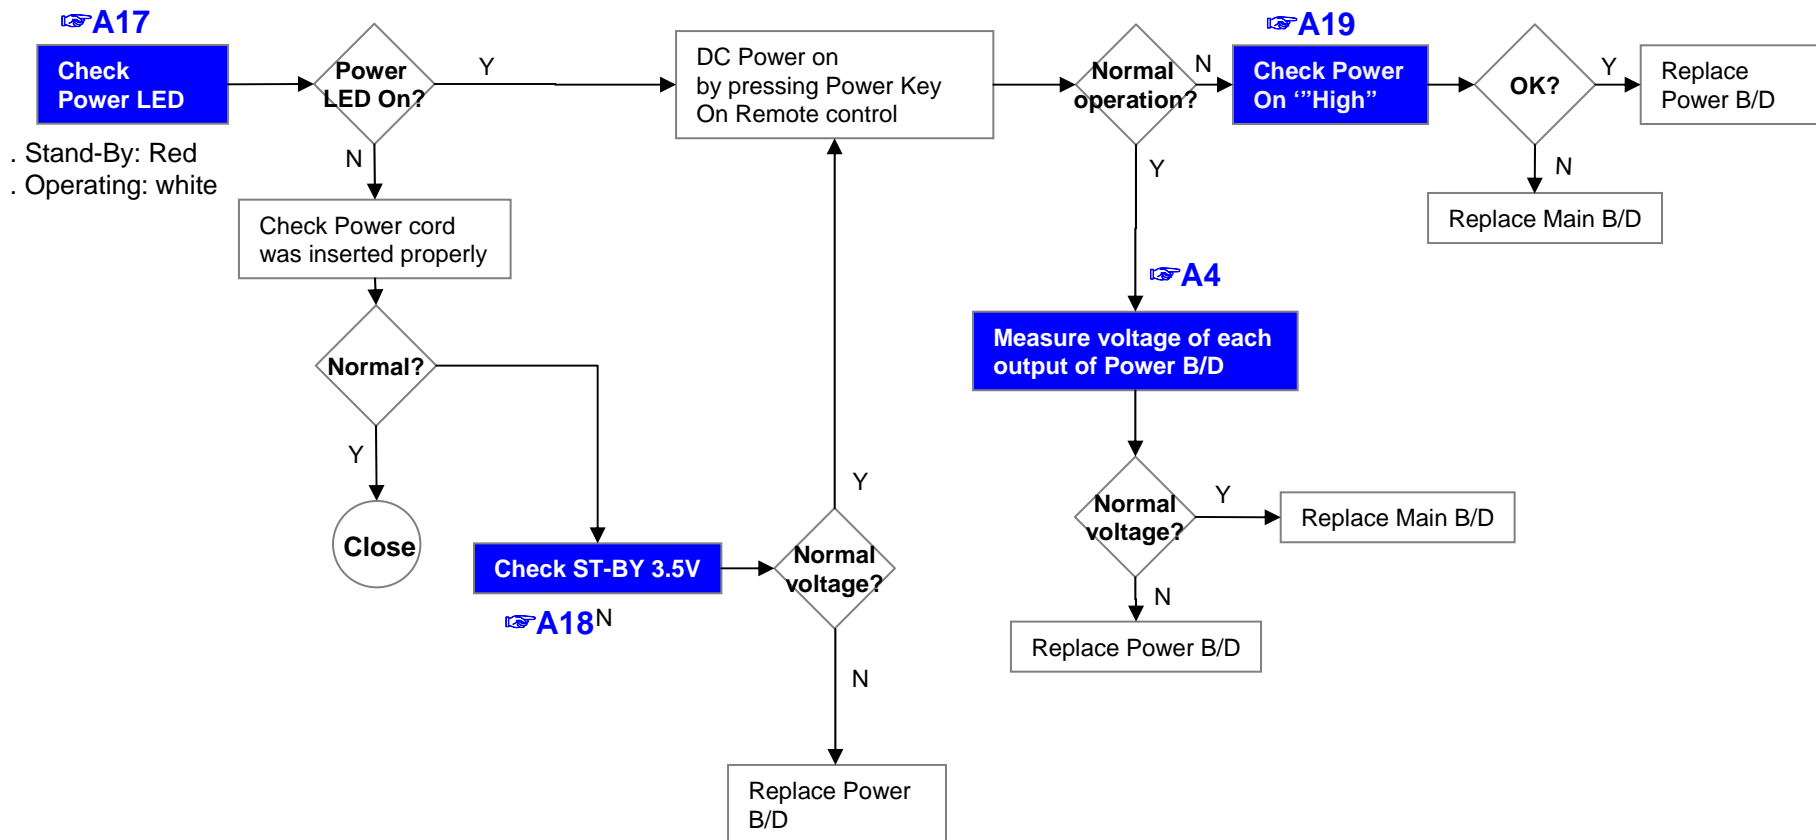

LCD TV

Error
symptom

B. Power error


Established
date

2010. 12 .14

Off when on, off while viewing, power auto on/off

Revised date

8/14

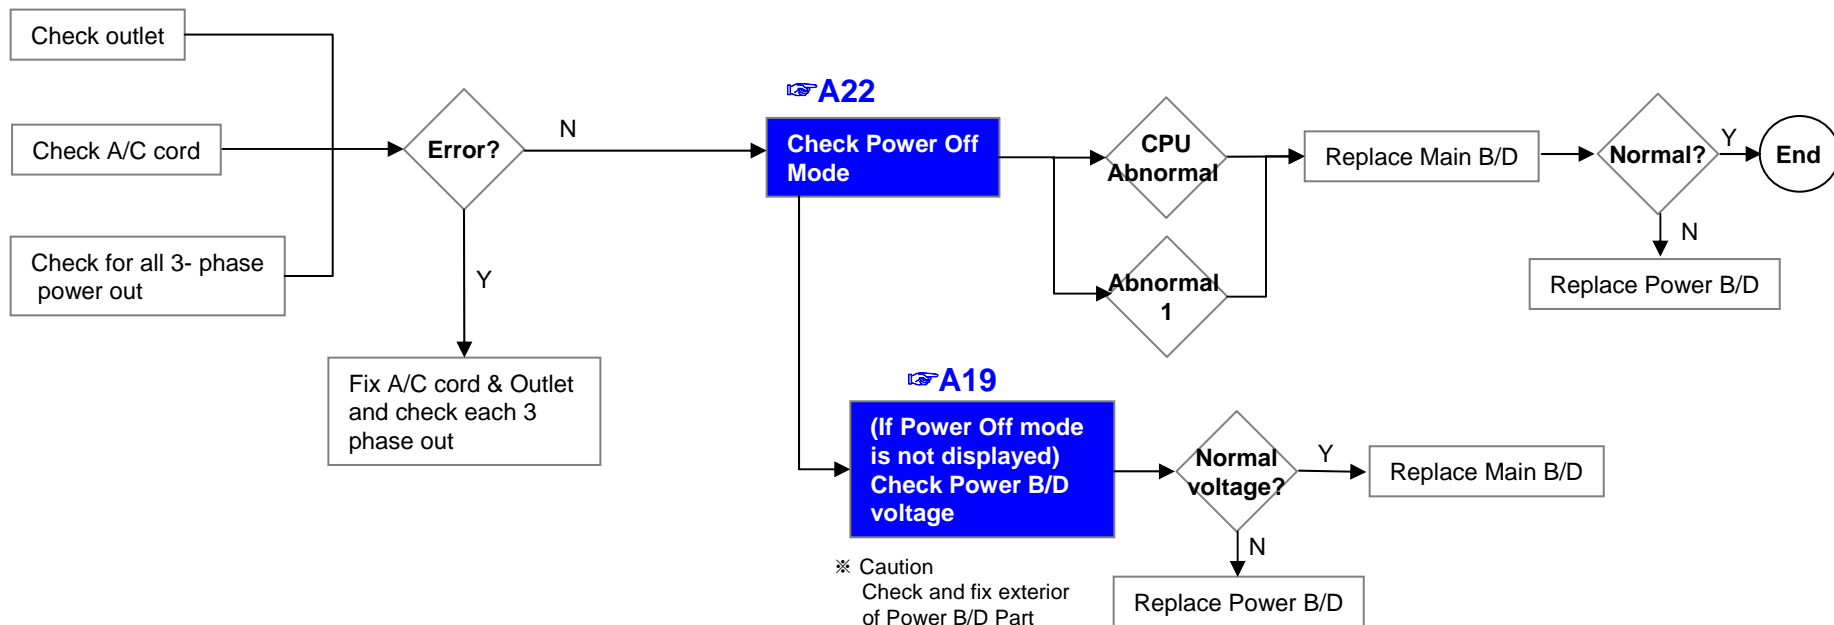

* Please refer to the all cases which can be displayed on power off mode.

Status	Power off List	Explanation
Normal	"POWEROFF_REMOTEKEY"	Power off by REMOTE CONTROL
	"POWEROFF_OFFTIMER"	Power off by OFF TIMER
	"POWEROFF_SLEEPTIMER"	Power off by SLEEP TIMER
	"POWEROFF_INSTOP"	Power off by INSTOP KEY
	"POWEROFF_AUTOOFF"	Power off by AUTO OFF
	"POWEROFF_ONTIMER"	Power off by ON TIMER
	"POWEROFF_RS232C"	Power off by RS232C
	"POWEROFF_RESREC"	Power off by Reserved Record
	"POWEROFF_RECEND"	Power off by End of Recording
	"POWEROFF_SWDOWN"	Power off by S/W Download
	"POWEROFF_UNKNOWN"	Power off by unknown status except listed case
Abnormal	"POWEROFF_ABNORMAL1"	Power off by abnormal status except CPU trouble
	"POWEROFF_CPUABNORMAL"	Power off by CPU Abnormal

LCD TV

Error
symptom

C. Audio error


Established
date

2010. 12 .14

No audio/ Normal video

Revised date

9/14

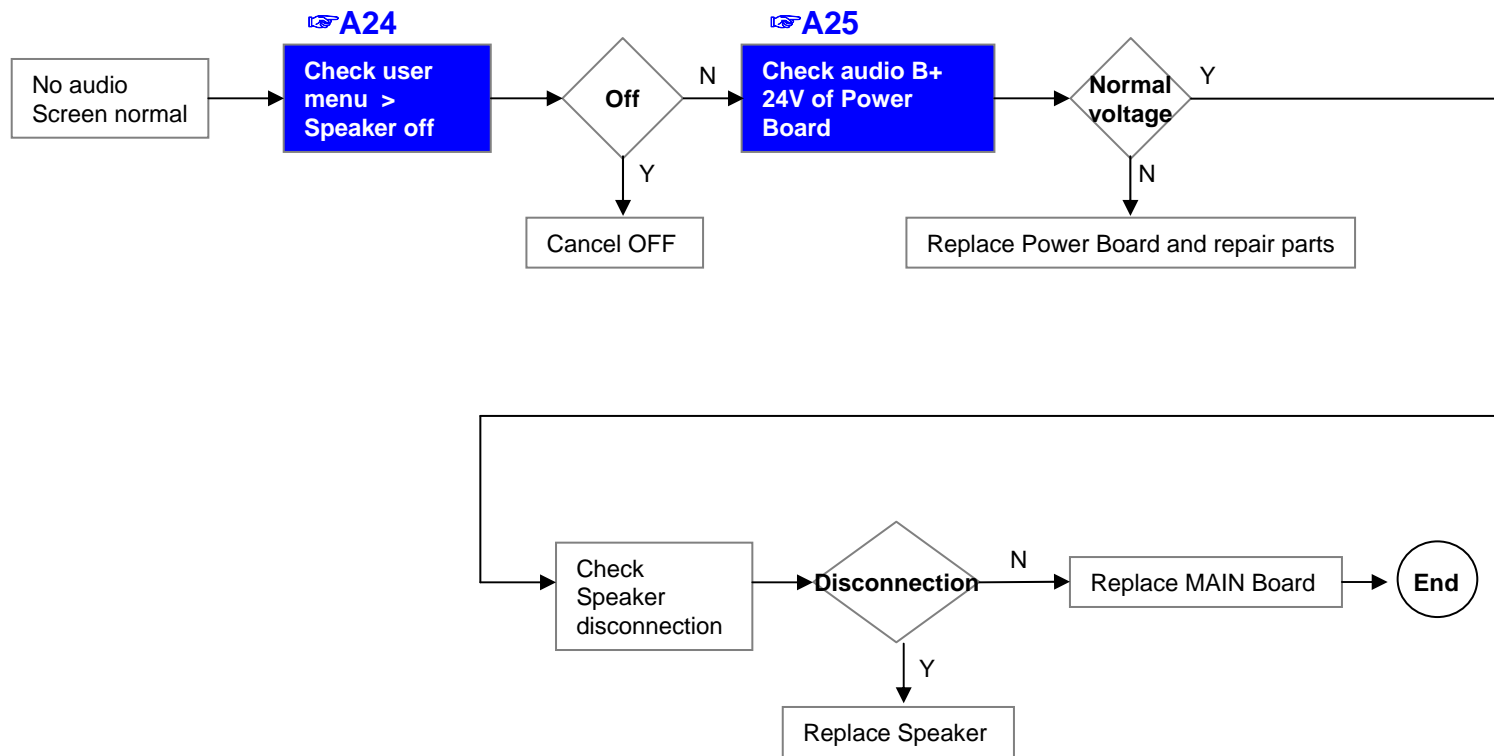

LCD TV

Error
symptom

C. Audio error

Established
date


2010. 12 .14

Wrecked audio/ discontinuation/noise

Revised date


10/14

→ abnormal audio/discontinuation/noise is same after “Check input signal” compared to No audio

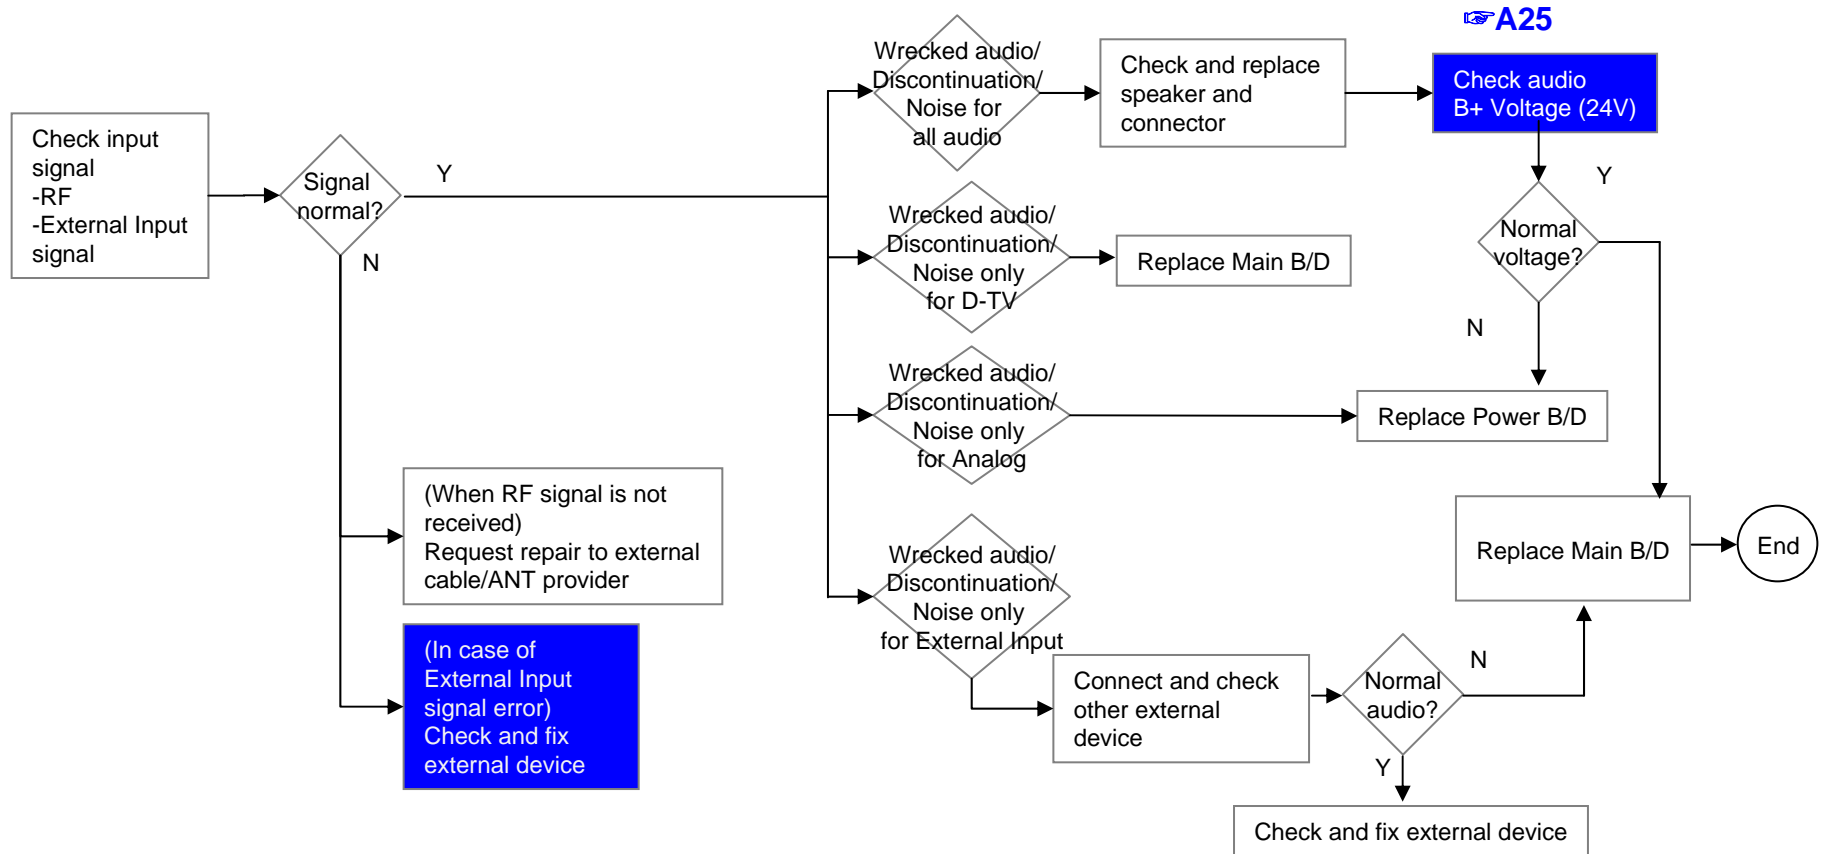

LCD TV	Error symptom	D. General Function Problem	Established date	2010. 12 .14	
		Remote control & Local switch checking	Revised date		11/14

1. Remote control(R/C) operating error

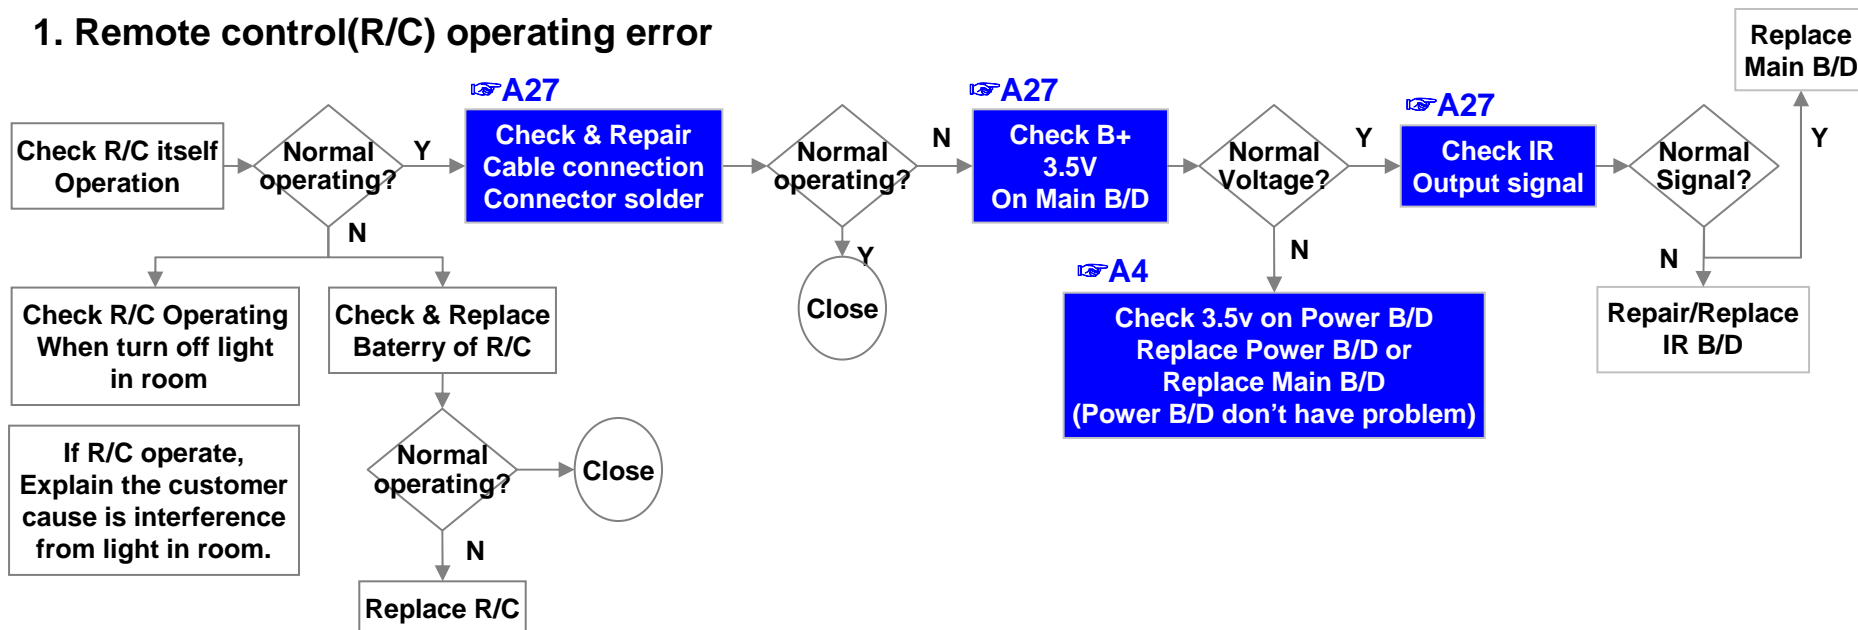

LCD TV


Error
symptom**D. Function error**Established
date

2010. 12 .14


External device recognition error

Revised date

12/14

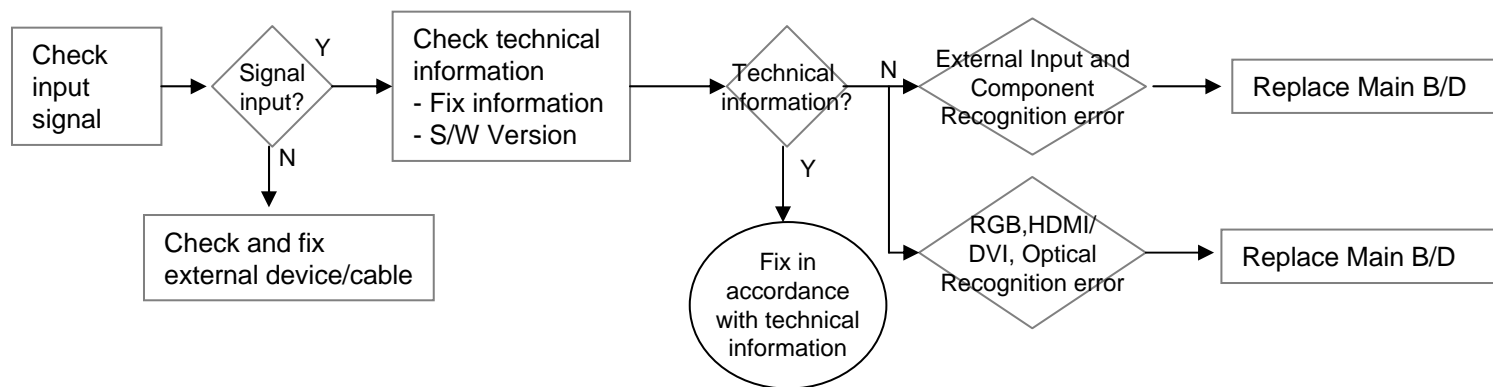

LCD TV	Error symptom	E. Noise	Established date	2010. 12 .14	
		Circuit noise, mechanical noise	Revised date		13/14

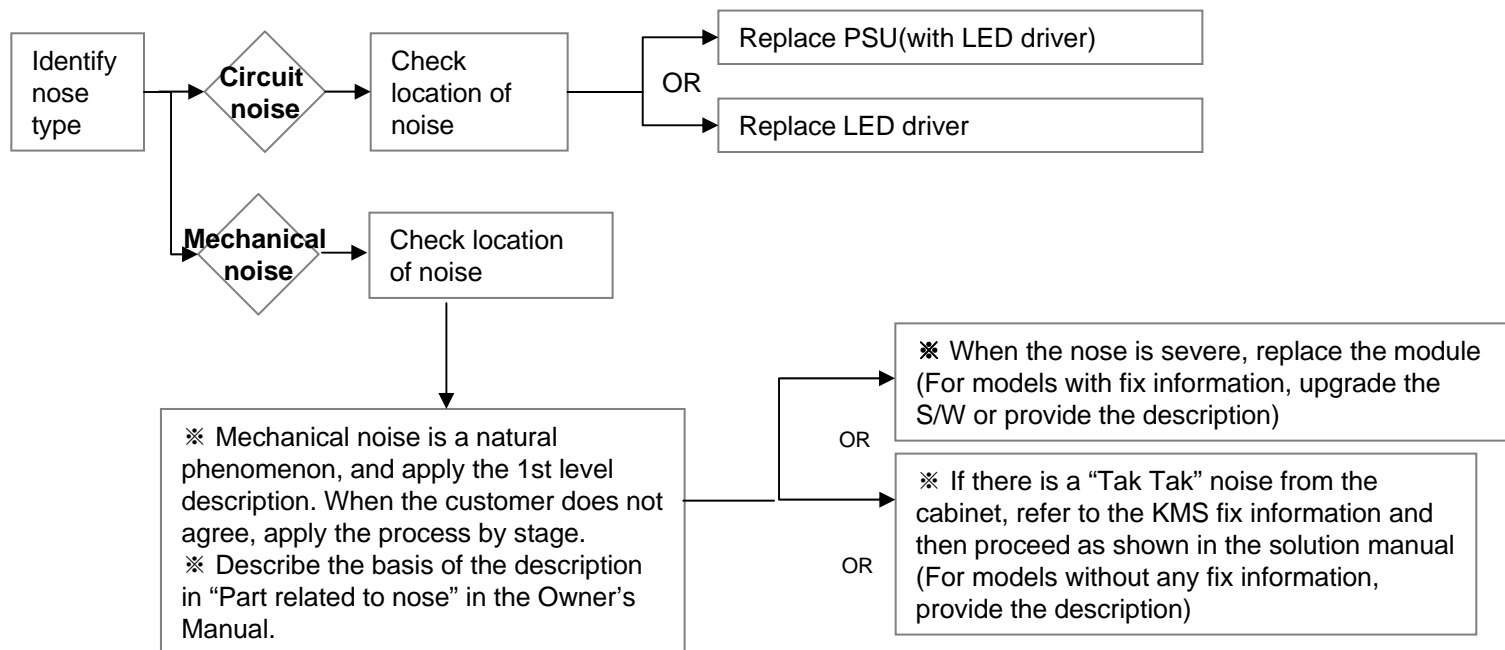

LCD TV	Error symptom	F. Exterior defect	Established date	2010. 12 .14	
		Exterior defect	Revised date		14/14

